



SIZE A	DWG NO 19L0605WH2	SHT 2	REV 2
REV 2	DESCRIPTION ADD PS	DATE 10/29/03	APPROVED BTR

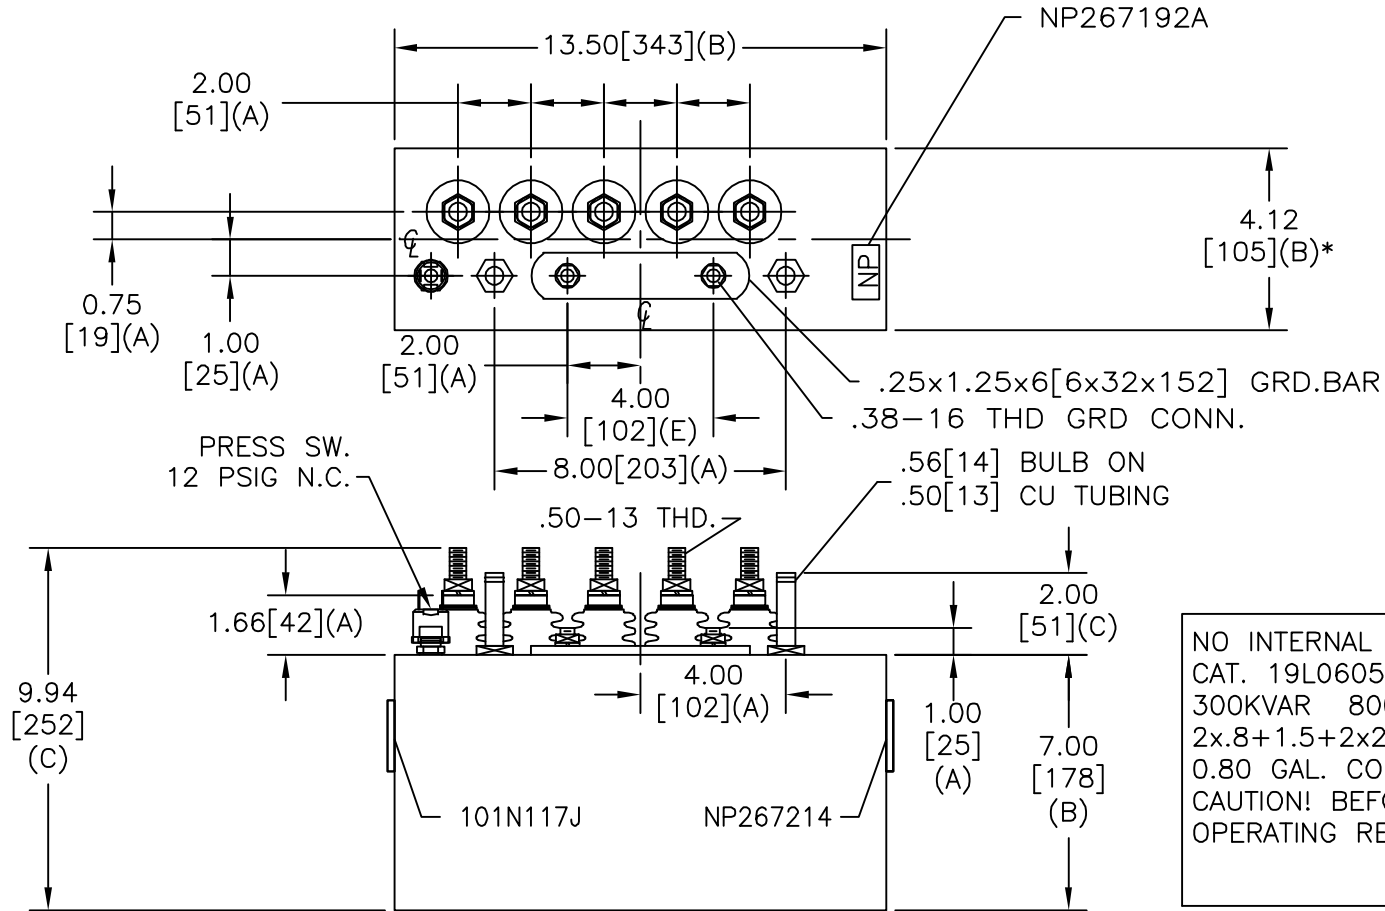

TERM	μF	kVAR
1	0.78	30
2	0.78	30
3	1.54	60
4	2.33	90
5	2.33	90

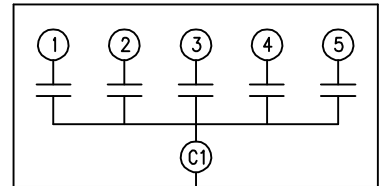

SCHMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0605WH2 SN
 300KVAR 800V 9600HZ 1PH
 2x.8+1.5+2x2.3 UF/TAP
 0.80 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	SIZE A	<h1 style="text-align: center;">OUTLINE</h1> <h2 style="text-align: center;">19L0605WH2</h2>
	DRAWN E. McGinn DATE APR 8, 1998	
ISSUED DATE 4/15/98	SCALE	SHEET 2 CONT ON -

DISTR. TO