



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

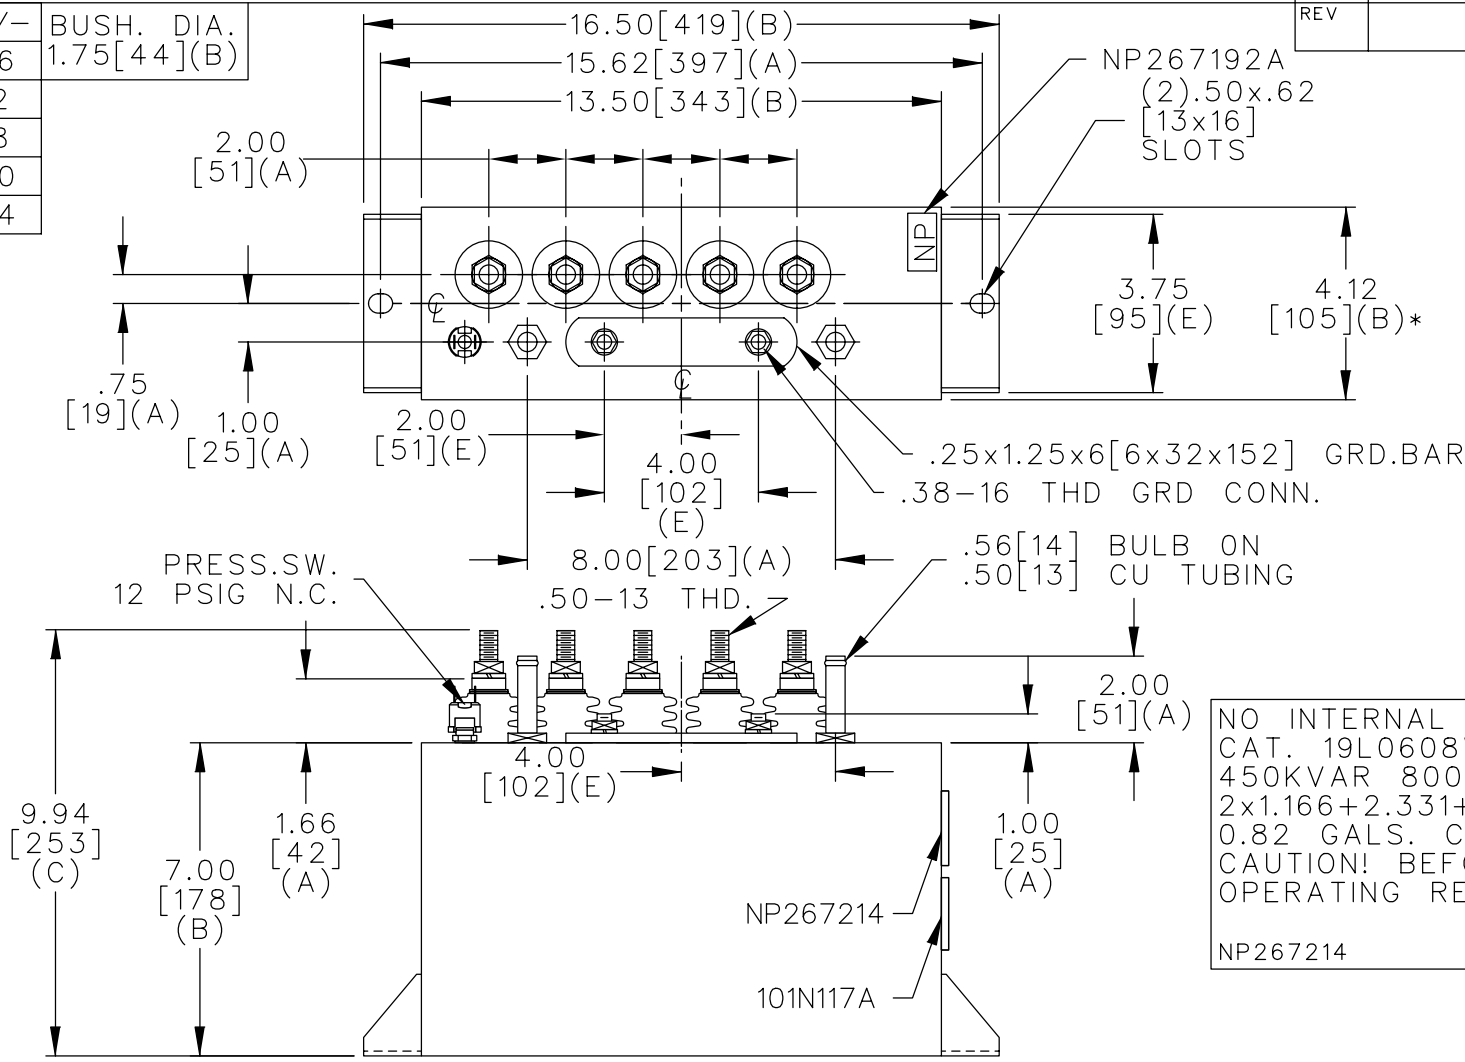

TERM	uF	kVAR
1	1.166	45
2	1.166	45
3	2.331	90
4	3.497	135
5	3.497	135

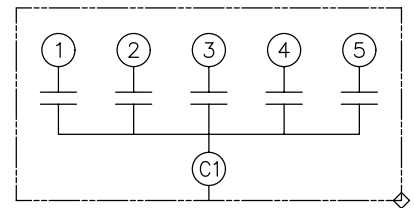

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0608WH4 SN
 450KVAR 800V 9600HZ 1PH
 2x1.166+2.331+2x3.497 UF/TAP
 0.82 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0608WH4
	DRAWN E.McGINN	FEB. 28, 2001	SCALE	
ISSUED	SHEET 2 CONT. ON -		DISTR TO	