



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

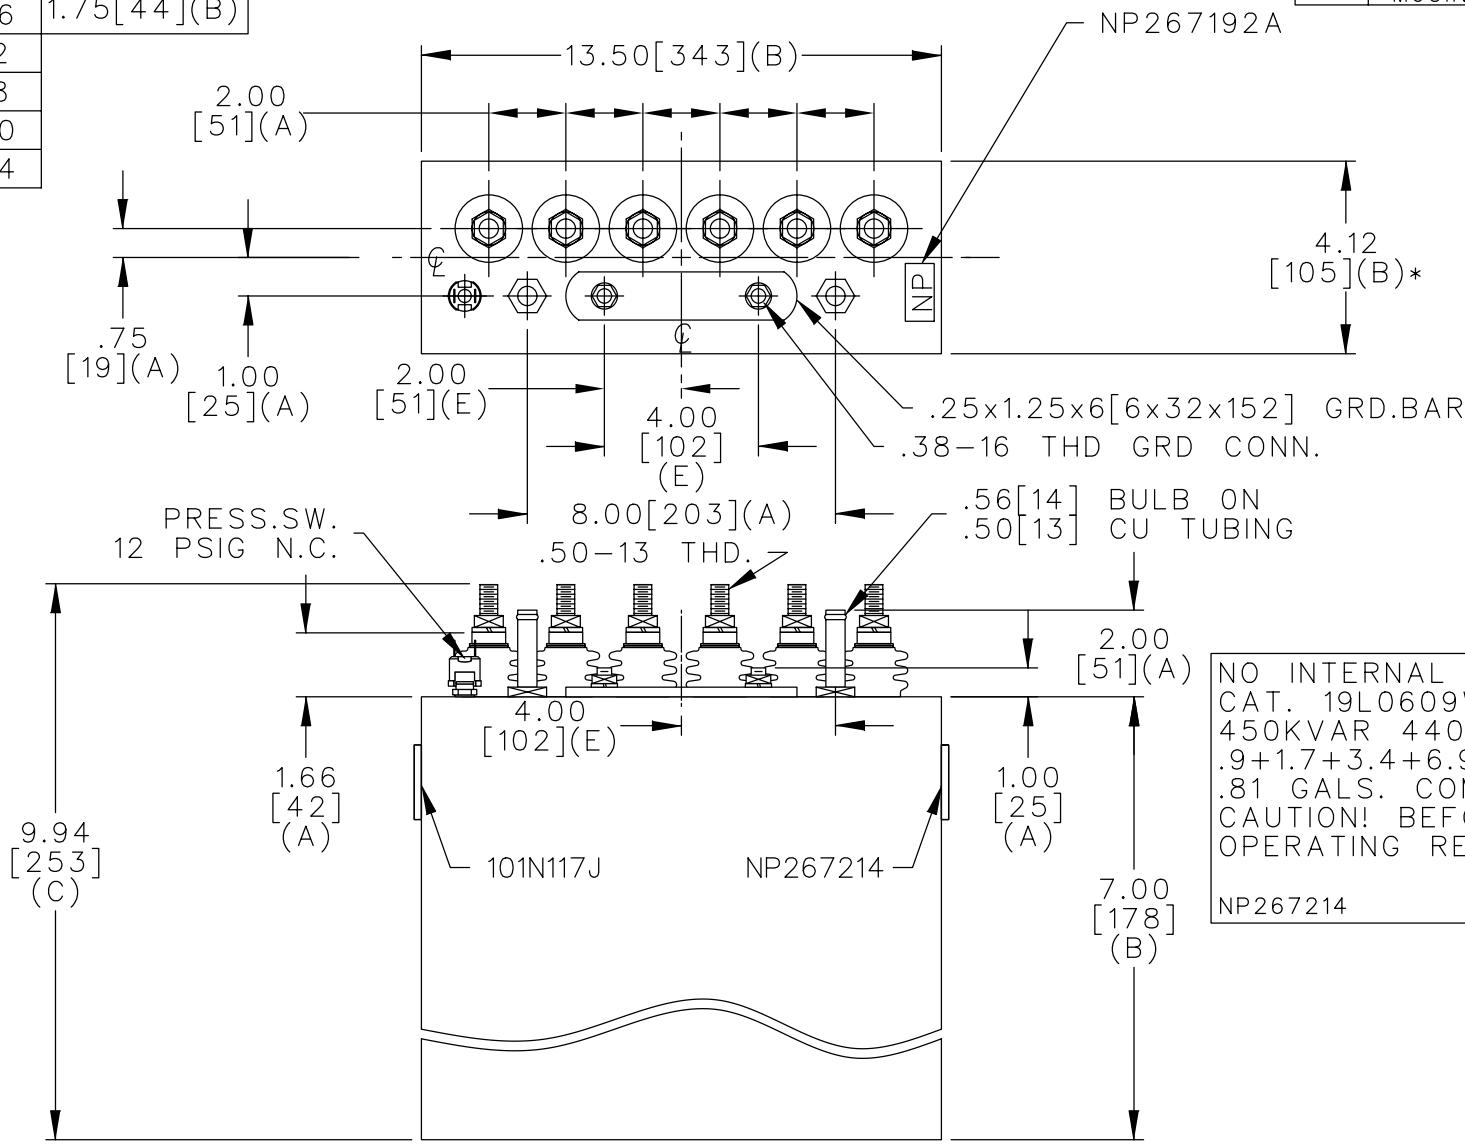

TERM	uF	kVAR
1	0.856	10
2	1.713	20
3	3.425	40
4	6.85	80
5	12.85	150
6	12.85	150

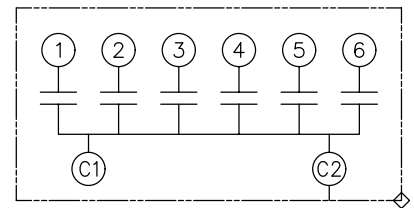

NO INTERNAL DISCH RESISTORS
 CAT. 19L0609WH2 SN
 450KVAR 440V 9600HZ 1PH
 .9+1.7+3.4+6.9+2x12.9 UF/TAP
 .81 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	FEB. 11, 1997
	ISSUED	2-12-97

SIZE A
SCALE

<h1>OUTLINE</h1> <h2>19L0609WH2</h2>
SHEET 2 CONT. ON -

DISTR TO