



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

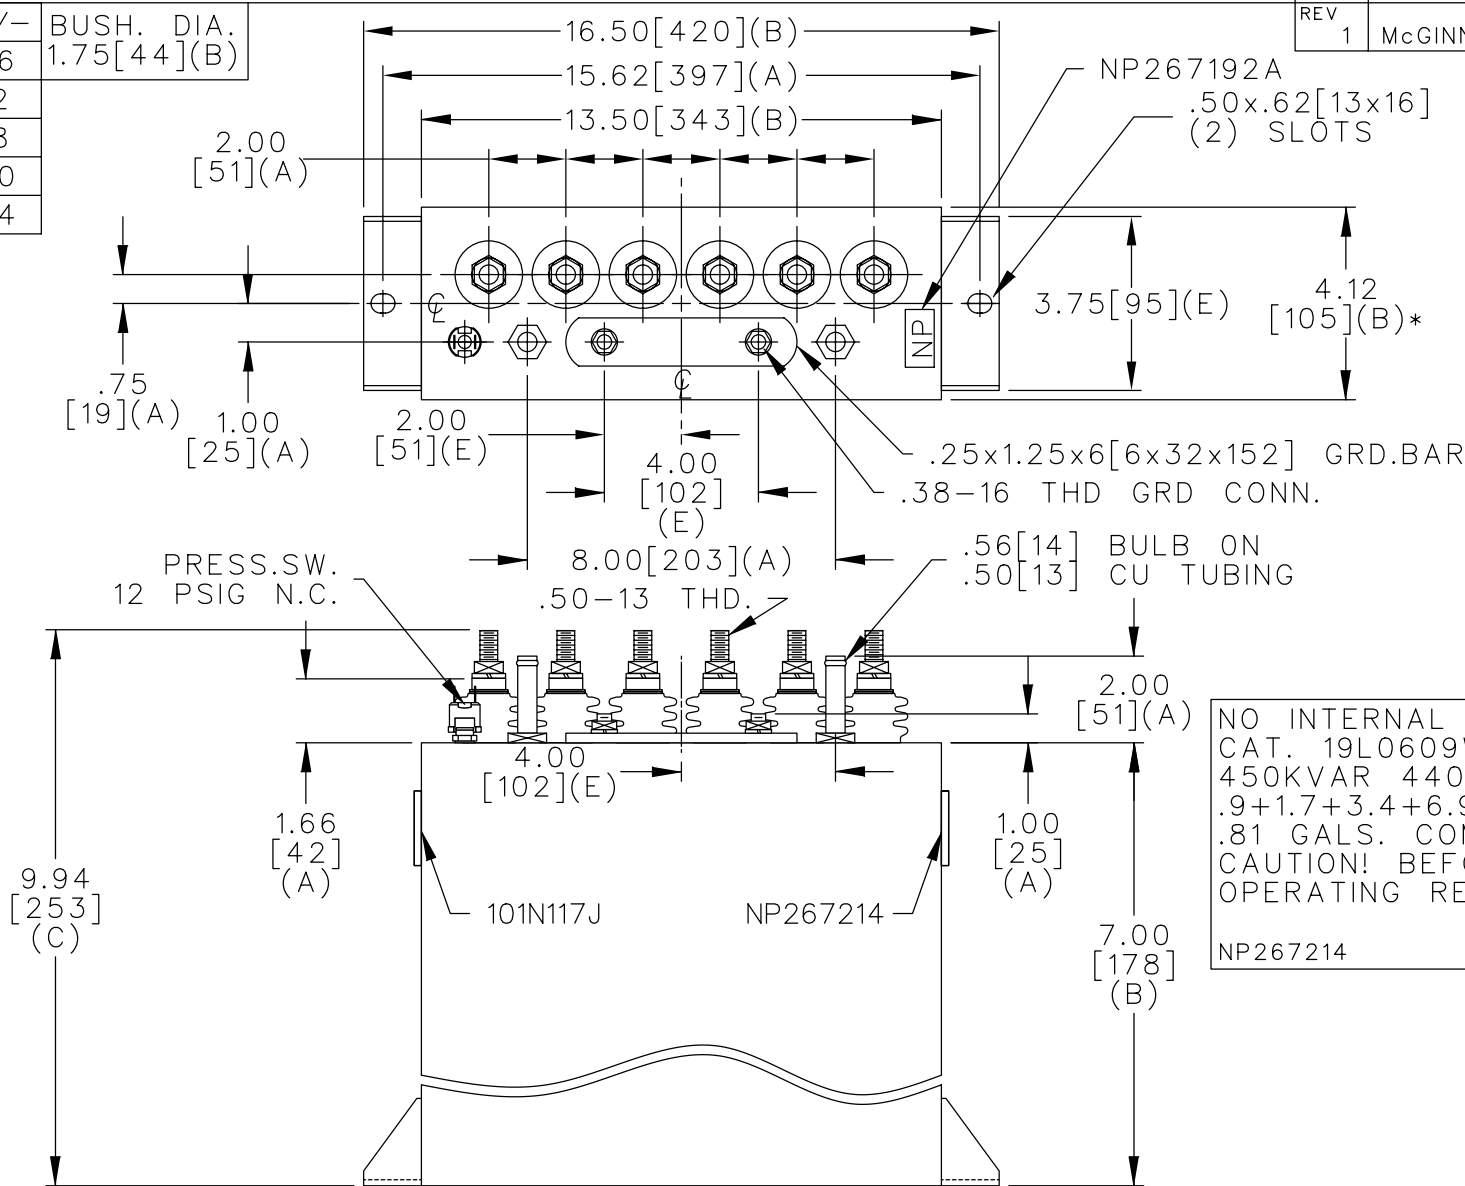

TERM	uF	kVAR
1	0.856	10
2	1.713	20
3	3.425	40
4	6.85	80
5	12.85	150
6	12.85	150

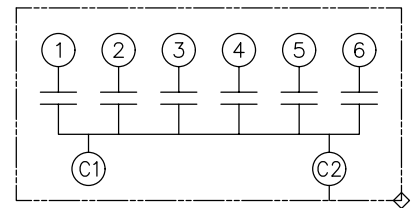

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0609WH4 SN  
 450KVAR 440V 9600HZ 1PH  
 .9+1.7+3.4+6.9+2x12.9 UF/TAP  
 .81 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0609WH4</b>	
	DRAWN E.McGINN	JULY 28, 1997	SCALE		
ISSUED	7-30-97	SHEET 2	CONT. ON -	DISTR TO	