



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

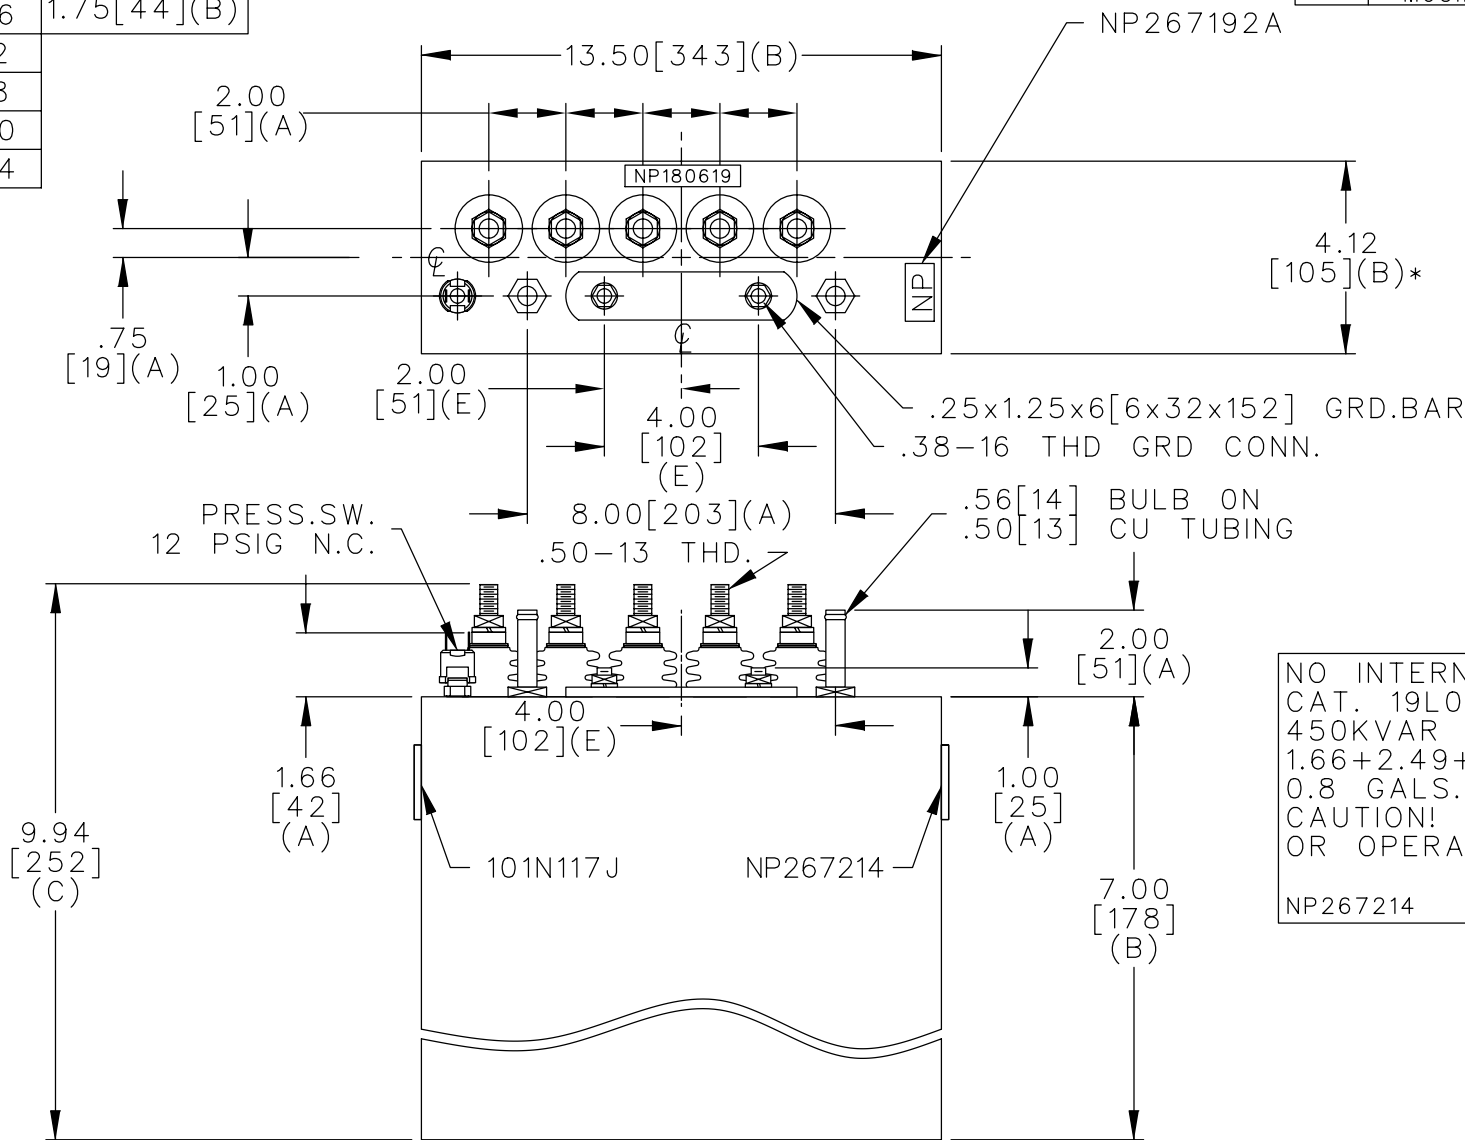

TERM	uF	kVAR
1	1.66	20
2	2.49	30
3	4.97	60
4	14.09	170
5	14.09	170

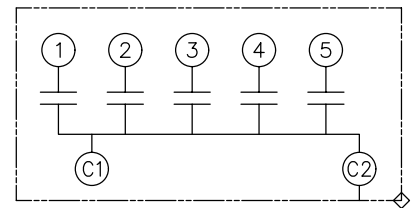

SCHEMATIC DIAGRAM - 506

NO INTERNAL DISCH RESISTORS
 CAT. 19L0610WH2 SN
 450KVAR 800V 3000HZ 1PH
 1.66+2.49+4.97+2x14.09 UF/TAP
 0.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0610WH2</h2>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	APR. 30, 1997	SCALE		
ISSUED	4-30-97	DISTR TO			