



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

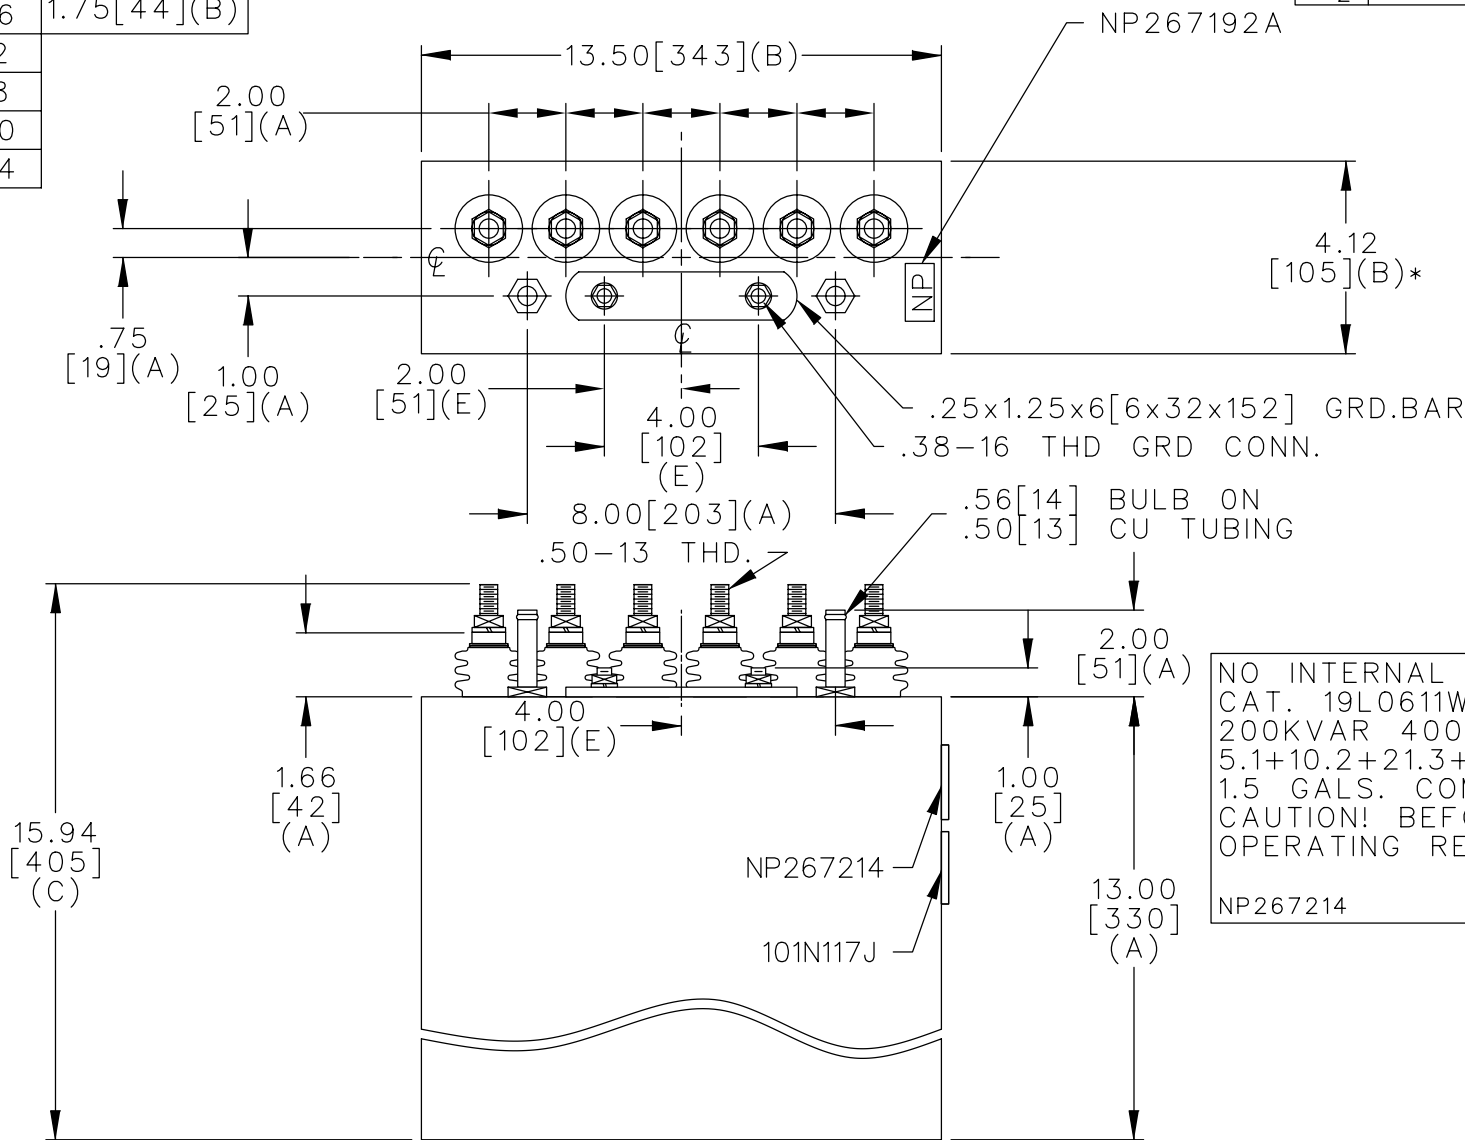

TERM	uF	kVAR
1	5.08	4.9
2	10.15	9.8
3	21.3	20.6
4	42.67	41.1
5	64	61.8
6	64	61.8

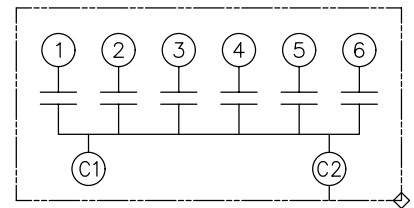

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0611WH1 SN
 200KVAR 400V 960HZ 1PH
 5.1+10.2+21.3+42.7+2x64UF/TAP
 1.5 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0611WH1	SHEET 2	CONT. ON -
	DRAWN E.McGINN	NOV. 18, 1996				
ISSUED 11-20-96						

DISTR TO