



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

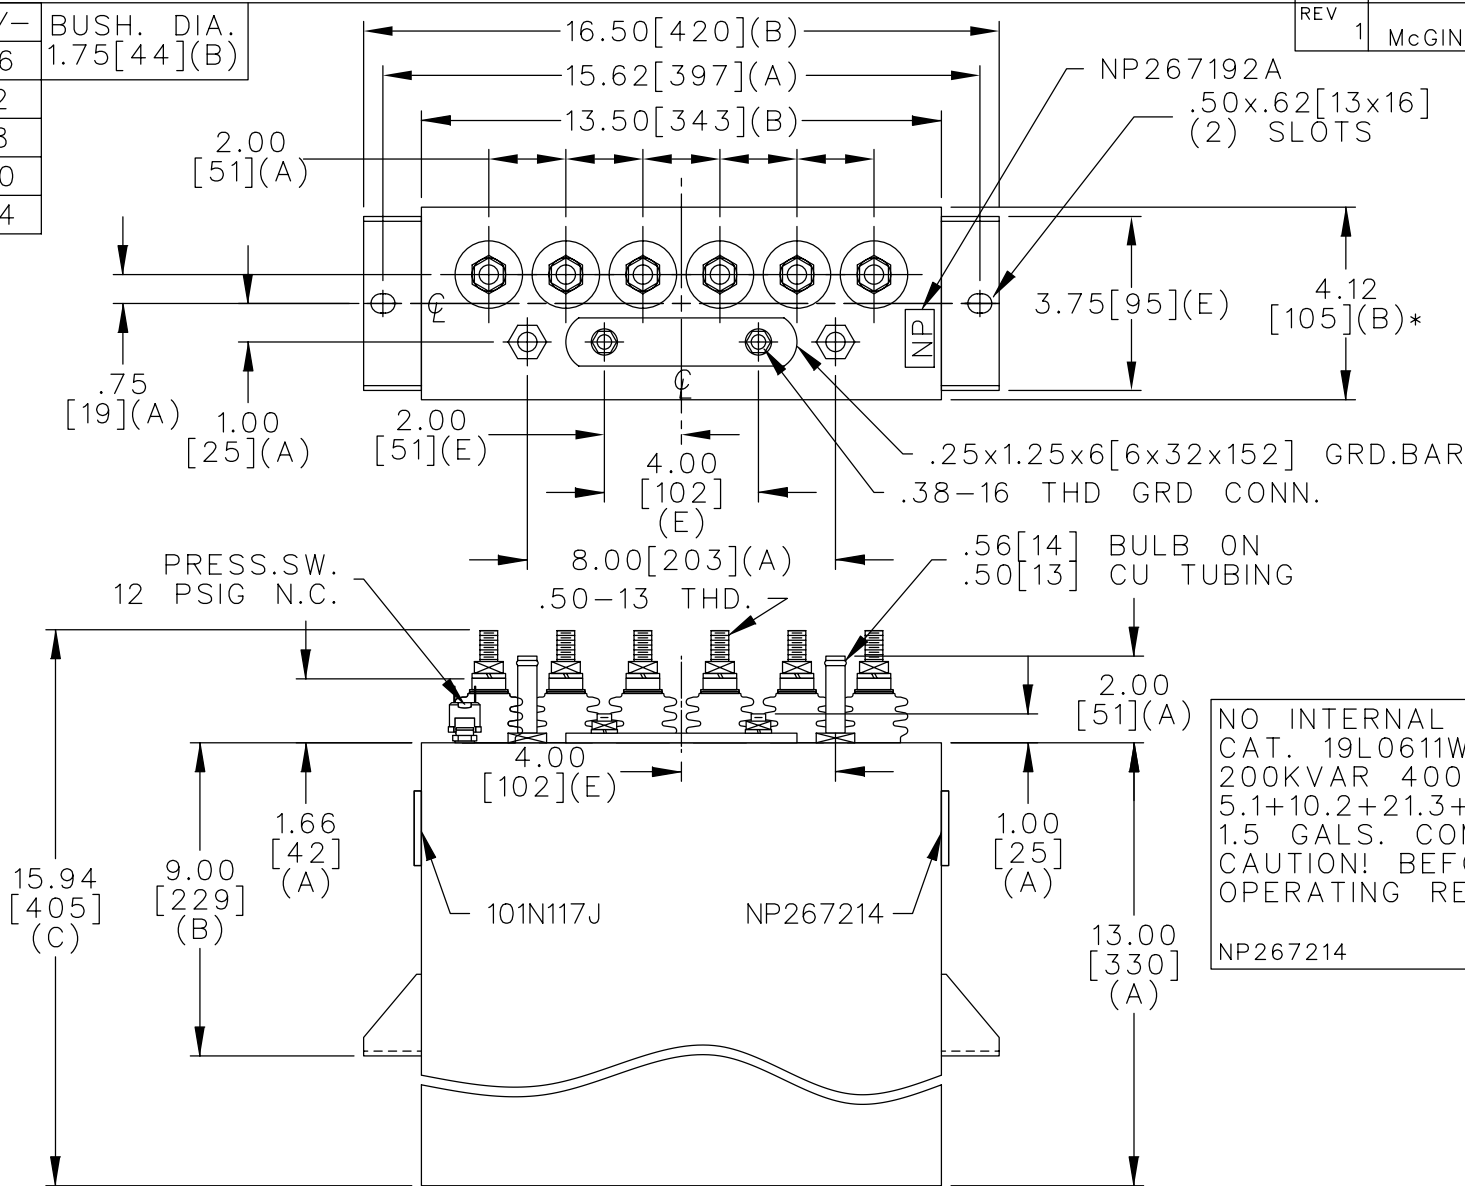

TERM	uF	kVAR
1	5.08	4.9
2	10.15	9.8
3	21.3	20.6
4	42.67	41.1
5	64	61.8
6	64	61.8

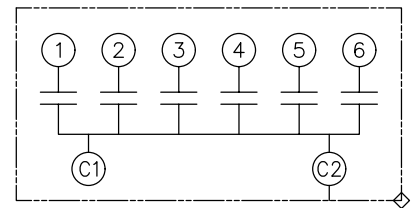

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0611WH4 SN  
 200KVAR 400V 960HZ 1PH  
 5.1+10.2+21.3+42.7+2x64UF/TAP  
 1.5 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L0611WH4</h2>		SHEET 2 CONT. ON -
	DRAWN E.McGINN	FEB. 6, 1998	SCALE			
ISSUED	2-11-98					

DISTR TO