



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

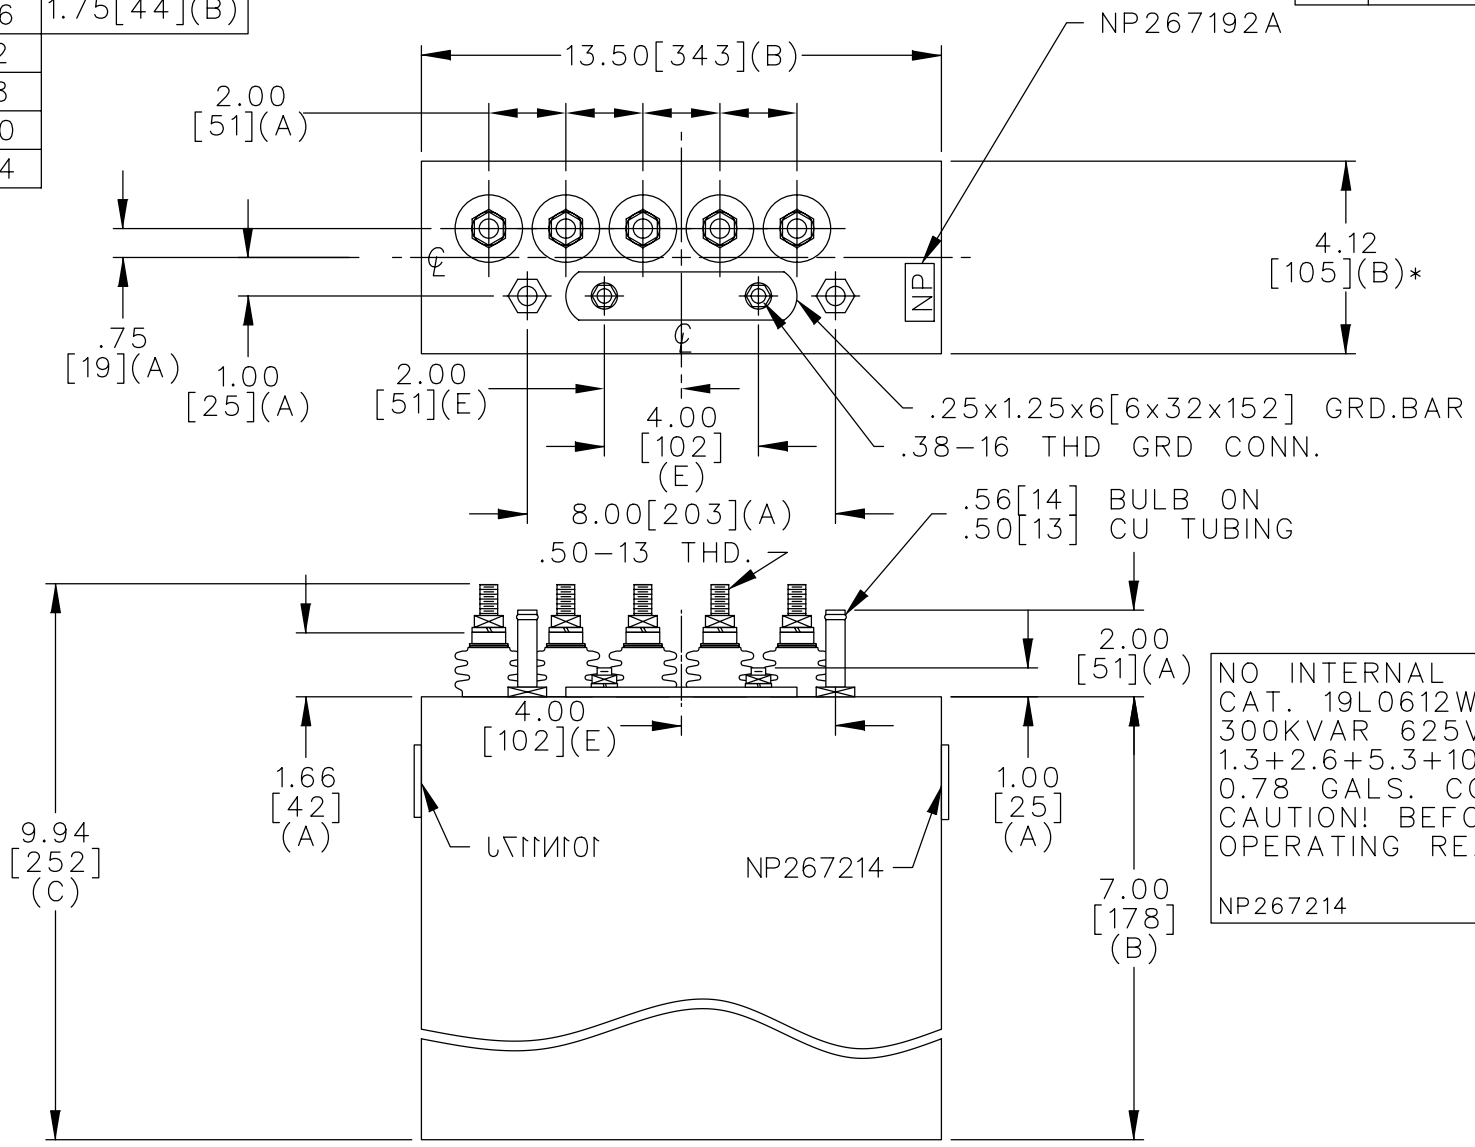

TERM	uF	kVAR
1	1.3	9.6
2	2.63	19.36
3	5.26	38.72
4	10.52	77.44
5	21	154.9

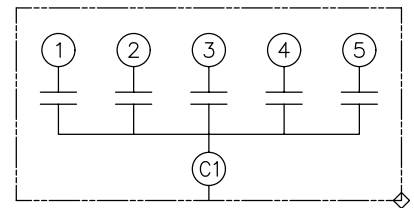

NO INTERNAL DISCH RESISTORS
 CAT. 19L0612WH1 SN
 300KVAR 625V 3000HZ 1PH
 1.3+2.6+5.3+10.5+21UF/TAP
 0.78 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0612WH1</h2>		SHEET 2 CONT. ON -	DISTR TO
	DRAWN E.McGINN	JAN. 28, 1998	SCALE				
ISSUED							