

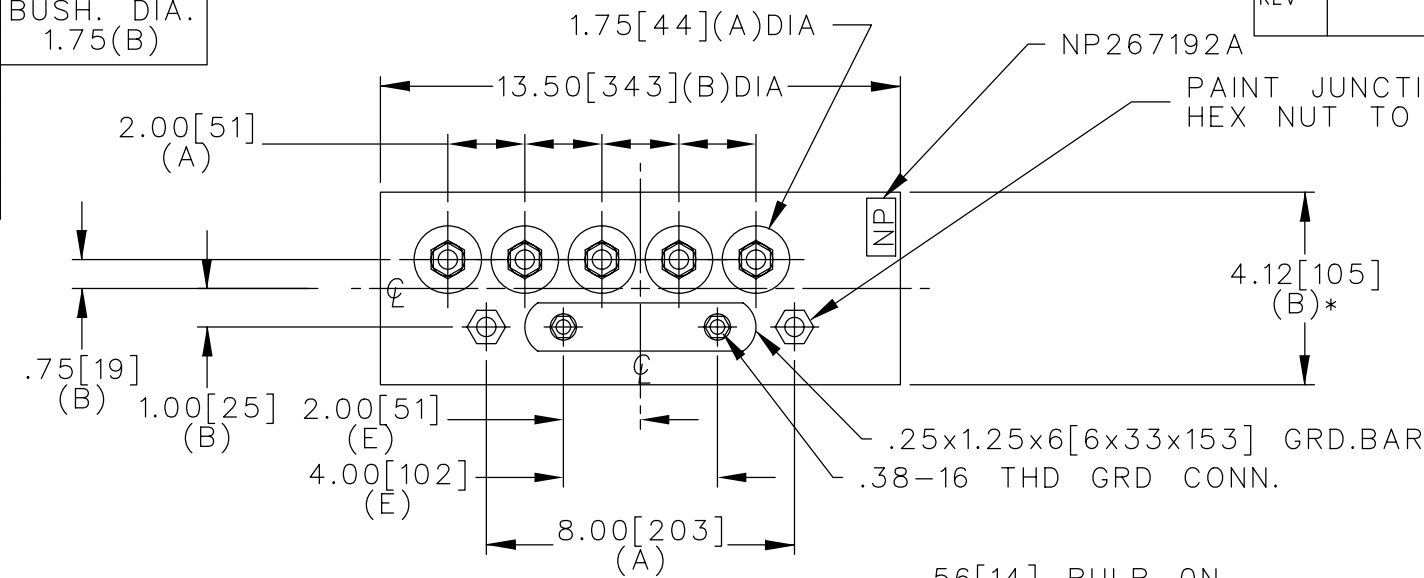


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH. DIA.
1.75(B)

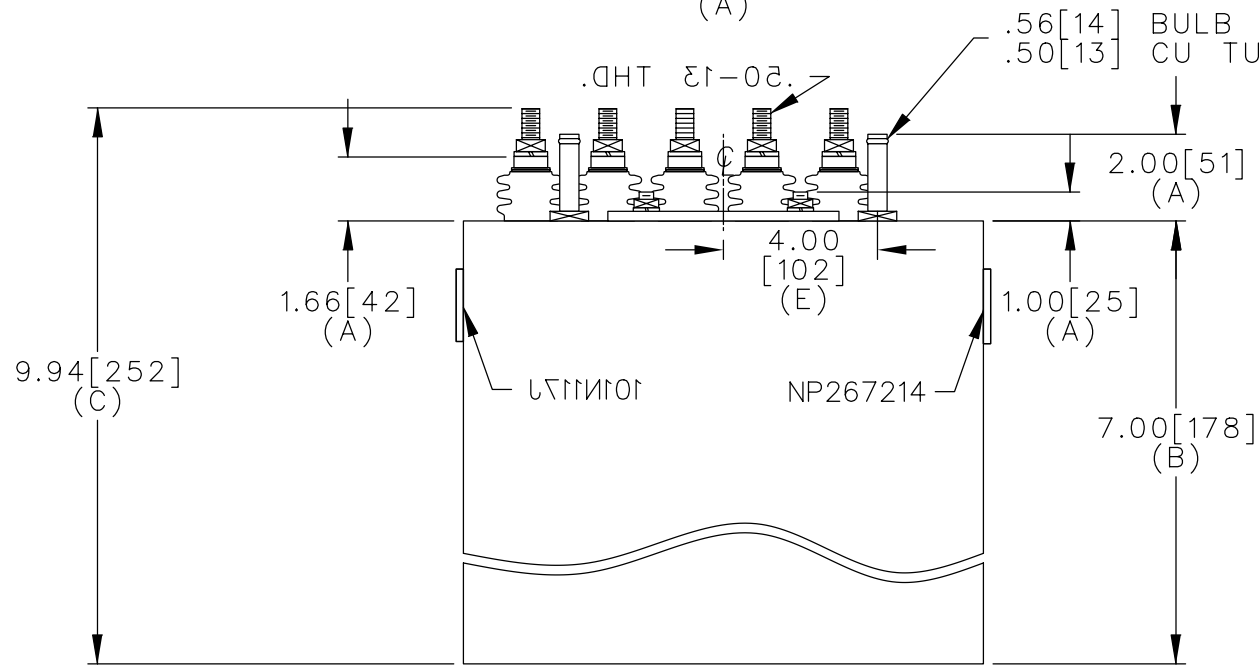

TERM	uF	kVAR
1	1.1	3.2
2	2.2	6.4
3	4.4	12.8
4	8.9	25.9
5	17.8	51.8

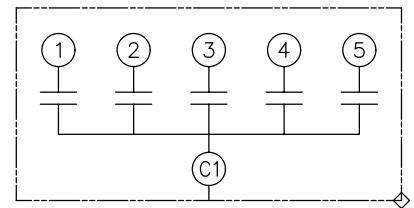

NO INTERNAL DISCH RESISTORS
CAT. 19L0619WH1 SN
100KVAR 220V 9600HZ 1PH
1.1+2.2+4.4+8.9+17.8 UF/TAP
0.78 GALS COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING
OR OPERATING READ GEH-2733
NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0619WH1	
	DRAWNTMO	MAR 13, 1997	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO