




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

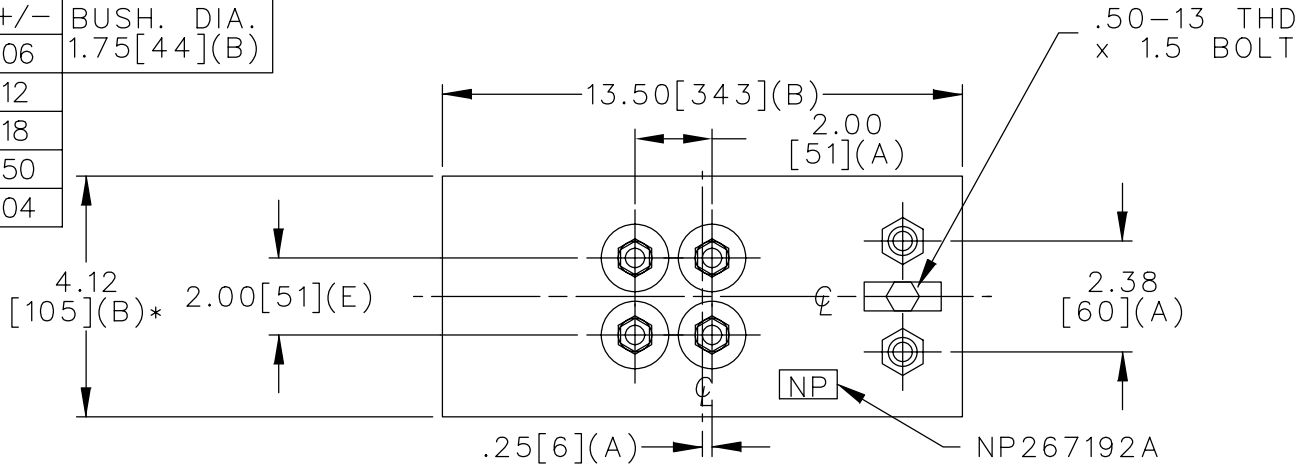

TERM	uF	kVAR
1	52.61	75
2	52.61	75
3	52.61	75
4	52.61	75

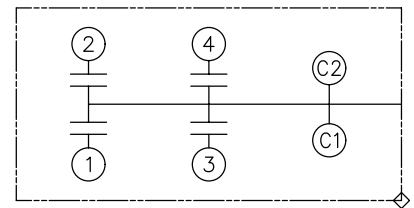

SCHEMATIC DIAGRAM - 421

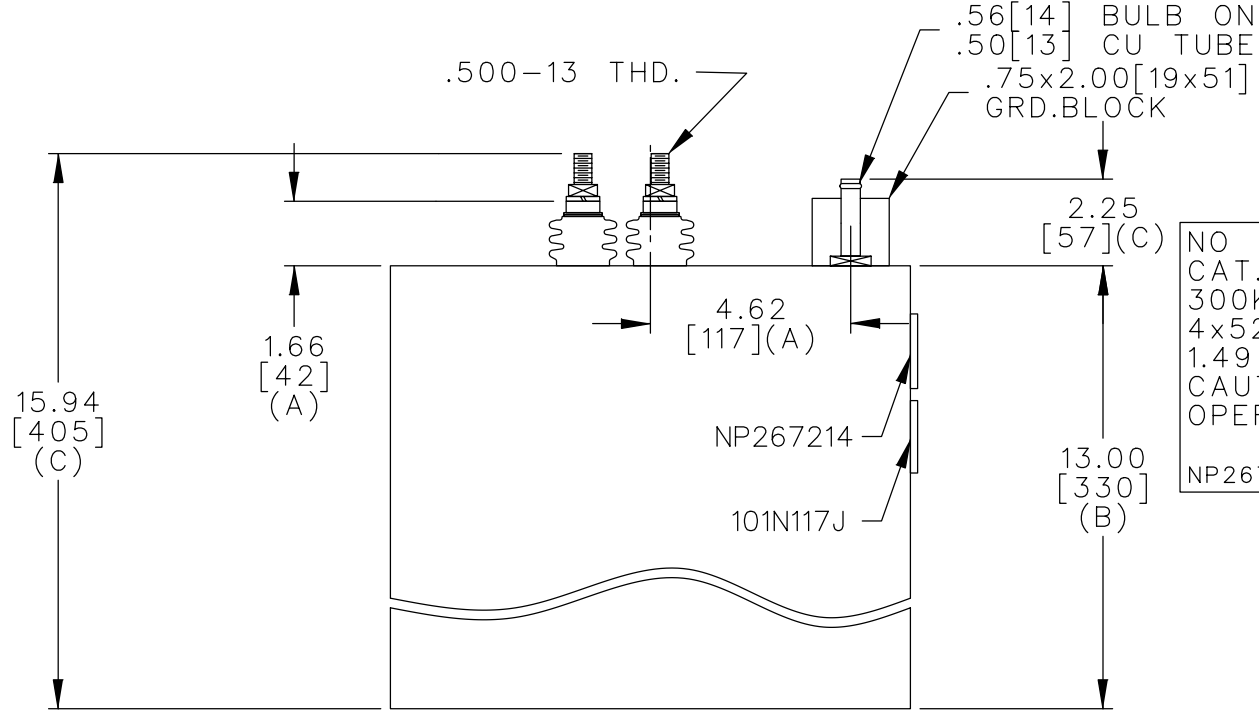

NO INTERNAL DISCH RESISTORS
 CAT. 19L0620WH1 SN
 300KVAR 275V 3000HZ 1PH
 4x52.61 UF/TAP
 1.49 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0620WH1	
	DRAWN E.McGINN	NOV. 20, 1996	SCALE		
ISSUED	12-4-96		SHEET 2	CONT. ON -	DISTR TO