

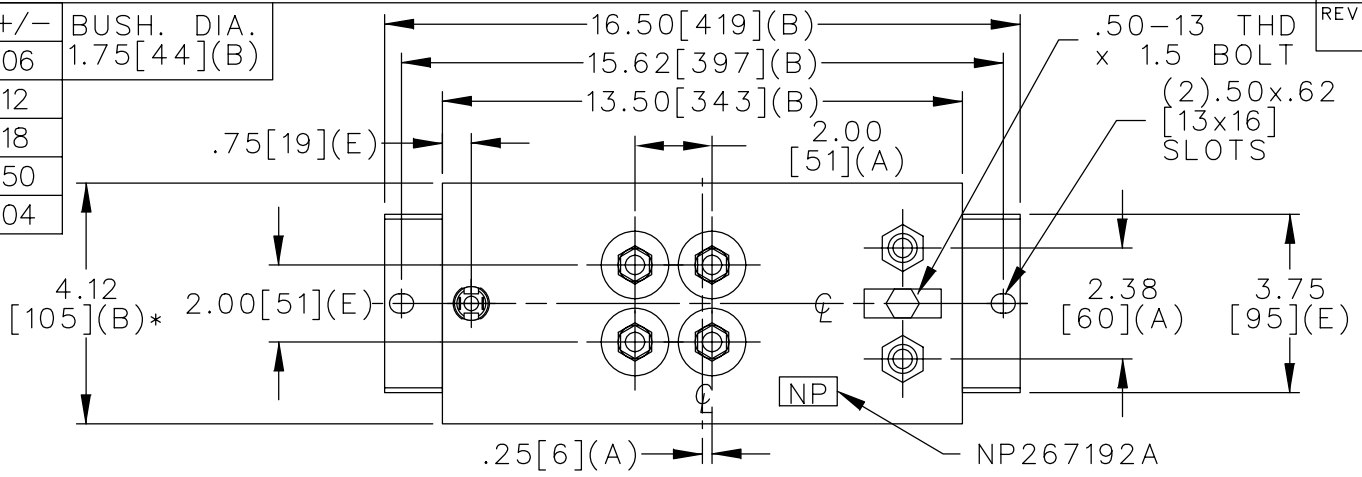


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

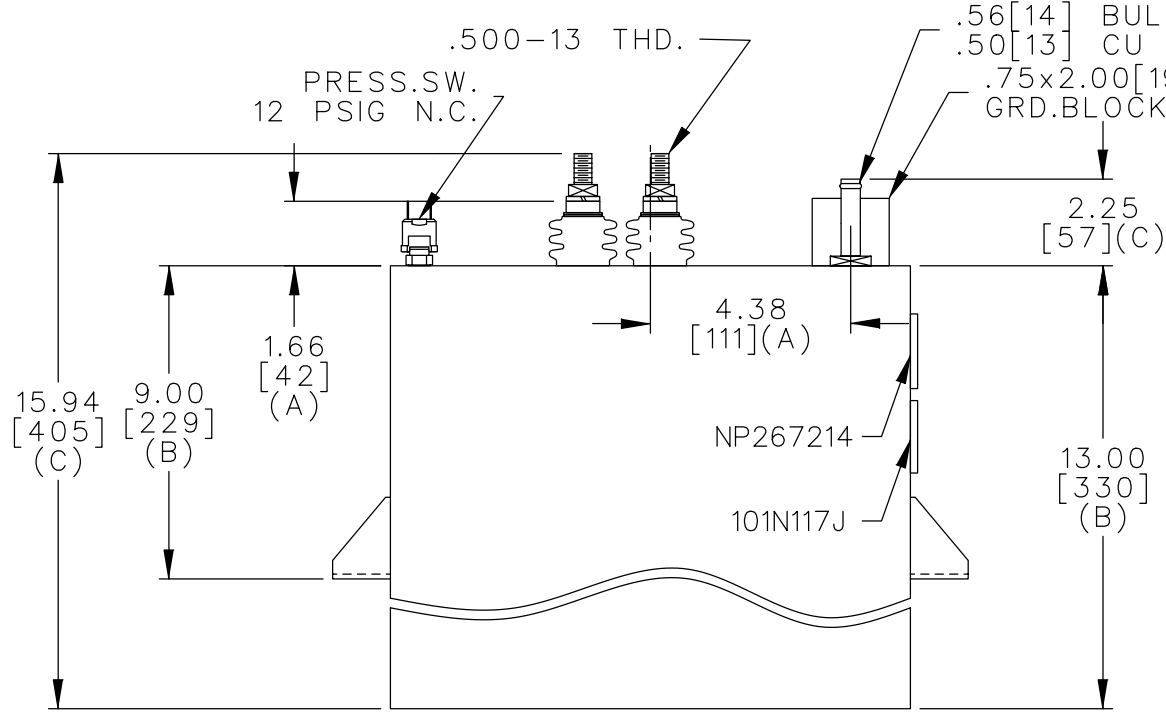

TERM	uF	kVAR
1	52.61	75
2	52.61	75
3	52.61	75
4	52.61	75

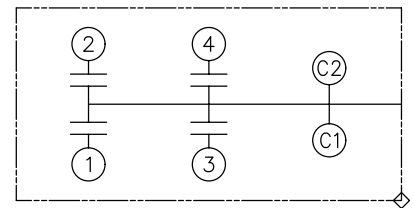

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0620WH4 SN  
 300KVAR 275V 3000HZ 1PH  
 4x52.61 UF/TAP  
 1.49 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR &amp; POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE	<p>A</p>	<p>OUTLINE 19L0620WH4</p>
	<p>DRAWN E.McGINN OCT. 19, 2000</p>		
<p>ISSUED</p>	<p>SHEET 2 CONT. ON -</p>	<p>DISTR TO</p>	