

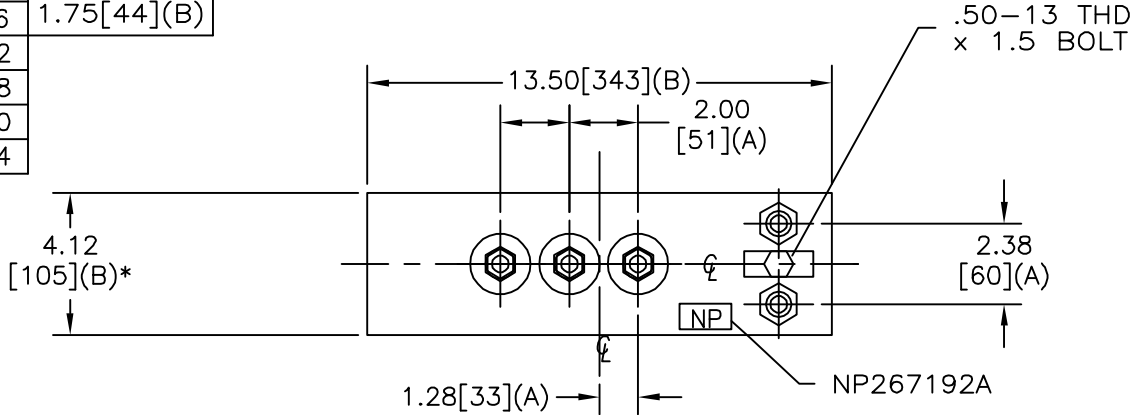


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE	DWG NO	SHT	REV
A	19L0627WH1	2	2
REV	DESCRIPTION	DATE	APPROVED
2	CHG NP CAT	4/28/04	BTR

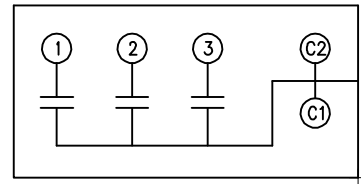

TERM	uF	kVAR
1	1.27	37.5
2	1.27	37.5
3	2.55	75.0

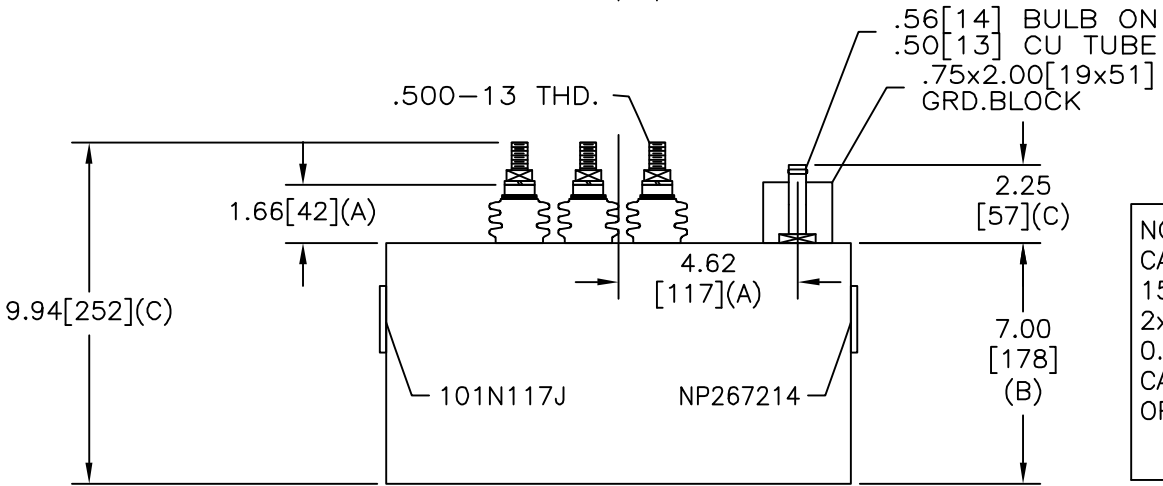

SCHEMATIC DIAGRAM - 326

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0627WH1 SN  
 150KVAR 1250V 3000HZ 1PH  
 2x1.27+2.55 UF/TAP  
 0.86 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<b>INDUSTRIAL SYSTEMS</b> FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>
DRAWN	E. McGinn	DATE DEC. 10, 1996
ISSUED		DATE 12-11-96

<h1>OUTLINE</h1> <h2>19L0627WH1</h2>		SHEET 2	CONT ON -
--------------------------------------	--	------------	--------------

DISTR. TO