

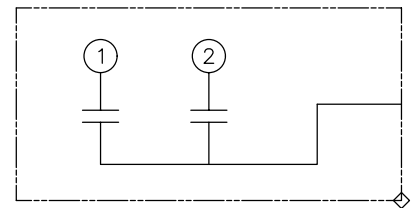


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

TERM	uF	kVAR
1 TO 2	10.2	300

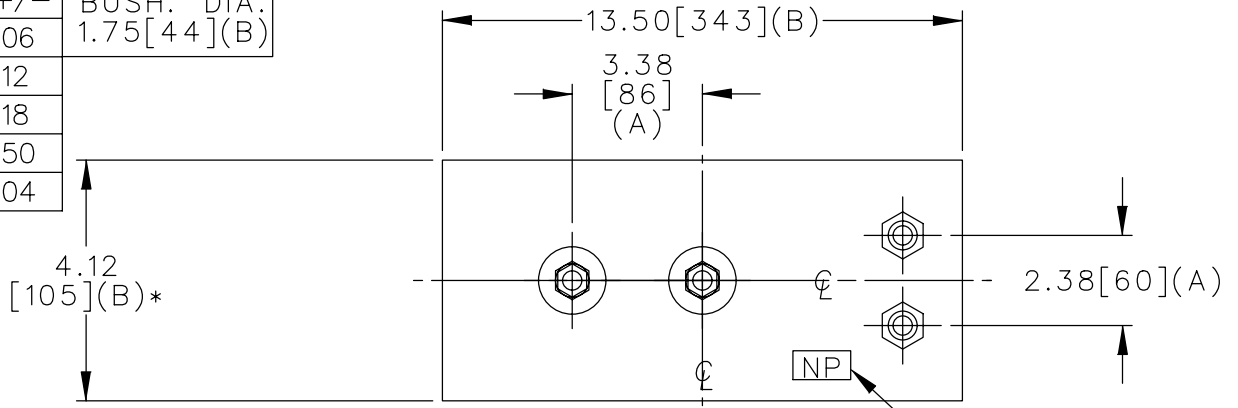

SCHEMATIC DIAGRAM - 221

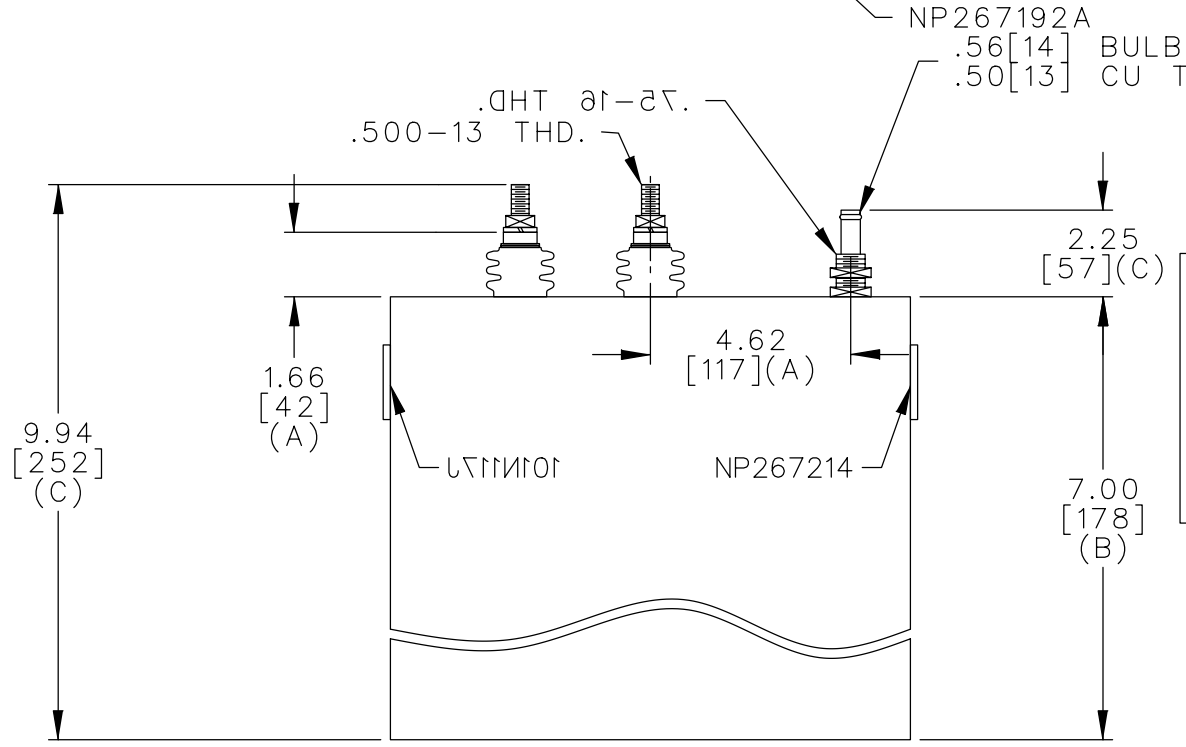

NO INTERNAL DISCH RESISTORS
 CAT. 19L0628WH1 SN
 300KVAR 1250V 3000HZ 1PH
 10.2UF BETWEEN TERMS
 .87 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0628WH1		SHEET 2	CONT. ON -
	DRAWN E.McGINN	DEC. 10, 1996	SCALE				
ISSUED	12-11-96		SCALE	SHEET 2		CONT. ON -	DISTR TO