



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

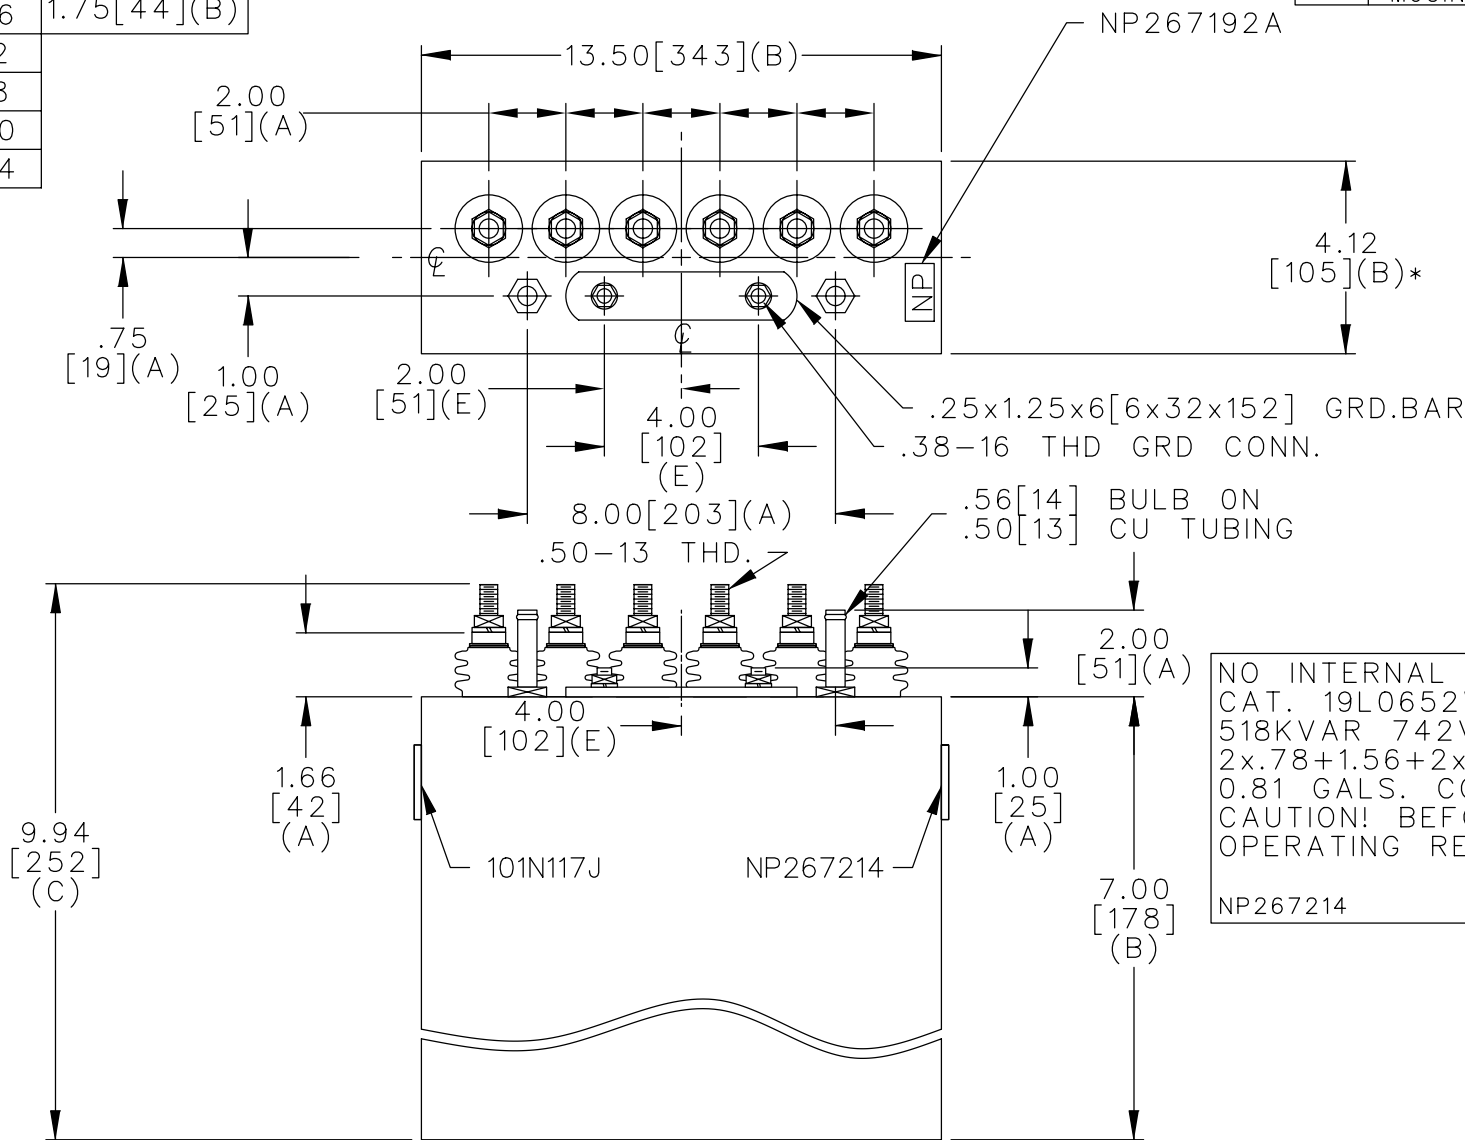

TERM	uF	kVAR
1	0.78	26
2	0.78	26
3	1.56	52
4	3.12	104
5	3.12	104
6	6.24	207

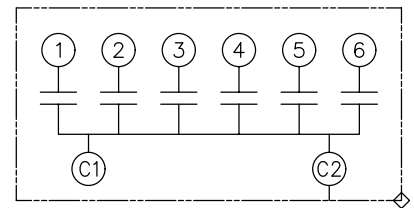

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0652WH1 SN
 518KVAR 742V 9600HZ 1PH
 2x.78+1.56+2x3.12+6.24 UF/TAP
 0.81 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0652WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 24, 1997	SCALE		
ISSUED	1-30-97	DISTR TO			