



TOL	+/-	BUSH. DIA.
A	.06	1.75[45](B)
B	.12	
C	.18	
D	.50	
E	.04	

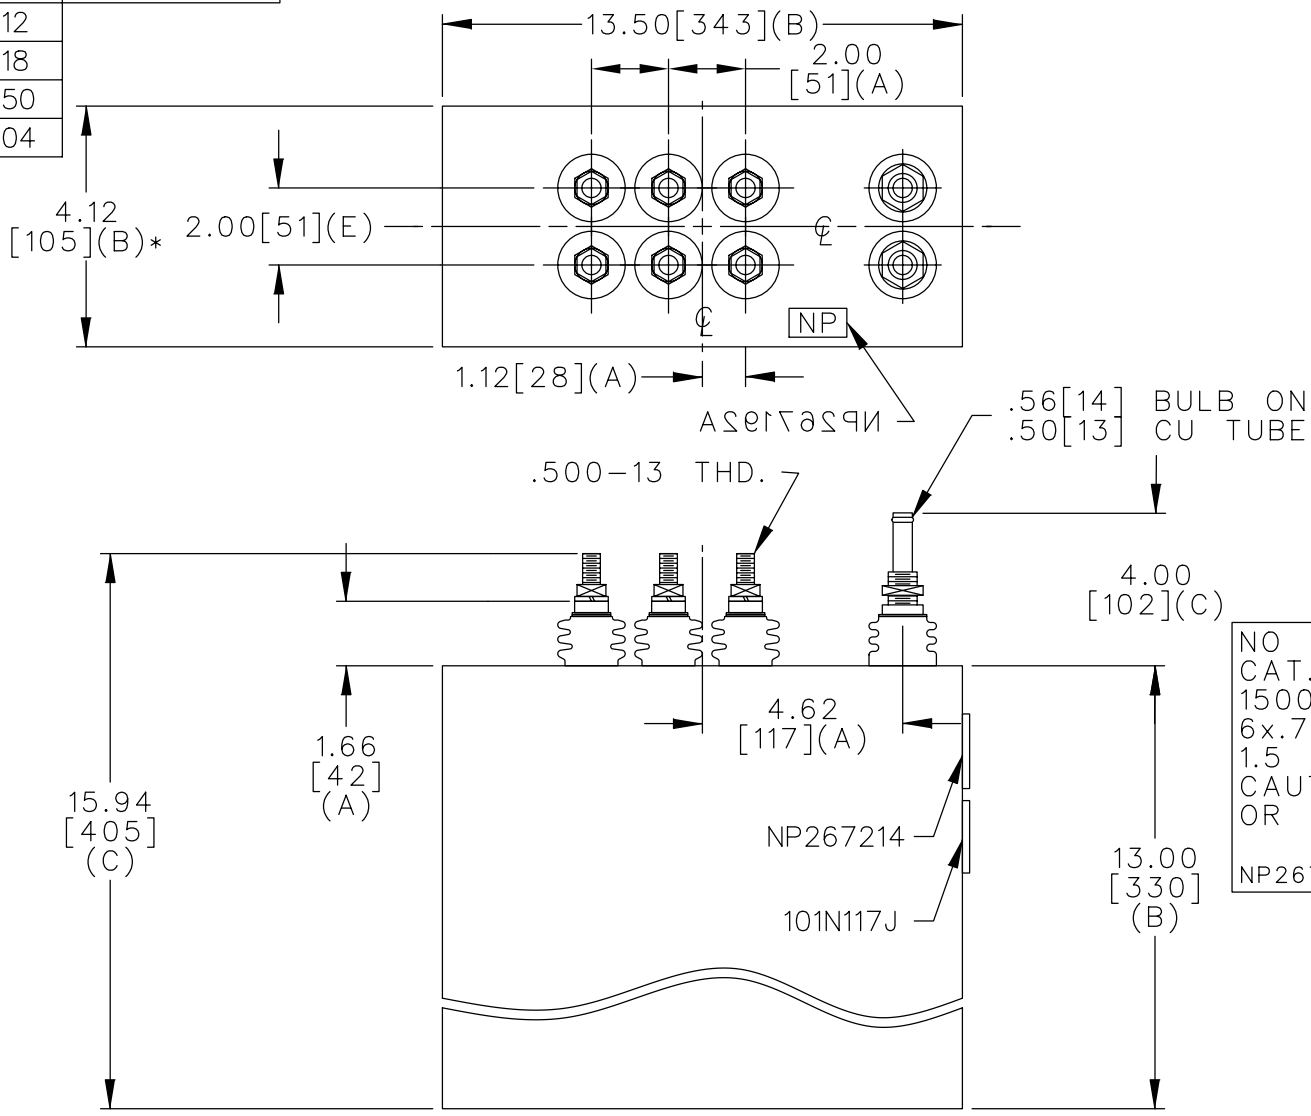

TERM	uF	kVAR
1	.737	250
2	.737	250
3	.737	250
4	.737	250
5	.737	250
6	.737	250

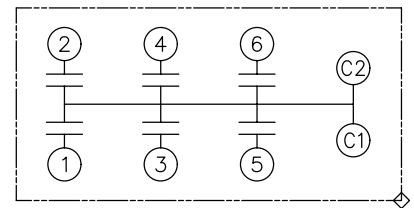

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT. 19L0655WH1 SN
 1500KVAR 3000V 6000HZ 1PH
 6x.737uF
 1.5 GALS COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	MAR. 15, 2000
	ISSUED	SCALE

SIZE A
SCALE

OUTLINE 19L0655WH1	
SHEET 2	CONT. ON -

DISTR TO