



TOL	+/-	BUSH. DIA.
A	.06	1.75[45](B)
B	.12	
C	.18	
D	.50	
E	.04	

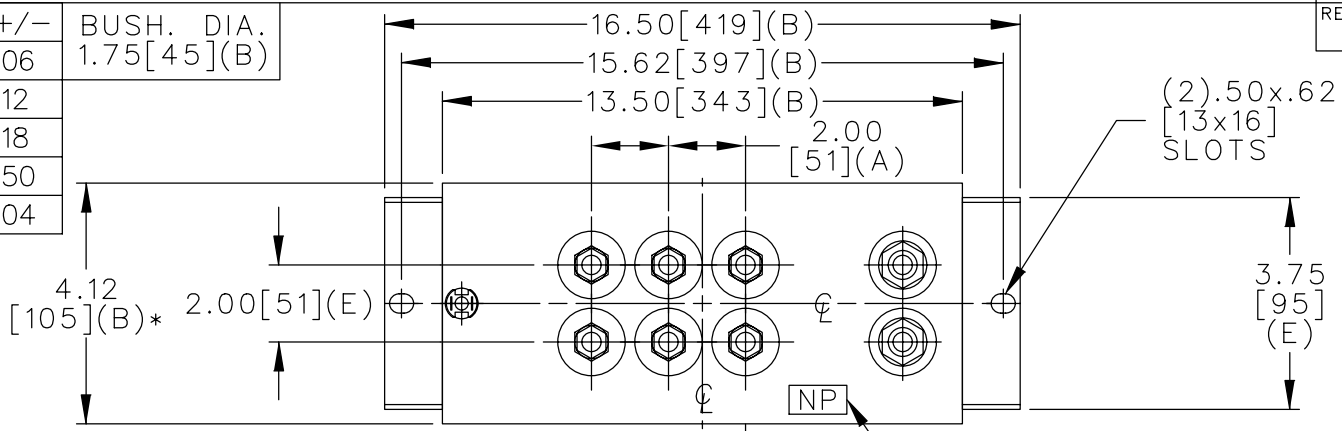

TERM	uF	kVAR
1	.737	250
2	.737	250
3	.737	250
4	.737	250
5	.737	250
6	.737	250

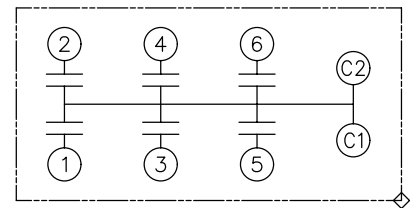


SCHEMATIC DIAGRAM - 615

PRESS.SW.
12 PSIG N.C.

.500-13 THD.

.56 [14] BULB ON
.50 [13] CU TUBE

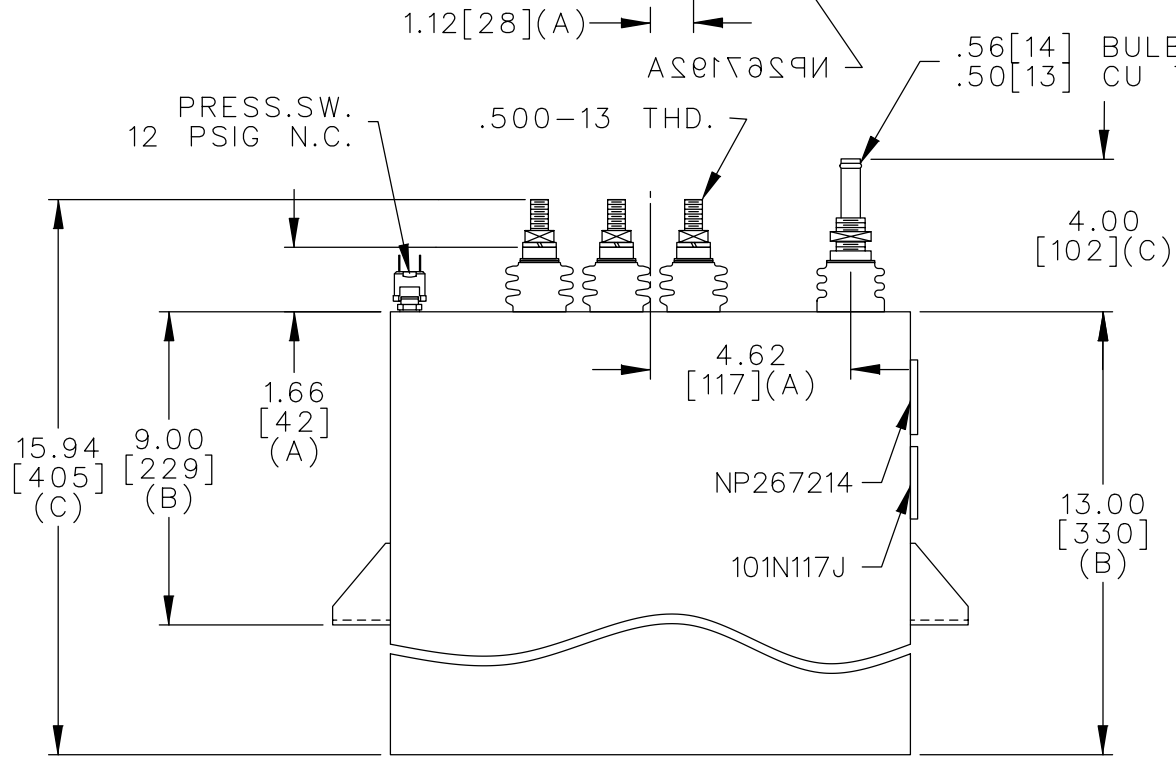

NO INTERNAL DISCH RESISTORS
CAT. 19L0655WH4 SN
1500KVAR 3000V 6000HZ 1PH
6x.737uF
1.5 GALS COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING
OR OPERATING READ GEH-2733
NP267214

* UP TO +.50 [13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0655WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAR. 15, 2000	SCALE		
ISSUED					

DISTR TO