

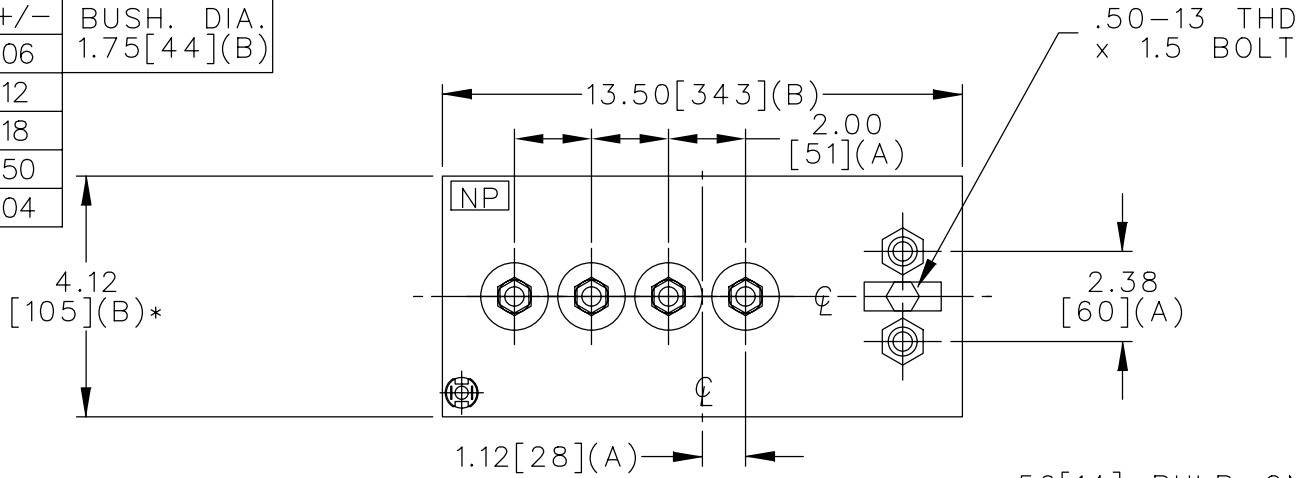


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

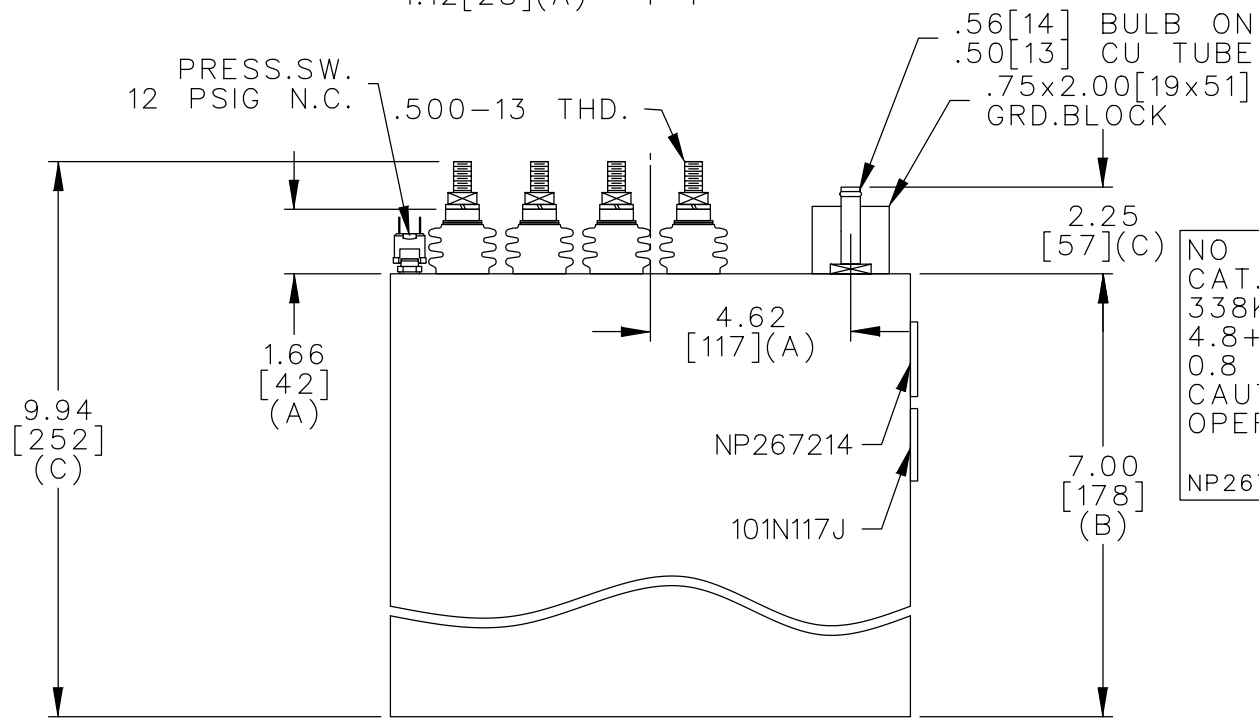

TERM	uF	kVAR
1	4.8	22.5
2	9.6	45.1
3	19.1	90.1
4	38.3	180.3

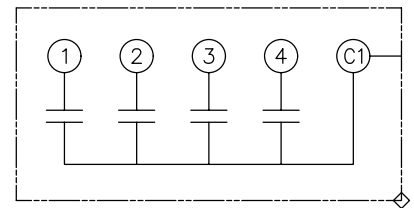

NO INTERNAL DISCH RESISTORS
 CAT. 19L0658WH2 SN
 338KVAR 500V 3000HZ 1PH
 4.8+9.6+19.1+38.3 UF/TAP
 0.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0658WH2</h2>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	OCT. 11, 1996	SCALE				
ISSUED							