



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

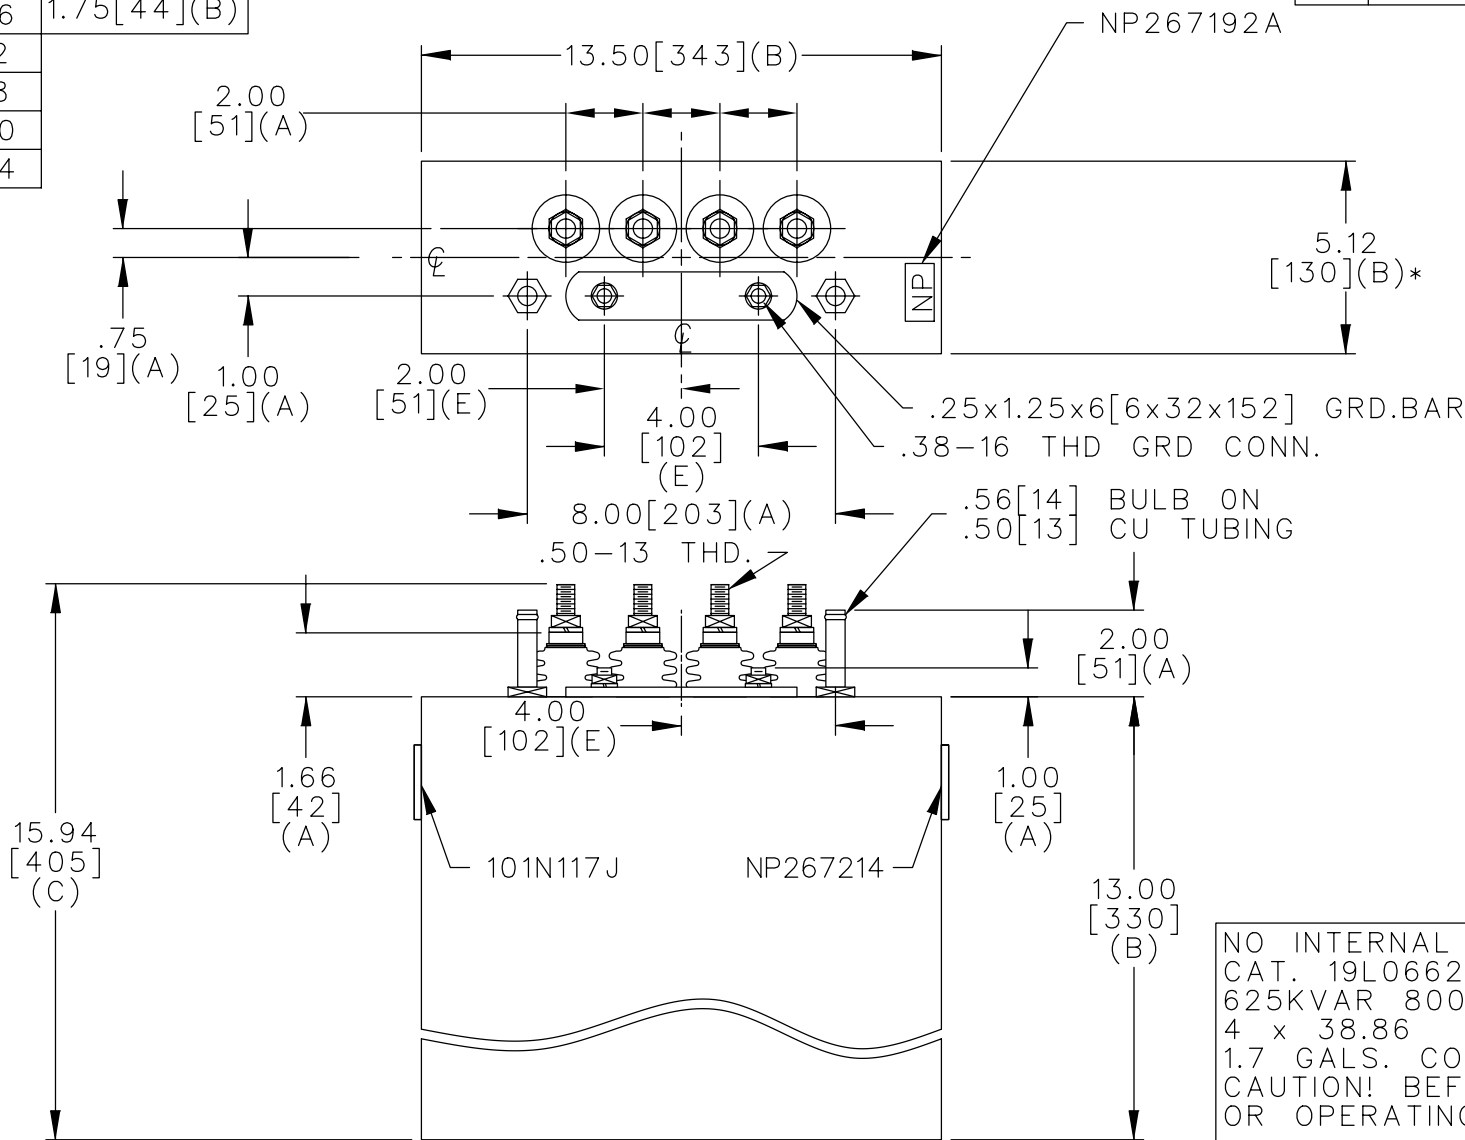

TERM	uF	kVAR
1	38.86	156.2
2	38.86	156.2
3	38.86	156.2
4	38.86	156.2

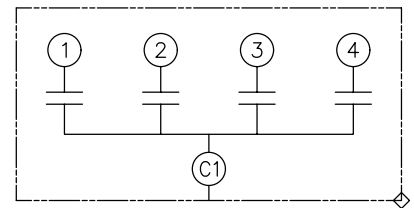

SCHEMATIC DIAGRAM - 416

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0662WH1 SN  
 625KVAR 800VOLTS 1000HZ 1PH  
 4 x 38.86 uF  
 1.7 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2736  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	MAY 10, 1999
	ISSUED	5-12-99

SIZE <b>A</b>
SCALE

<h1>OUTLINE</h1> <h2>19L0662WH1</h2>
SHEET 2 CONT. ON

DISTR TO