



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

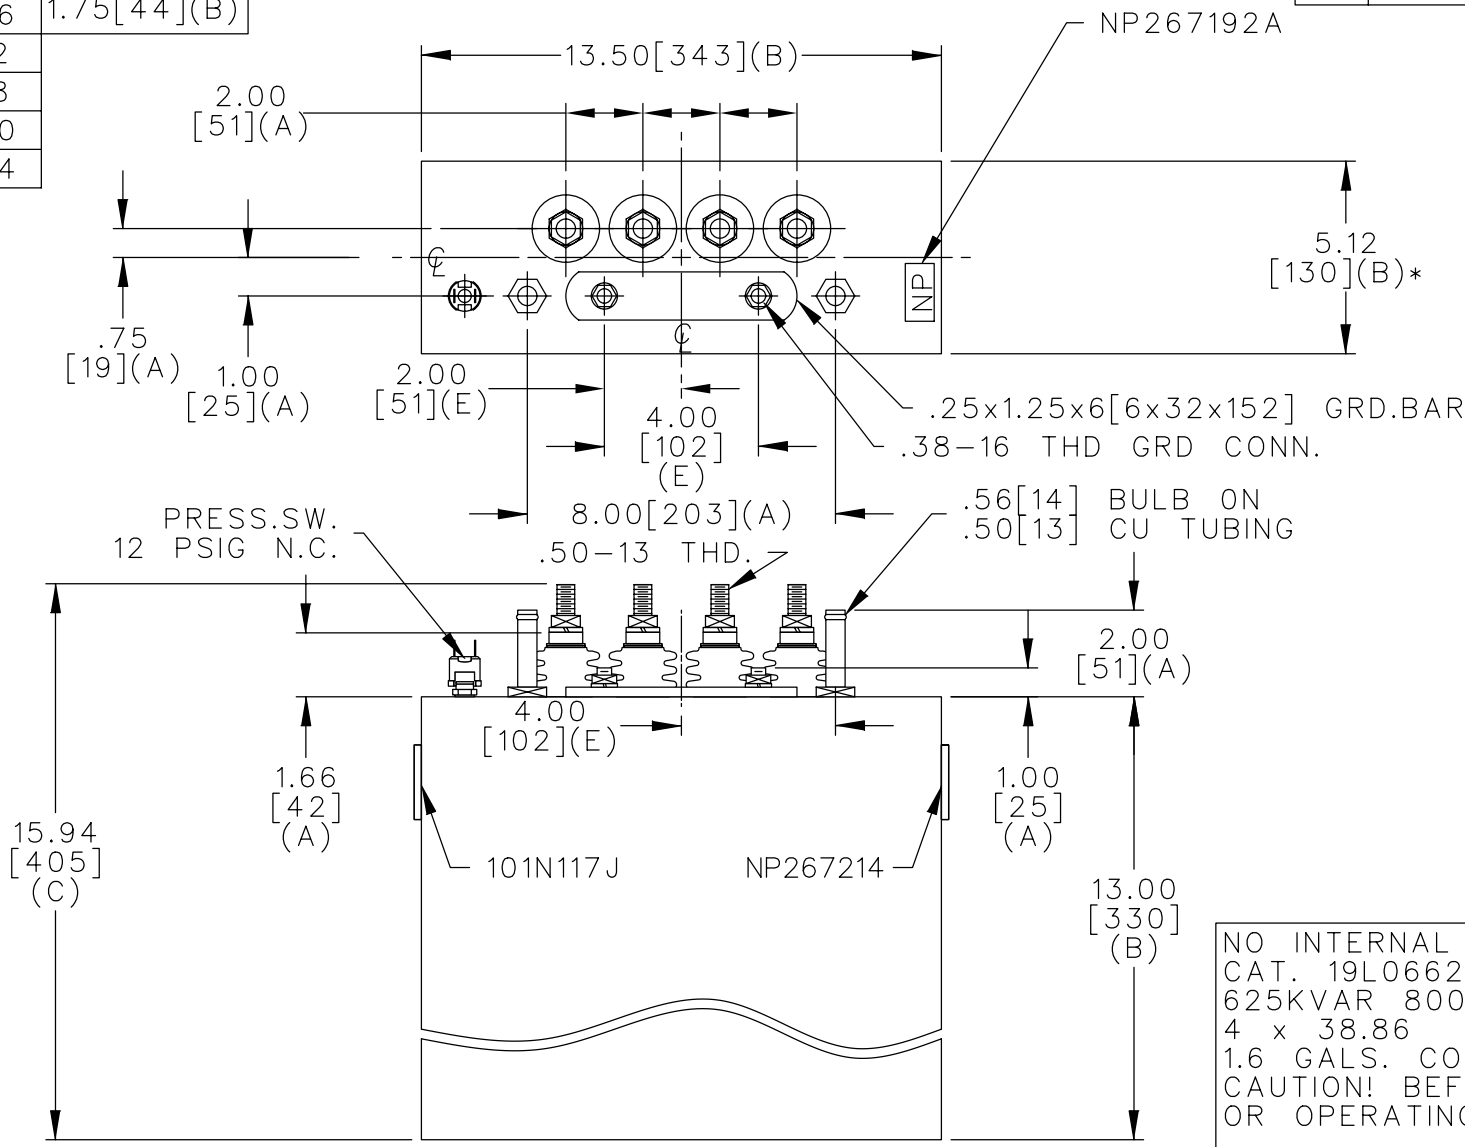

TERM	uF	kVAR
1	38.86	156.2
2	38.86	156.2
3	38.86	156.2
4	38.86	156.2

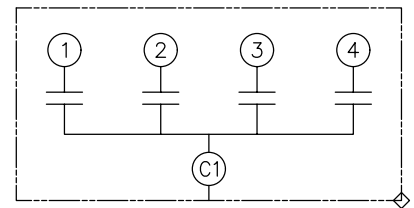

SCHEMATIC DIAGRAM - 416

NO INTERNAL DISCH RESISTORS
 CAT. 19L0662WH2 SN
 625KVAR 800VOLTS 1000HZ 1PH
 4 x 38.86 UF
 1.6 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2736
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0662WH2		DISTR TO
	DRAWN E.McGINN	JULY 22, 1998	SCALE			
ISSUED	7-22-98	SHEET 2	CONT. ON			