



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

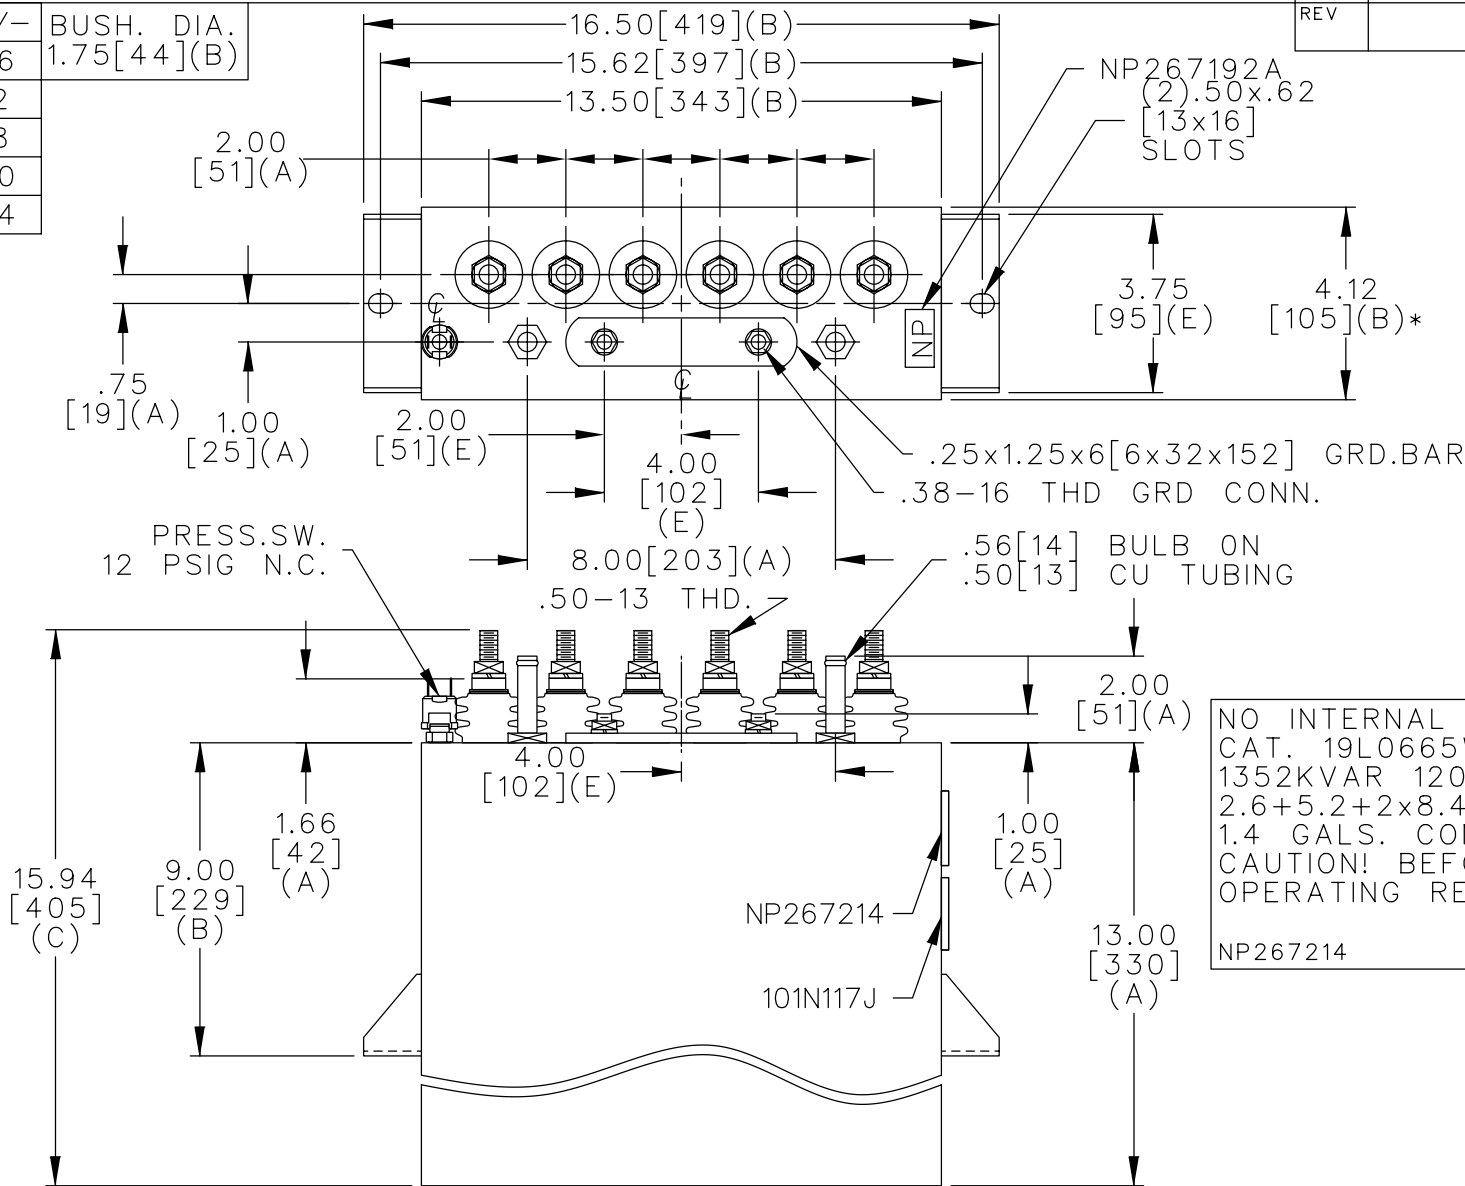

TERM	uF	kVAR
1	2.6	70.5
2	5.2	141
3	8.4	228
4	8.4	228
5	12.6	342
6	12.6	342

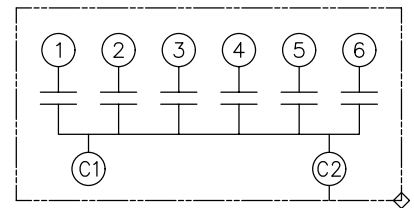

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0665WH4 SN  
 1352KVAR 1200V 3000HZ 1PH  
 2.6+5.2+2x8.4+2x12.6 UF/TAP  
 1.4 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0665WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAY 3, 2001	SCALE		
ISSUED				DISTR TO	