



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

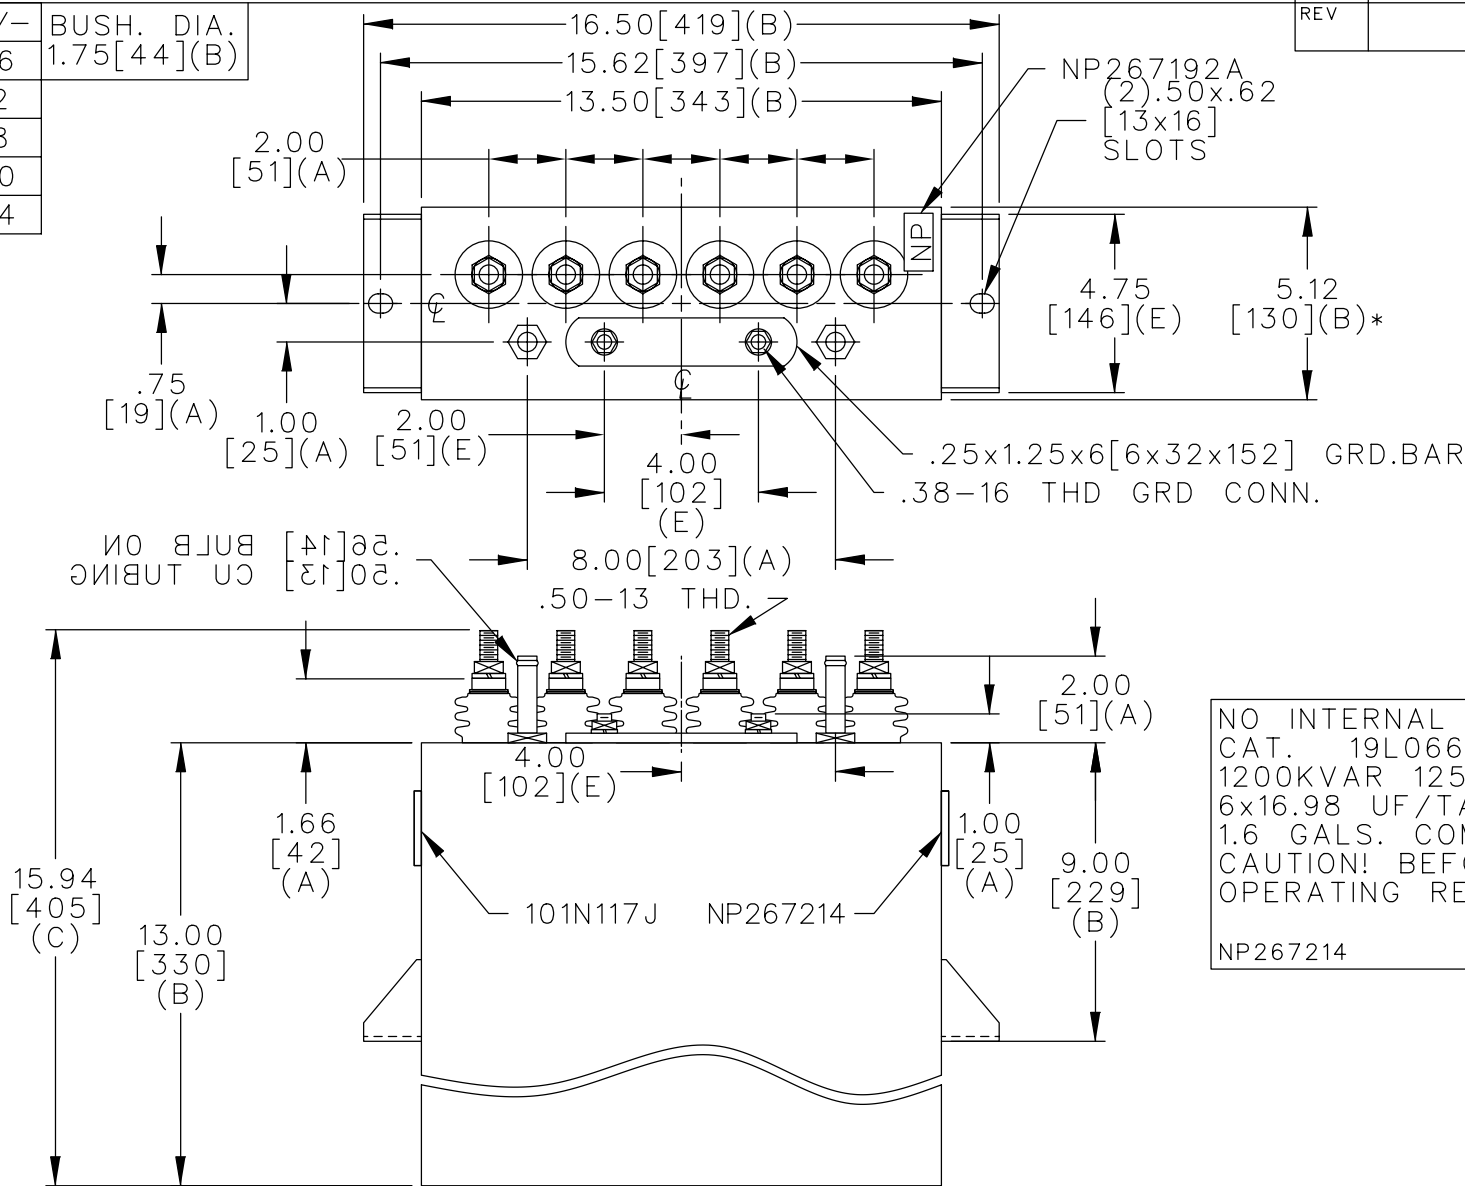

TERM	uF	kVAR
1	16.98	200
2	16.98	200
3	16.98	200
4	16.98	200
5	16.98	200
6	16.98	200

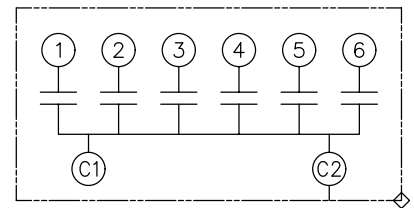

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0667WH3 SN
 1200KVAR 1250V 1200HZ 1PH
 6x16.98 UF/TAP
 1.6 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE A	OUTLINE 19L0667WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN APR. 20, 2000	ISSUED		

DISTR TO