



TOL	+/-	BUSH. DIA.
A	.06	1.75[.44](B)
B	.12	
C	.18	
D	.50	
E	.04	

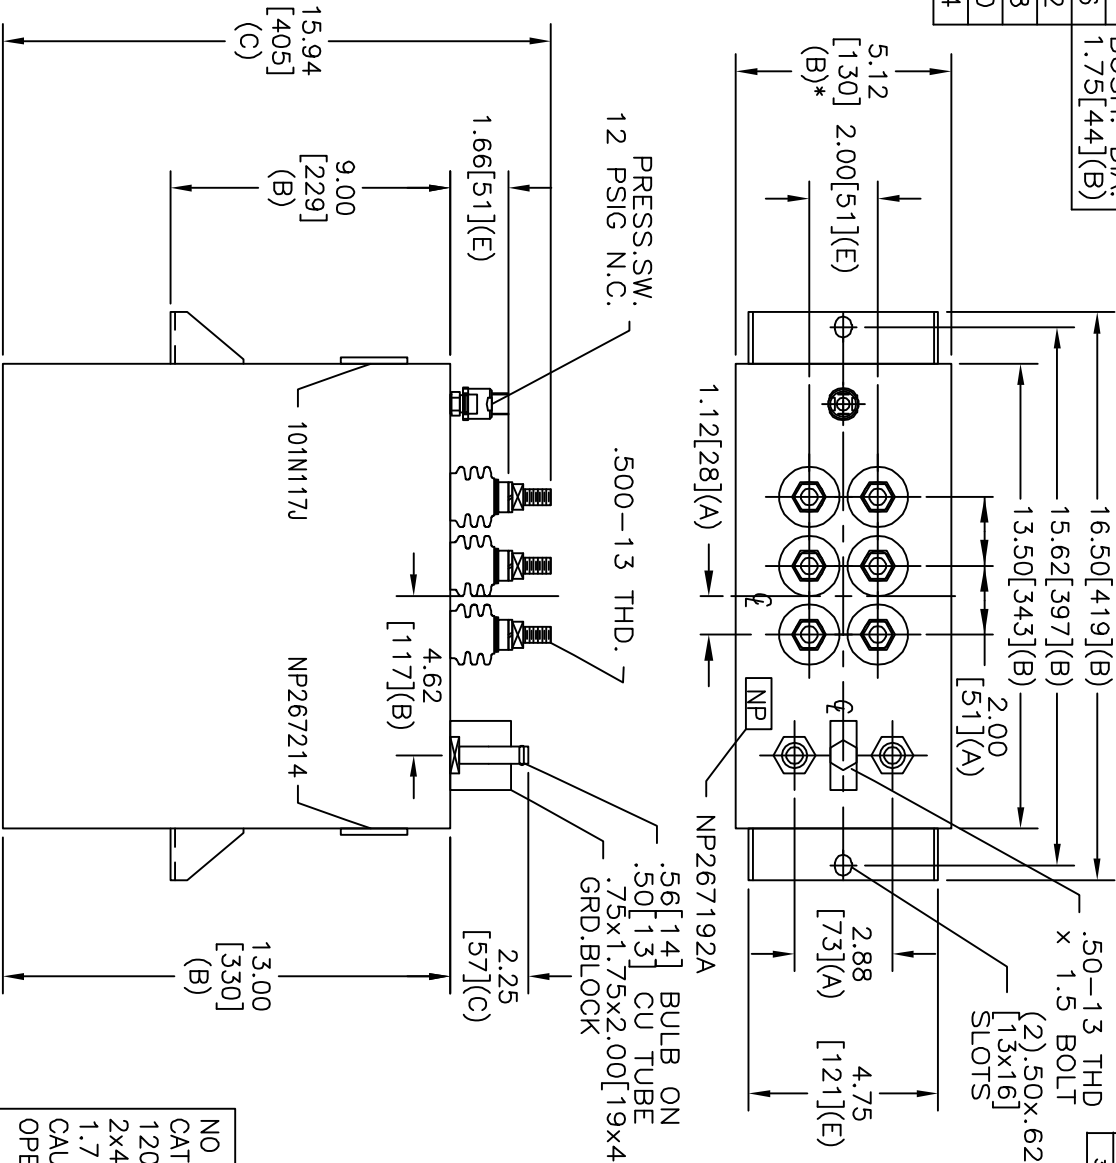

SIZE	DWG NO	SHT	REV
A	19L0668WH4	2	3
REV	DESCRIPTION	DATE	APPROVED
3	UPDATE NP	7/21/04	BTR

TERM	UF	KVAR
1	4.09	100
2	4.09	100
3	8.19	200
4	8.19	200
5	12.28	300
6	12.28	300



NO INTERNAL DISCH RESISTORS
 CAT. 19L0668WH4 SN
 1200KVAR 1800V 1200HZ 1PH
 2x4.1+2x8.2+2x12.3 UF/TAP
 1.7 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE
 MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn
 DATE 1-28-98

ISSUED
 DATE 1-28-98

SIZE **A**

OUTLINE
 19L0668WH4

SHEET 2 CONT 3