



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

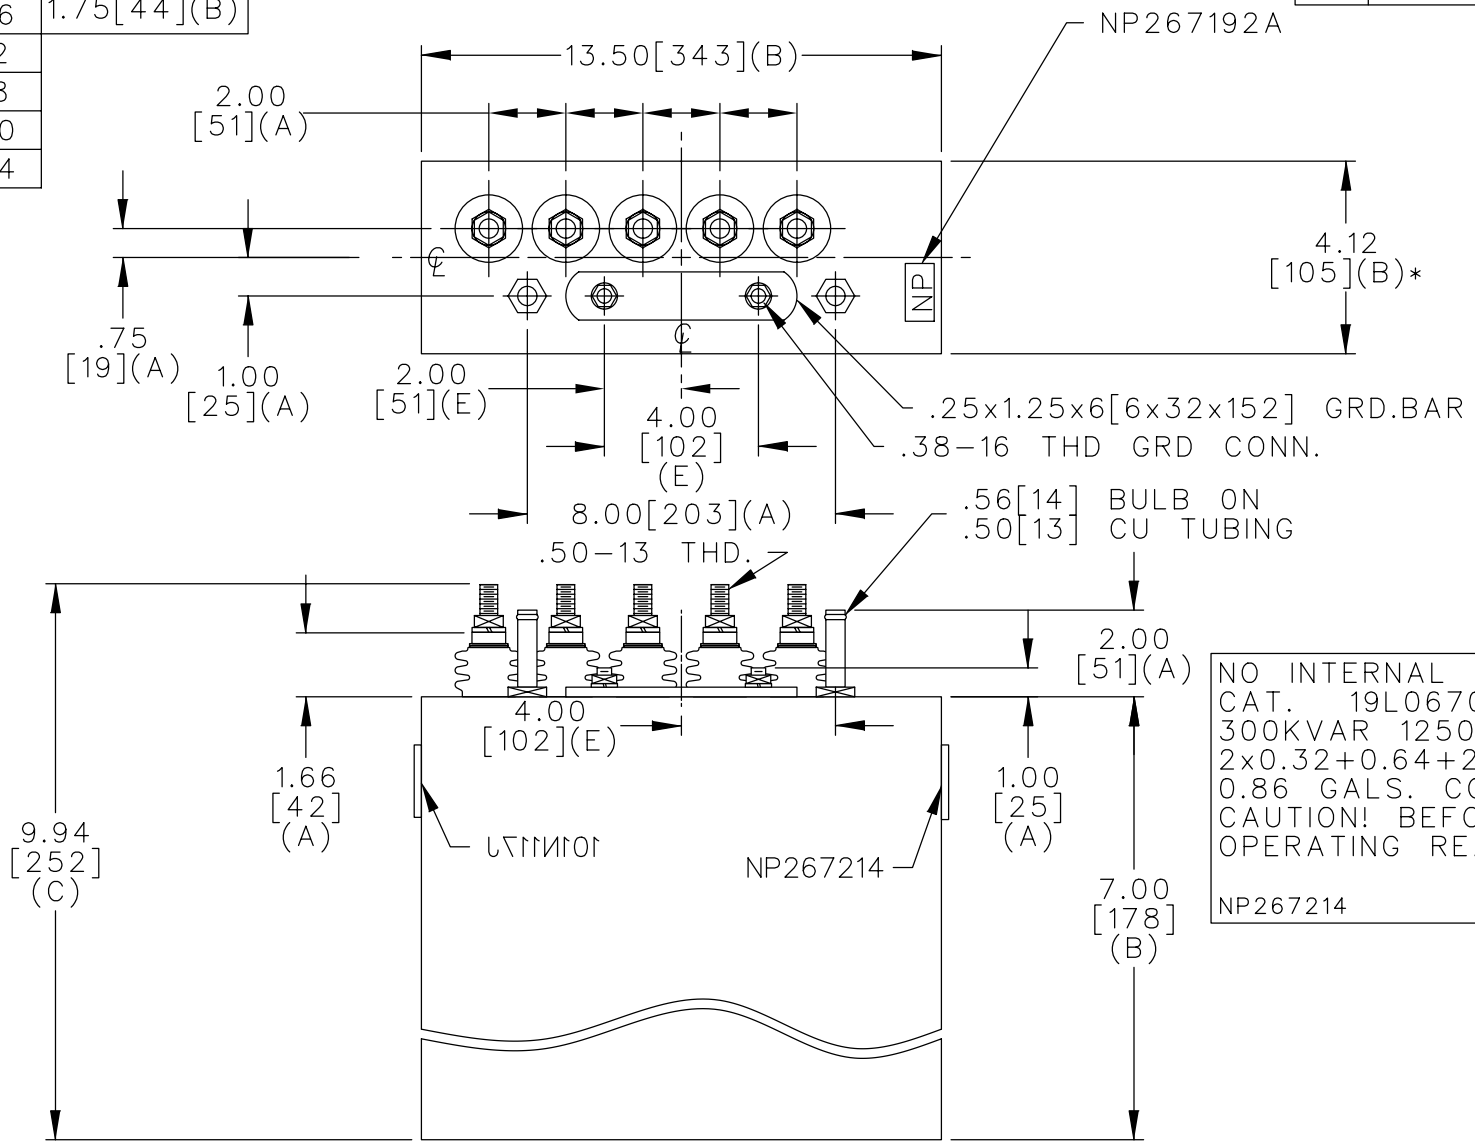

TERM	uF	kVAR
1	0.32	30.2
2	0.32	30.2
3	0.64	61.8
4	0.95	88.9
5	0.95	88.9

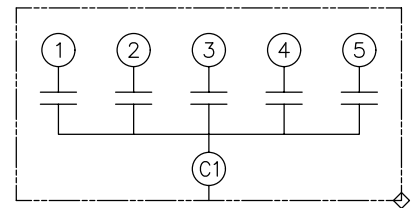

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0670WH1 SN
 300KVAR 1250V 9600HZ 1PH
 2x0.32+0.64+2x0.95UF/TAP
 0.86 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0670WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 13, 1998			
ISSUED					DISTR TO