



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

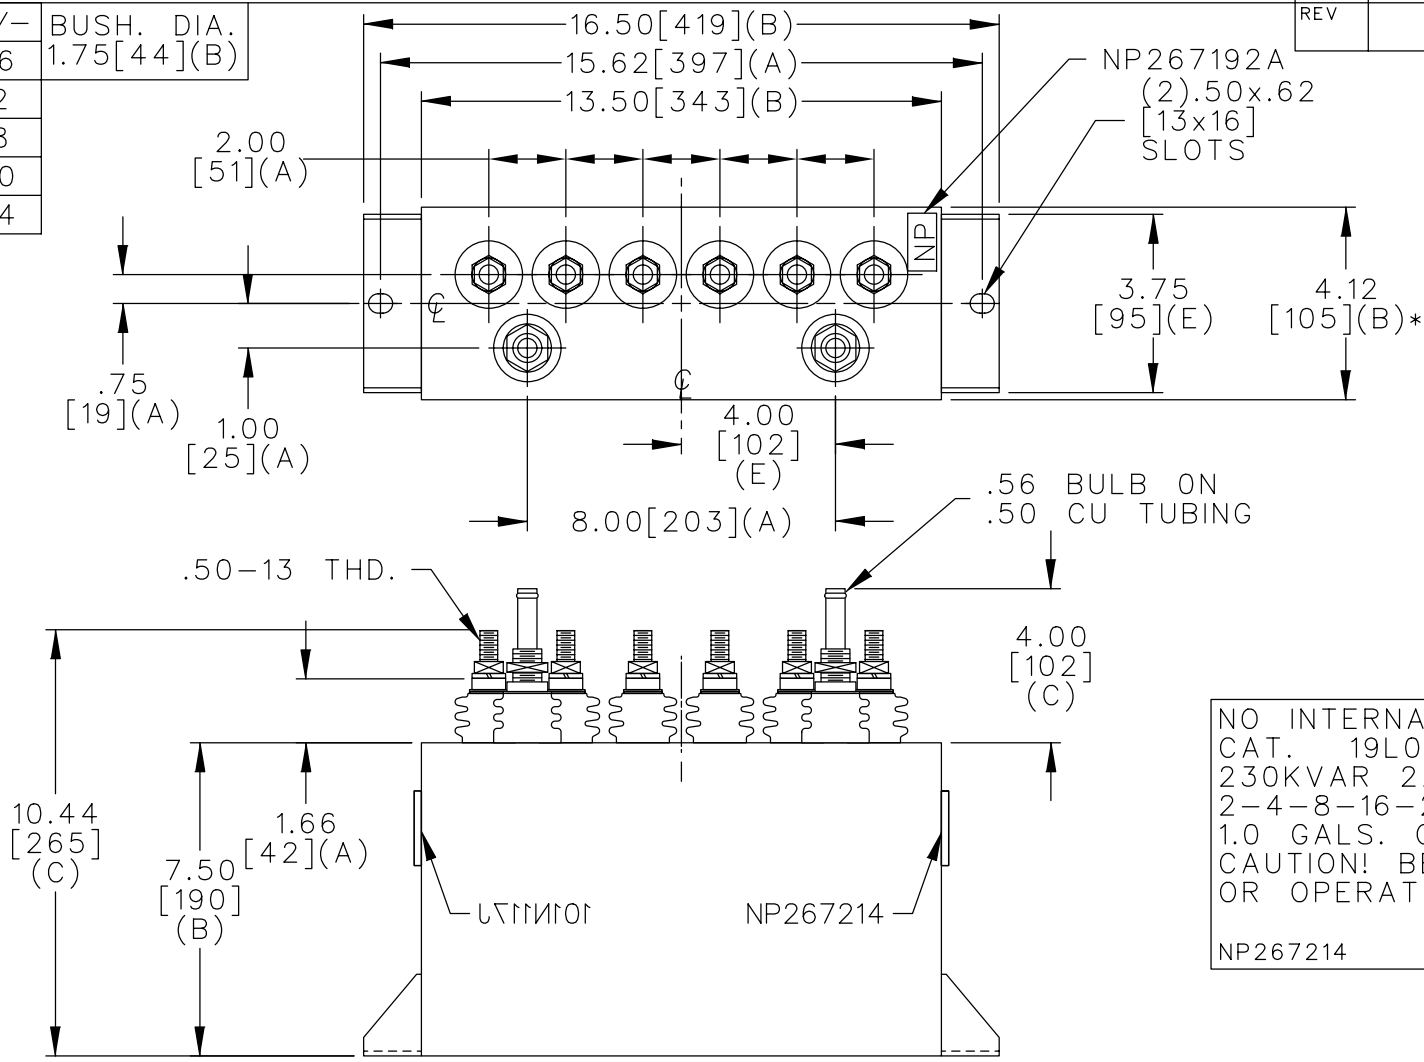

TERM	uF	kVAR
1	2.06	6.0
2	4.11	12.0
3	8.07	24.0
4	16.14	48.0
5	24.2	70.0
6	24.2	70.0

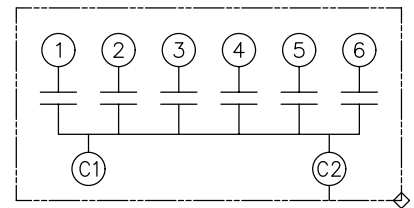

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0677WH3 SN
 230KVAR 220V 9600HZ 1PH
 2-4-8-16-2x24 UF/TAP
 1.0 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0677WH3	
	DRAWN E.McGINN	JAN. 13, 2000	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO