



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

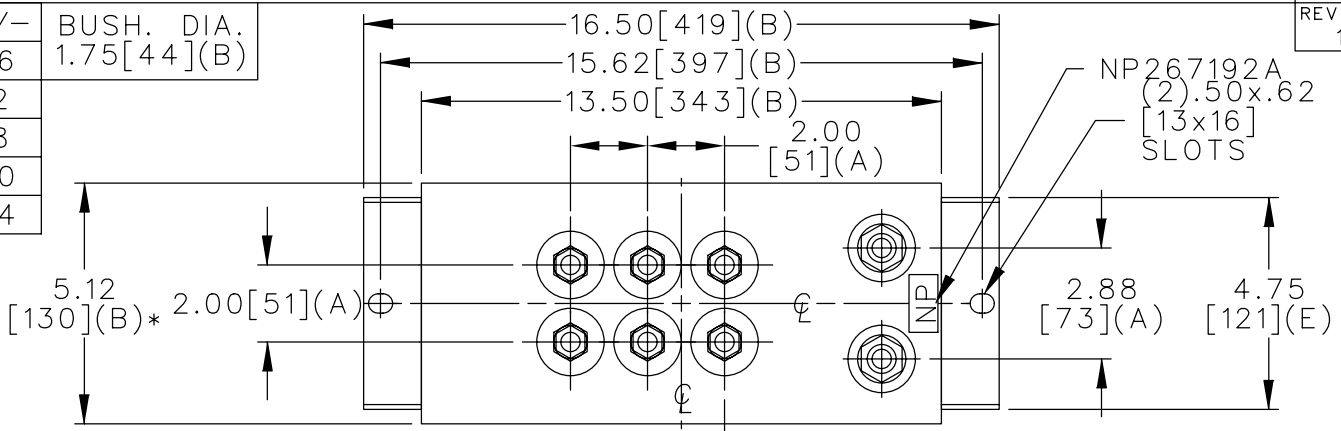


TERM	uF	kVAR
1	16.66	268
2	16.66	268
3	16.66	268
4	16.66	268
5	16.66	268
6	16.66	268

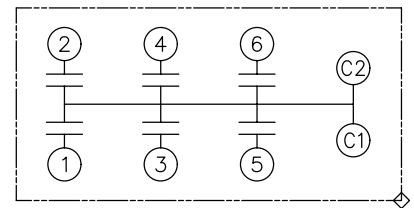

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT. 19L0679WH3 SN
 1608KVAR 800V 4KHZ
 1.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

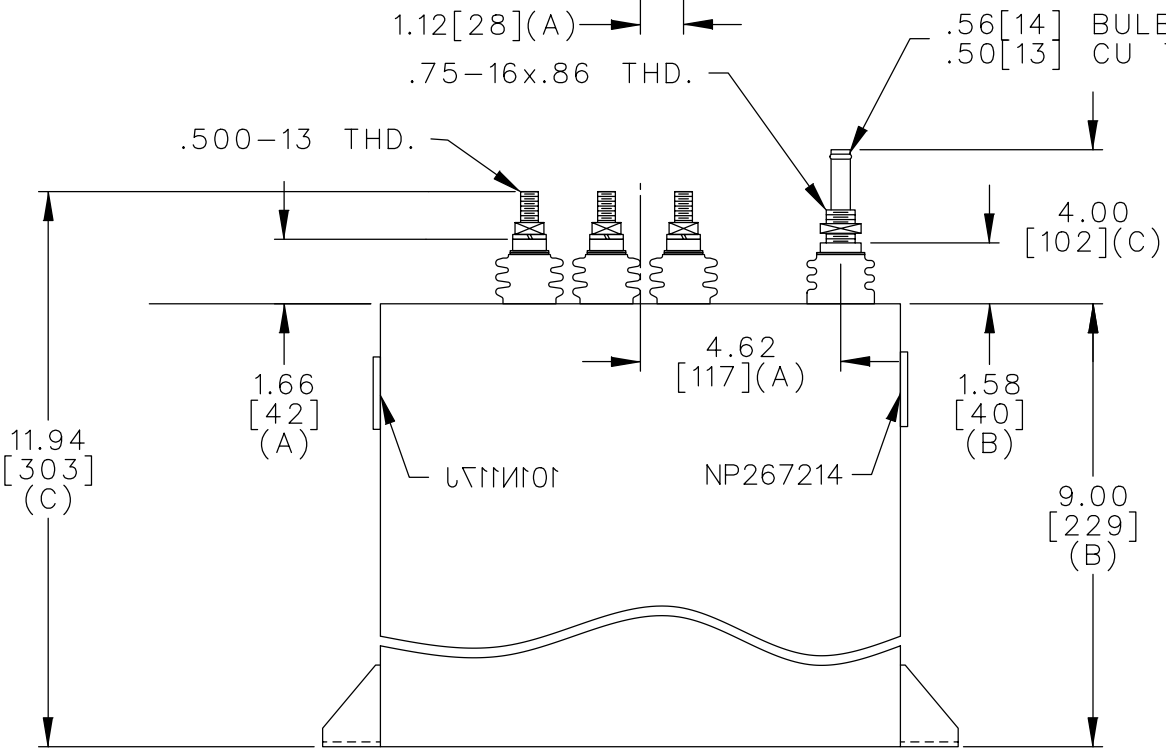

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0679WH3	SHEET 2 CONT. ON -
	DRAWN TMO	MAR 3, 1997	SCALE		
ISSUED	3-19-97				

DISTR TO