




TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

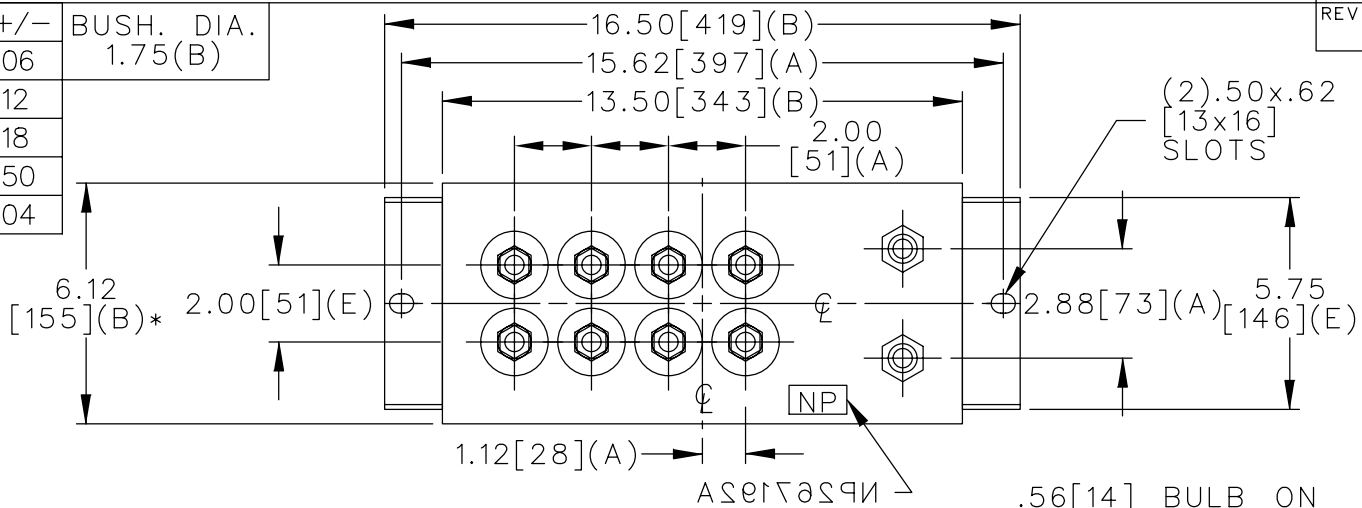

TERM	uF	kVAR
1	8.5	83.44
2	17.0	166.9
3	34.0	333.8
4	34.0	333.8
5	34.0	333.8
6	34.0	333.8
7	34.0	333.8
8	34.0	333.8

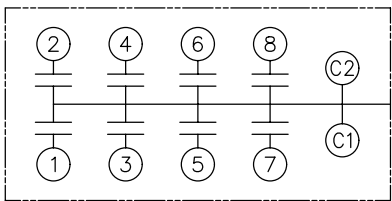

SCHEMATIC DIAGRAM - 801

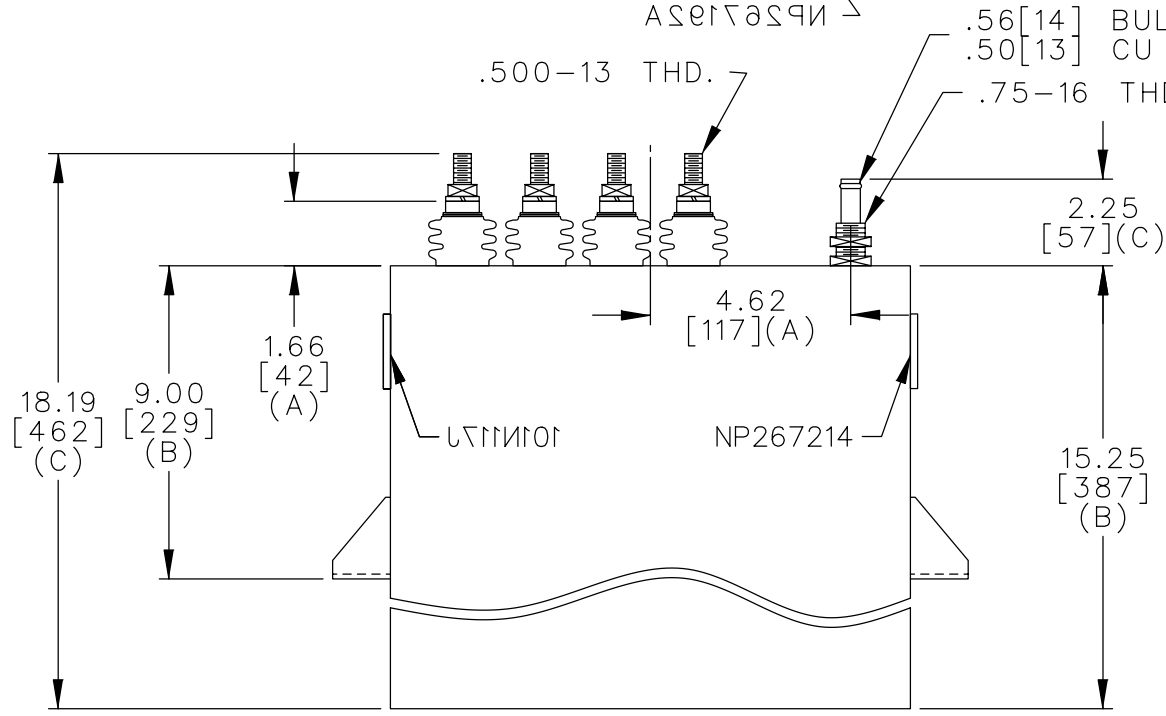

NO INTERNAL DISCH RESISTORS
 CAT. 19L0680WH3 SN
 2253KVAR 1250V 1000HZ 1PH
 8.5+17+6x34 UF/TAP
 2.2 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0680WH3	
	DRAWN E.McGINN	OCT. 1, 1998	SCALE		
	ISSUED	10-7-98	SHEET 2	CONT. ON -	

DISTR TO