




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

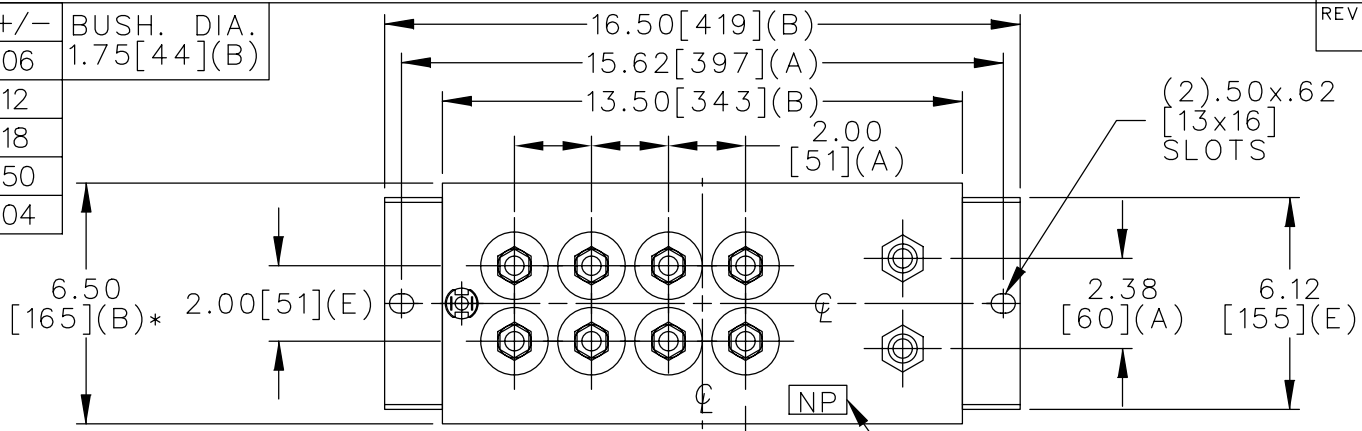

TERM	uF	kVAR
1	21.22	144
2	21.22	144
3	21.22	144
4	21.22	144
5	21.22	144
6	21.22	144
7	21.22	144
8	21.22	144

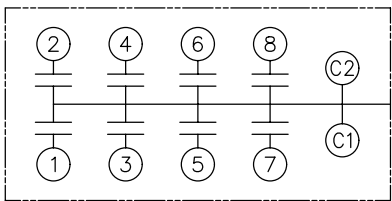

SCHEMATIC DIAGRAM - 801

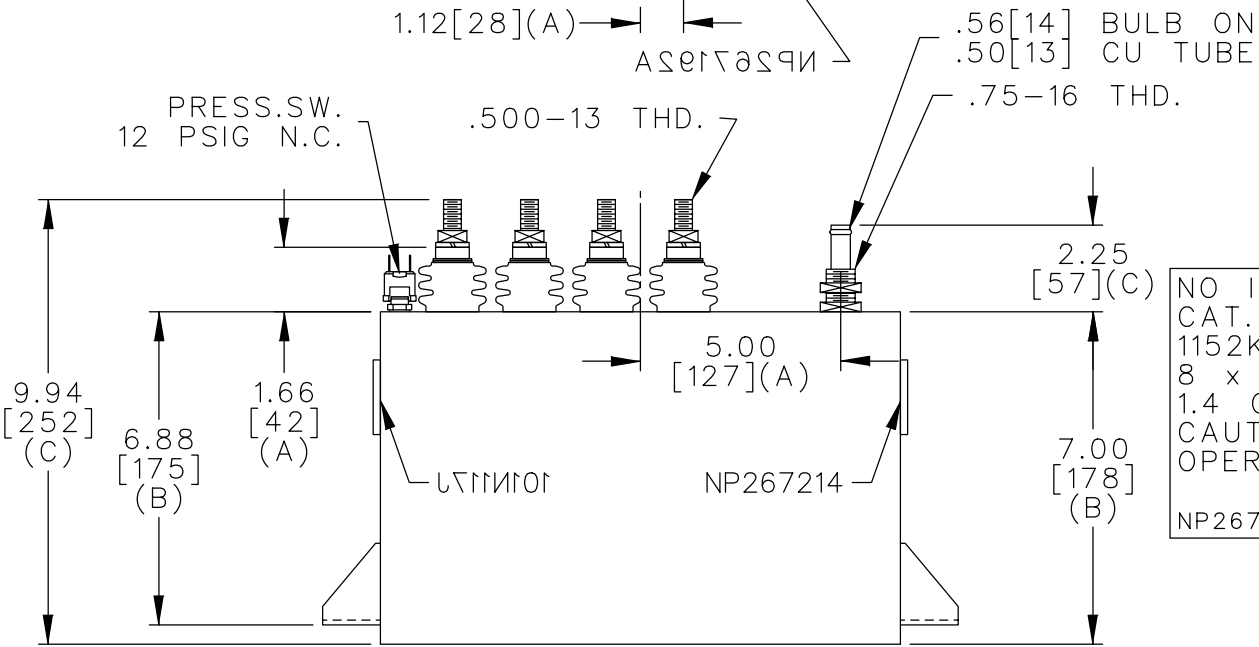

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0687WH4 SN  
 1152KVAR 600V 3000HZ 1PH  
 8 x 21.22UF/TAP  
 1.4 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0687WH4</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JULY 27, 1998	SCALE		
ISSUED					