




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

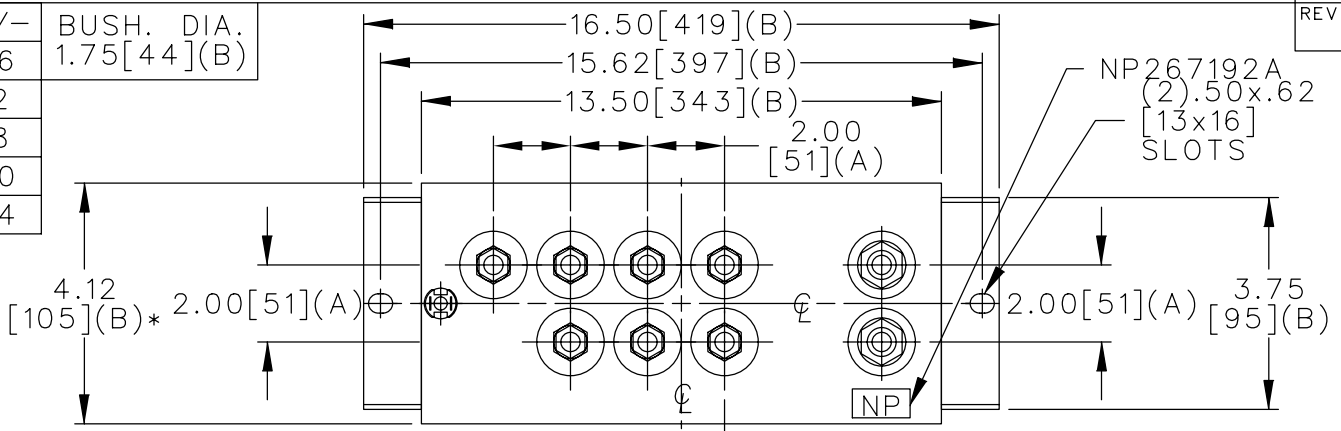

TERM	uF	kVAR
1	2.99	34
2	5.99	68
3	8.99	102
4	8.99	102
5	8.99	102
6	8.99	102
7	8.99	102

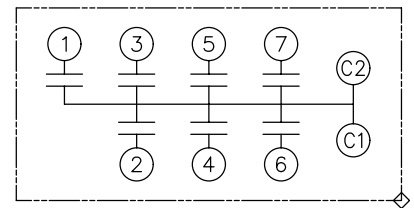

SCHEMATIC DIAGRAM - 705

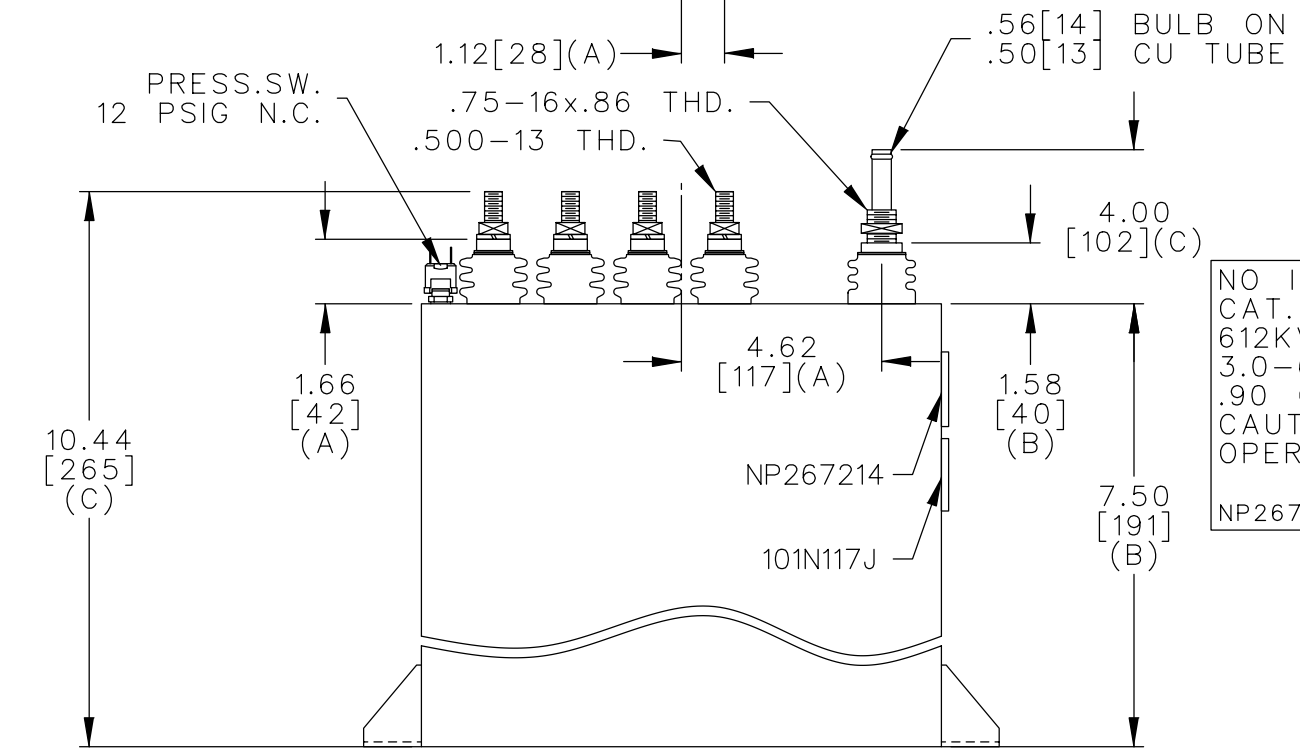

NO INTERNAL DISCH RESISTORS
 CAT. 19L0694WH4 SN
 612KVAR 425V 10000HZ 1PH
 3.0-6.0-5x9.0UF/TAP
 .90 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0694WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN DEC. 5, 1996	ISSUED 12-11-96	SCALE		