




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

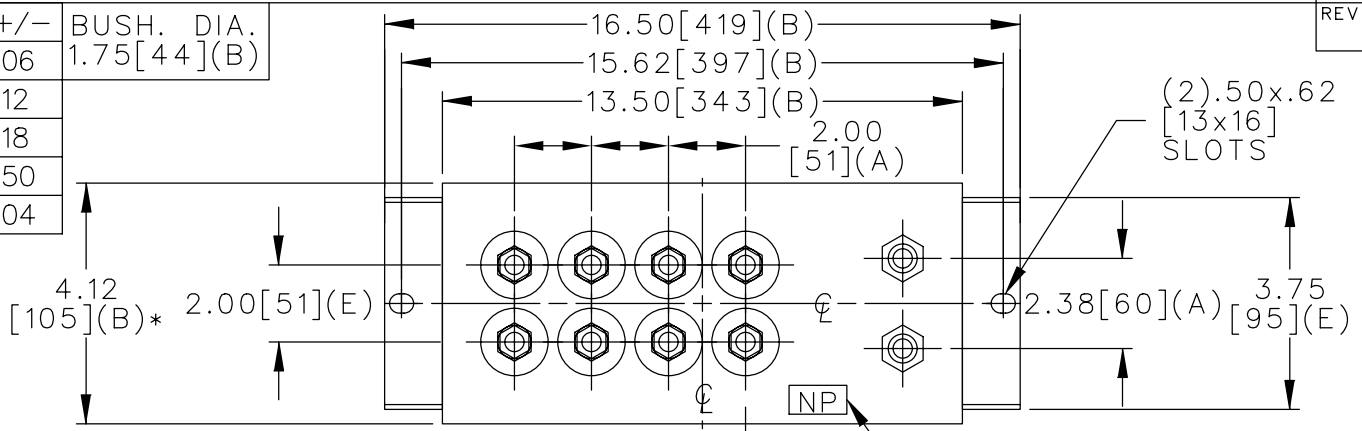

TERM	uF	kVAR
1	4.35	614.25
2	4.35	614.25
3	4.35	614.25
4	4.35	614.25

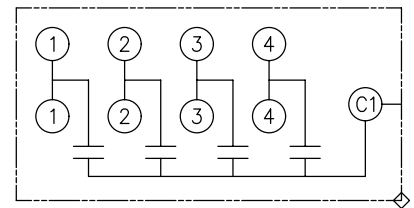

SCHEMATIC DIAGRAM - 411

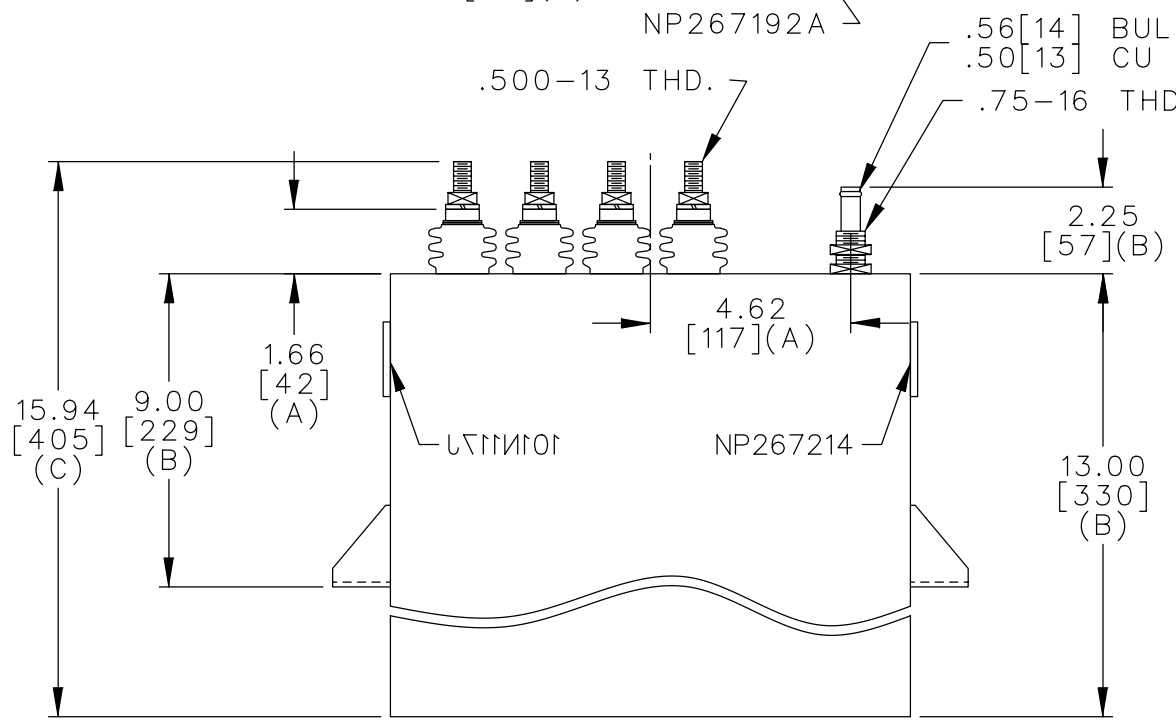

NO INTERNAL DISCH RESISTORS
 CAT. 19L0697WH3 SN
 2457KVAR 1500V 10000HZ 1PH
 4 X 4.35 UF/TAP
 1.4 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0697WH3</h2>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	APR. 29, 1997	SCALE				
ISSUED	4-30-97						

DISTR TO