



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

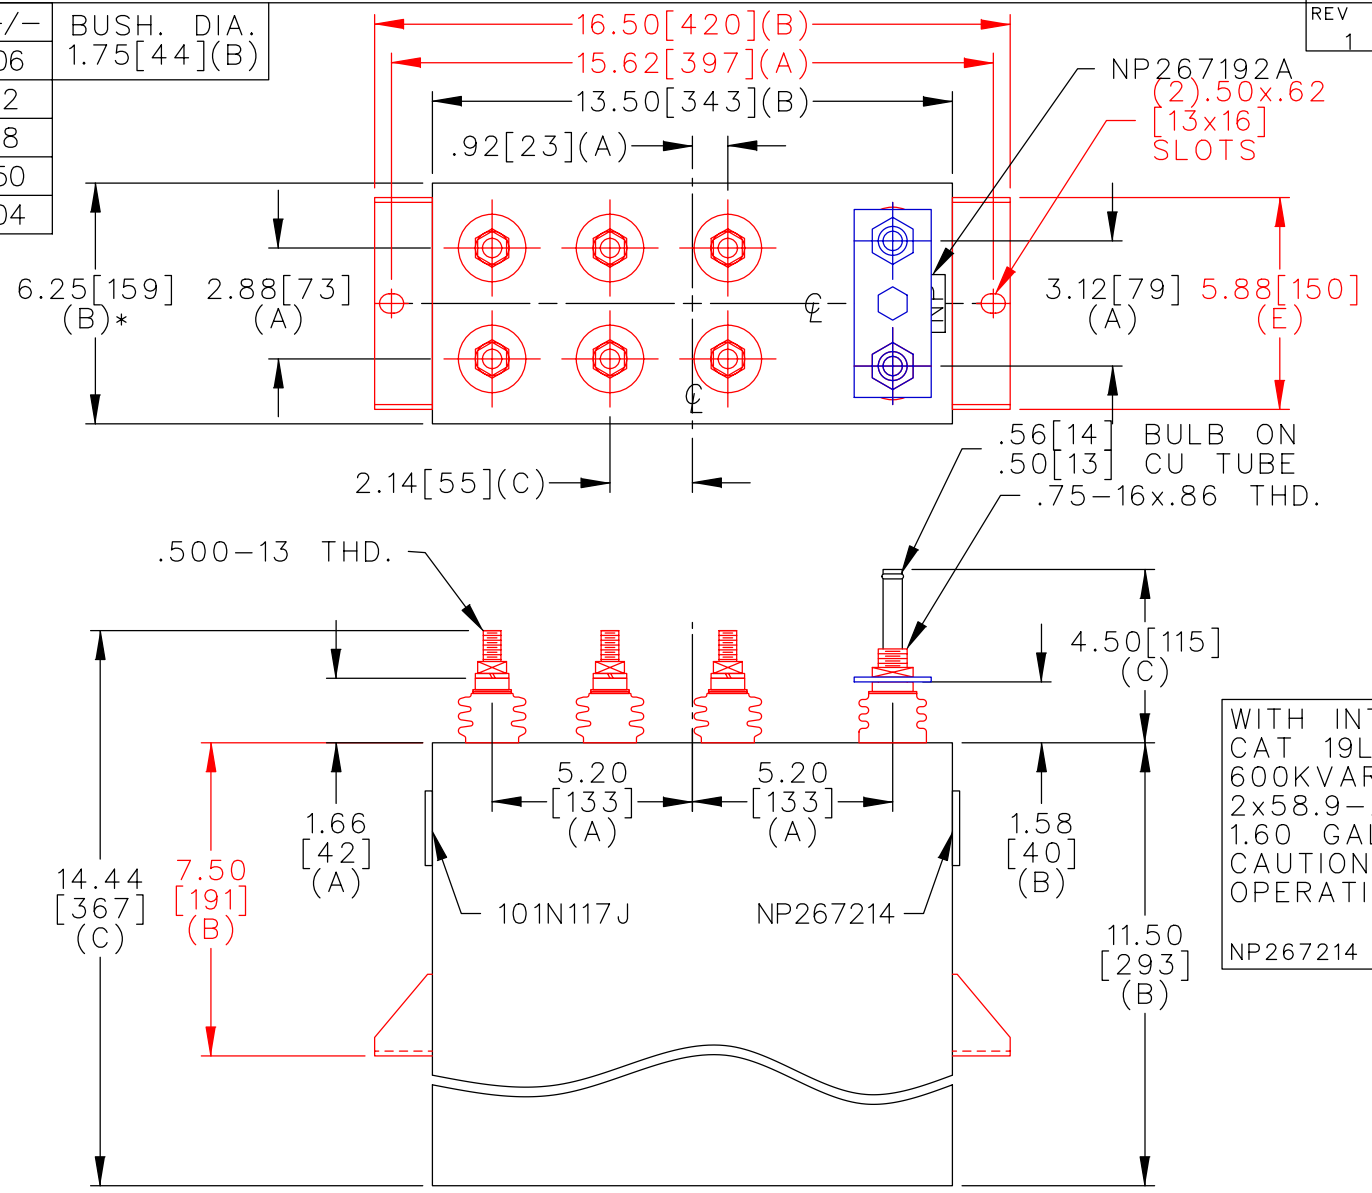

TERM	uF	kVAR
1	58.95	200
2	58.95	200
3	29.47	100
4	14.74	50
5	7.37	25
6	7.37	25

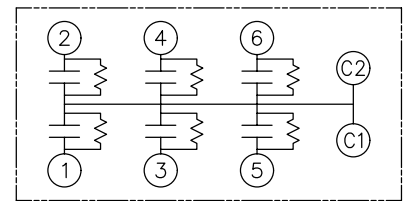

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS  
 CAT 19L0700WH3 SN  
 600KVAR 1000V 540HZ 1PH  
 2x58.9-29.4-14.7-2x7.4UF/TAP  
 1.60 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 51 / 23 LB/KG	<b>OUTLINE</b> <b>19L0700WH3</b>	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	OCT. 10, 1997	SCALE	DISTR TO		
ISSUED	10-15-97					