



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

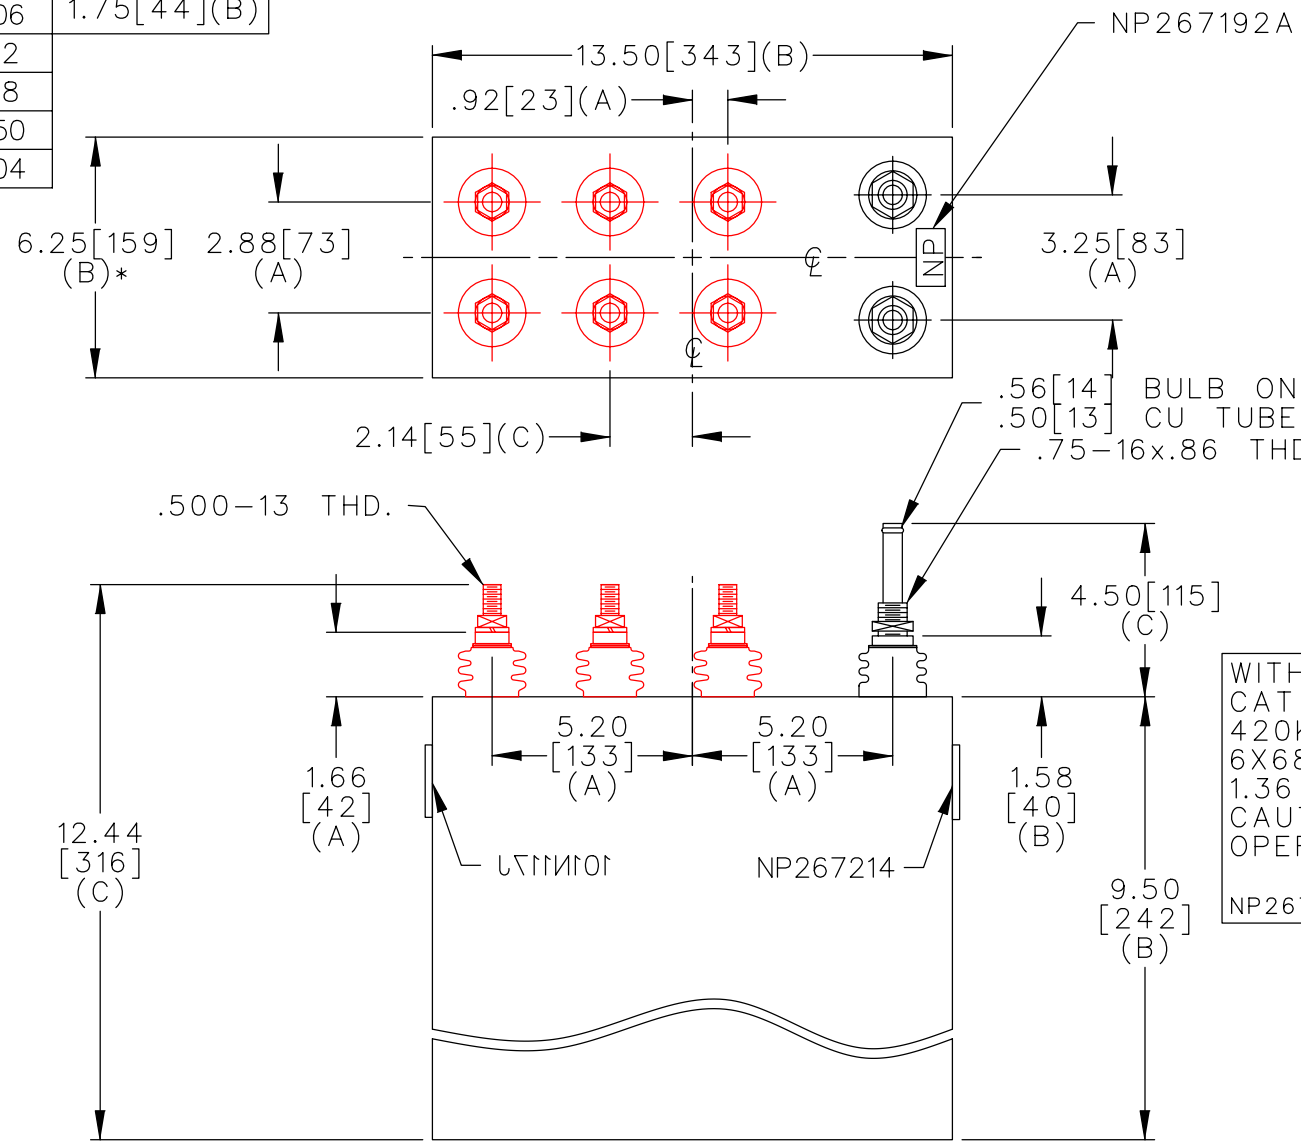

TERM	uF	kVAR
1	68.2	70
2	68.2	70
3	68.2	70
4	68.2	70
5	68.2	70
6	68.2	70

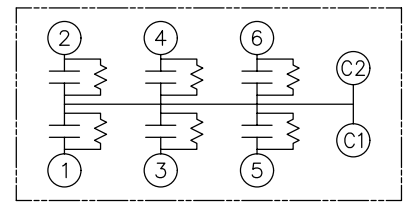

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS  
 CAT 19L0701WH1 SN  
 420KVAR 550V 540HZ 1PH  
 6X68.20 UF/TAP  
 1.36 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 45 / 20 LB/KG	<h1>OUTLINE</h1> <h1>19L0701WH1</h1>	SHEET 2 CONT. 3 ON ON 3
	DRAWN 11/07/96	LRD 11/07/96	SCALE WC6	version		
ISSUED						

DISTR TO