
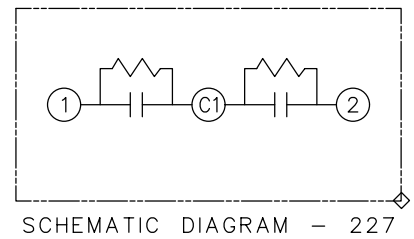


TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.03

SIZE	DWG NO.	SH	REV
A	19L0708WH3	2	
REV	McGINN UPDATE CAT NO		
1			

TERM	uF
1	425
2	425

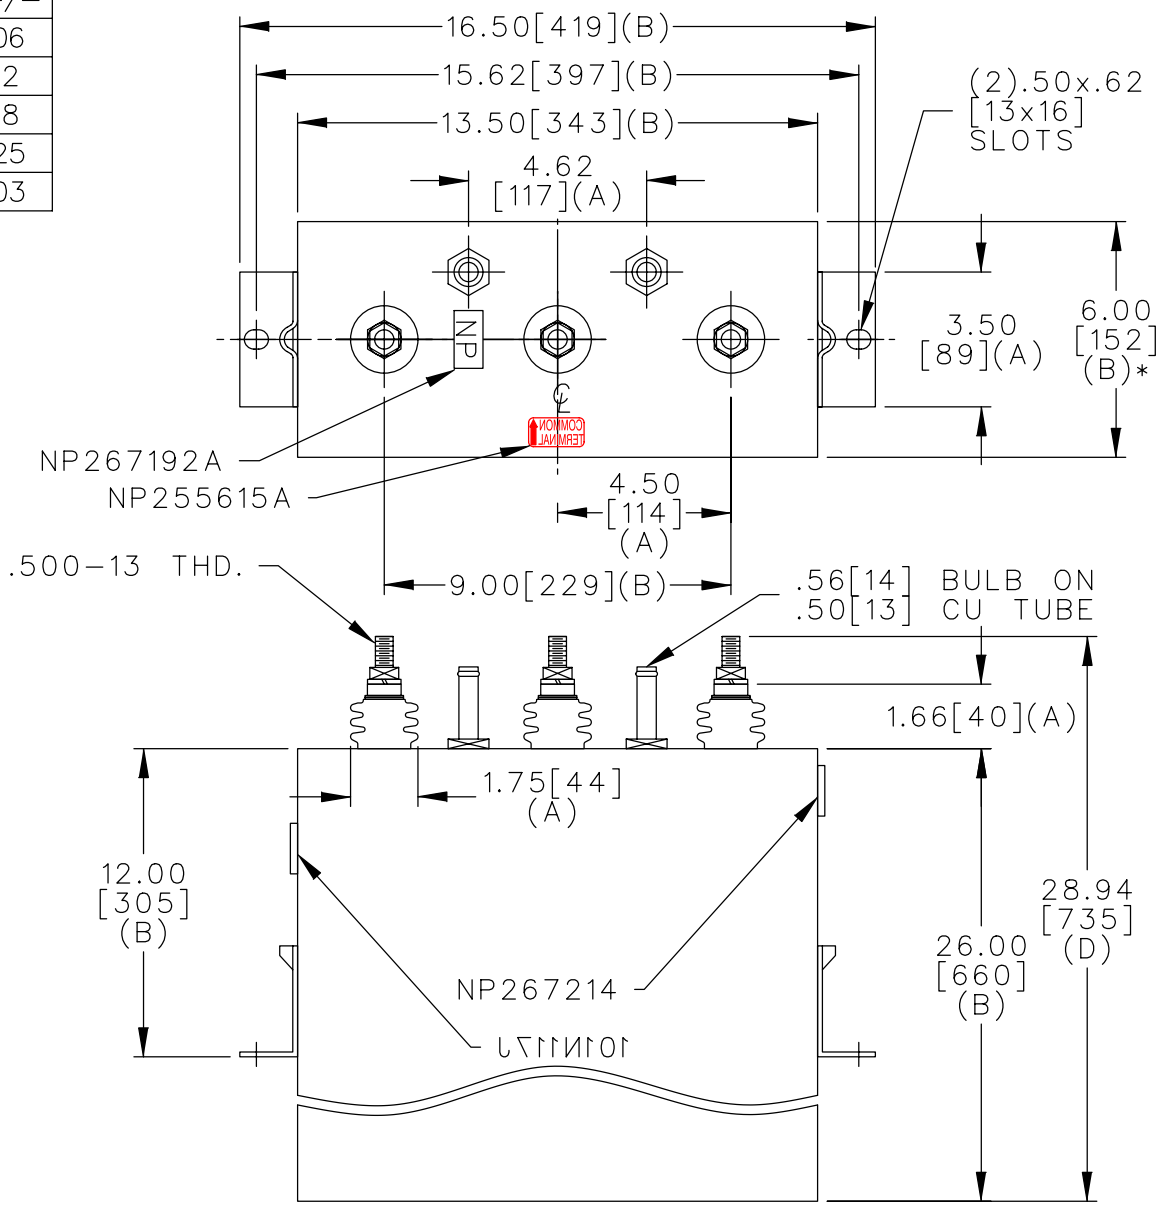

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0708WH3 SN
 950 VDC 425/425 uF
 250 ARMS 1400 Hz
 28 ARMS 360 Hz
 3.35 GALS COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	FSCM NO	OUTLINE 19L0708WH3	DISTR TO
	DRAWN TMO	FEB 28, 1997	SCALE	SHEET 2 CONT 3		
ISSUED	3-5-97					