
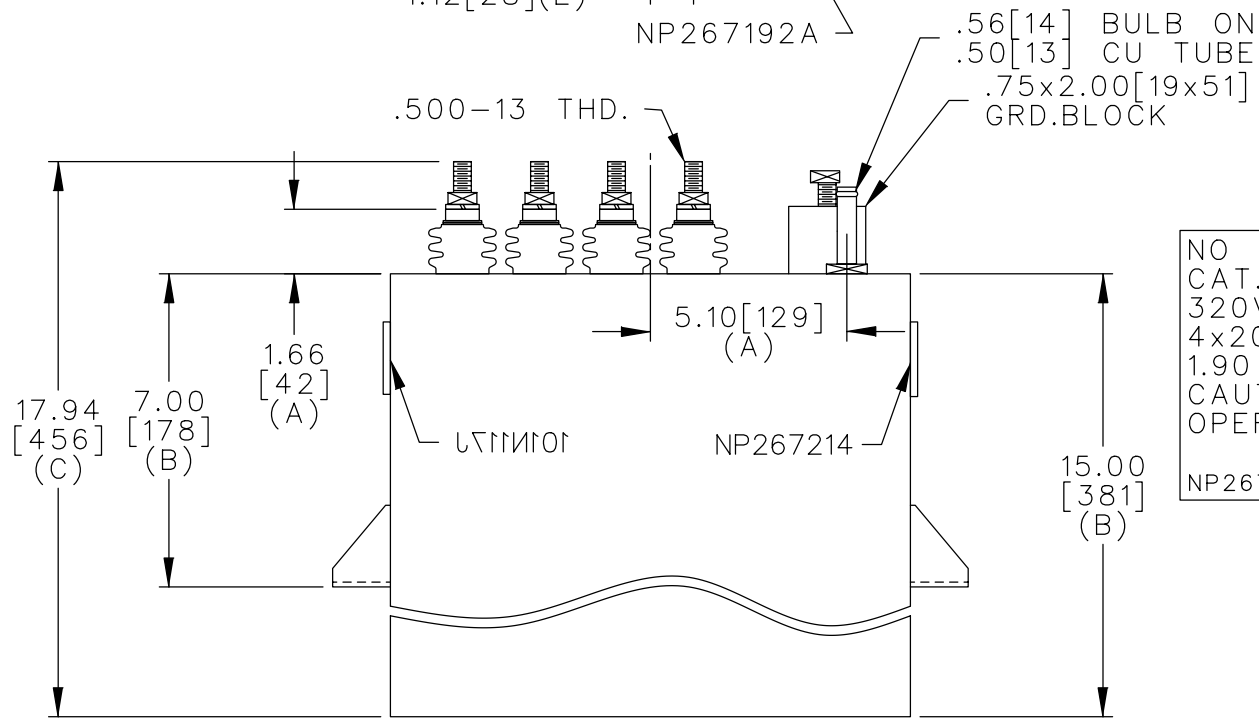
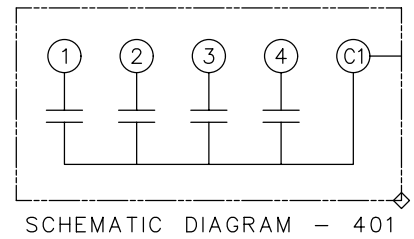


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

TERM	uF
1	200
2	200
3	200
4	200

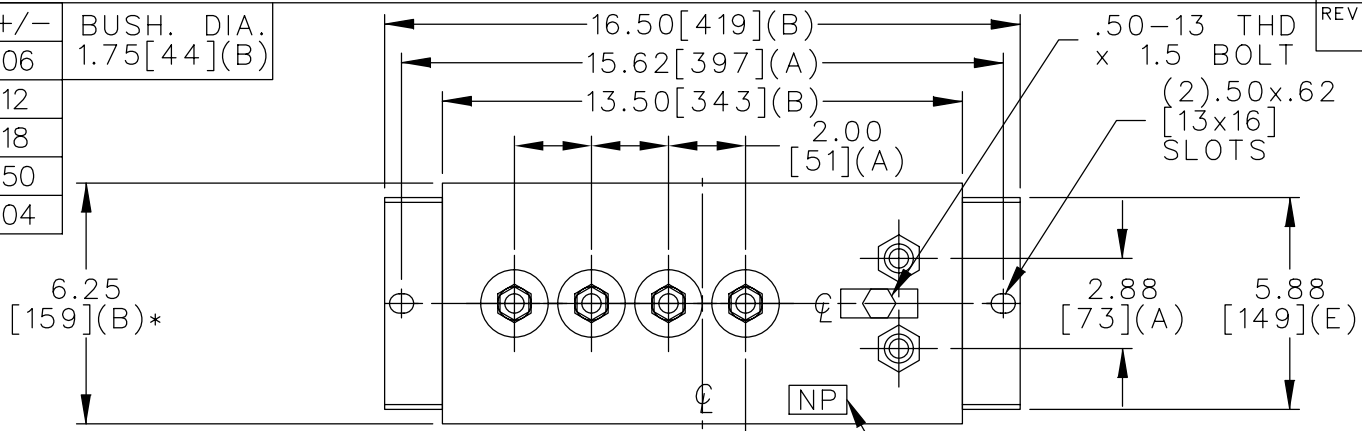

NO INTERNAL DISCH RESISTORS
 CAT. 19L0735WH3 SN
 320VDC 800UF 600AMPS MAX
 4x200 UF/TAP
 1.90 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0735WH3		SHEET 2 CONT. 3
	DRAWN E.McGINN DEC. 6, 2000	ISSUED	SCALE			