



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	(2).50x.62
C	.18	[13x16]
D	.50	SLOTS
E	.04	

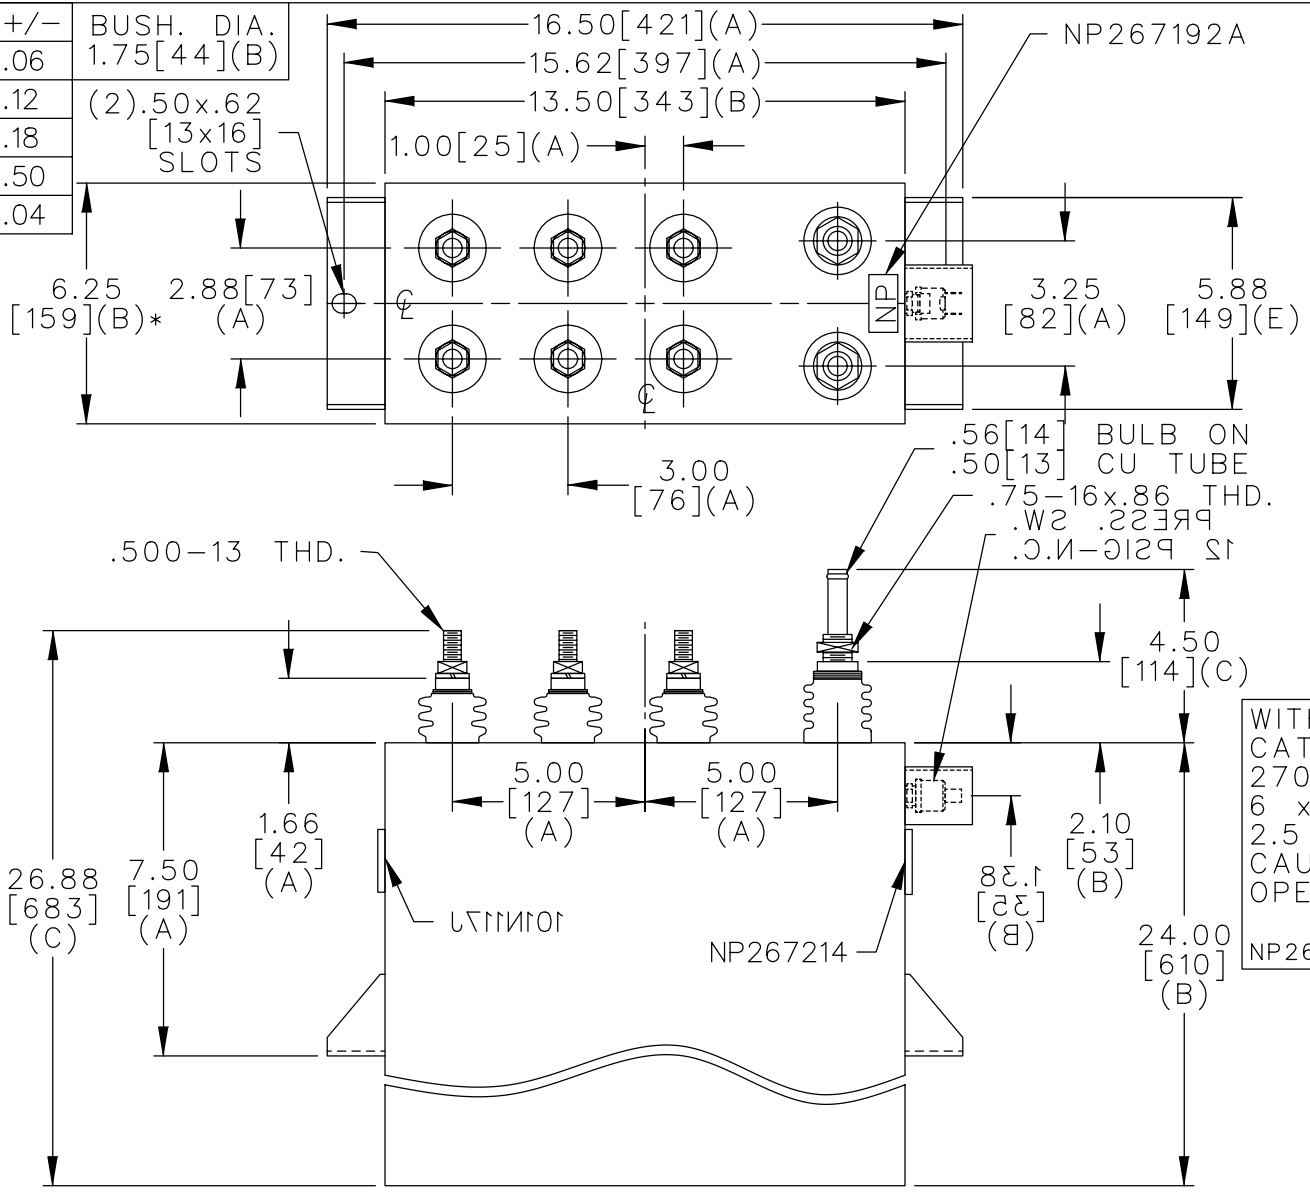

TERM	uF	kVAR
1	53.05	363.67
2	53.05	363.67
3	53.05	363.67
4	53.05	363.67
5	53.05	363.67
6	53.05	363.67

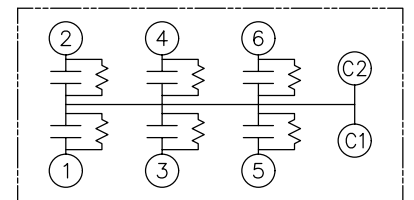

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0758WH4 SN
 2700KVAR 1500V 600HZ 1PH
 6 x 53.05UF/TAP
 2.5 GALS COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0758WH4	SHEET 2 CONT. 3 ON 3
	DRAWN E.McGINN	FEB. 2, 2000	SCALE		
ISSUED					

DISTR TO