
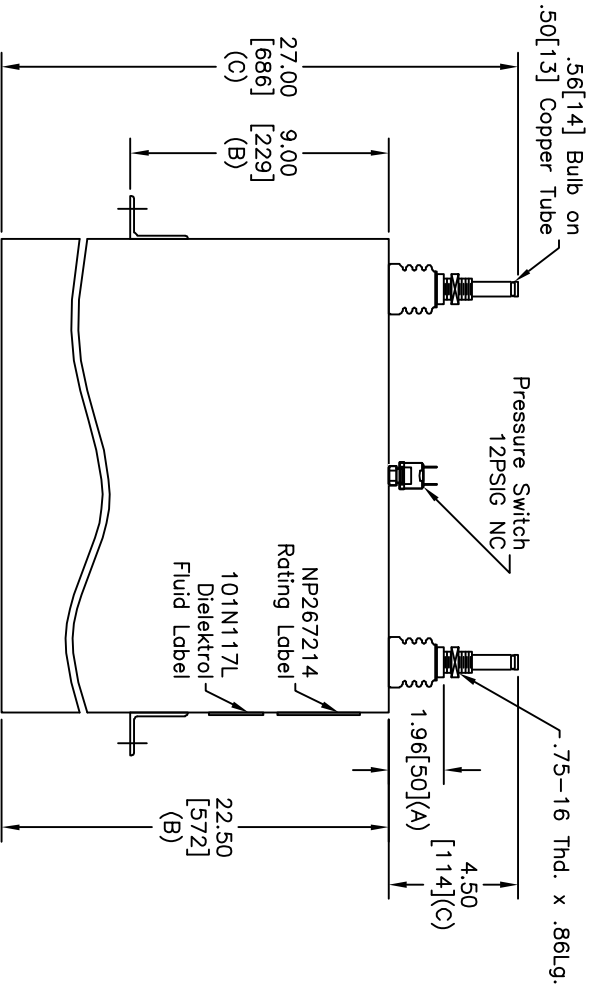



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH, DIA. 1.75[.44](B)	

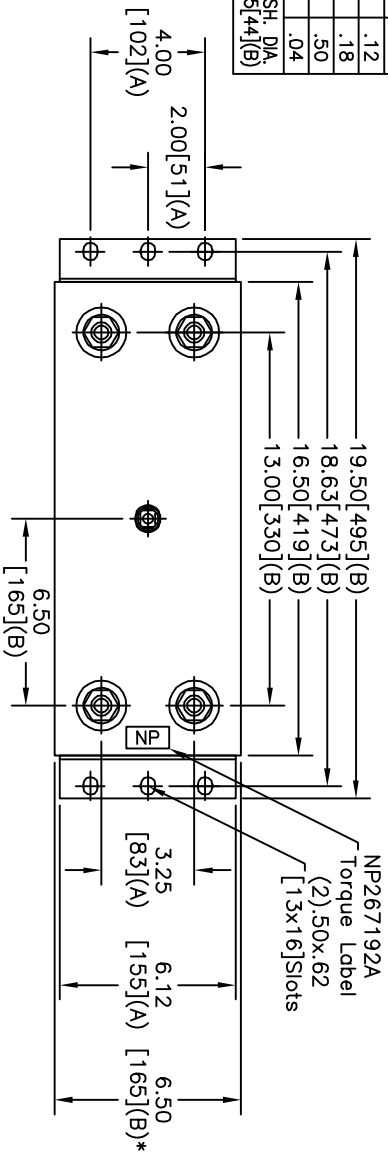

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS. NP267192A

SIZE	DWG NO	SHT	REV
A	19L0785WH4	2	2
REV	DESCRIPTION	DATE	APPROVED
2	101N117L WAS J	5/1/2007	BTR



WITH INTERNAL DISCH RESISTORS
 CAT. 19L0785WH4 SN
 1815KVAR 3300V 300HZ 1PH
 88.42 UF
 3.4 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214
 MADE IN USA

		GE ENERGY FORT EDWARD, N.Y., U.S.A.	
DRAWN	E. McGinn	DATE	8/2/1996
ISSUED		DATE	8/7/1996
SIZE		A	
SCALE		WC1	
Est. Weight		133 lbs.	
OUTLINE		SHEET	2
19L0785WH4		CONT	3

DISTR. TO