
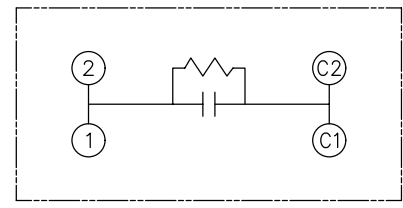


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

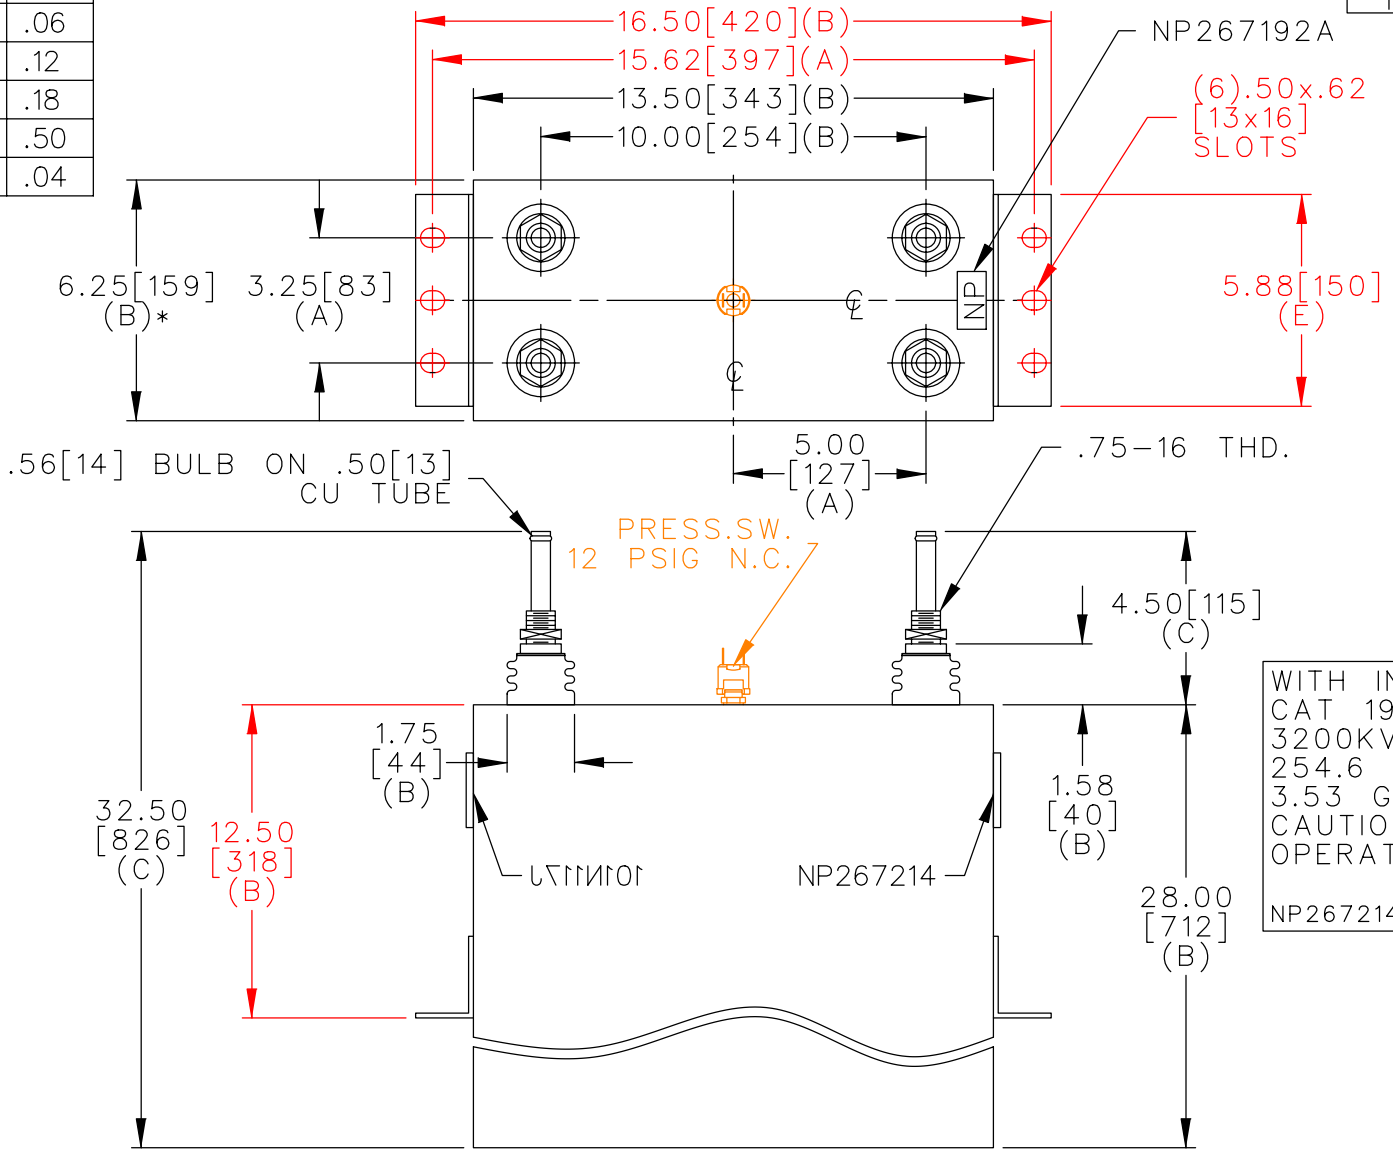

SCHMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS  
 CAT 19L0787WH4 SN  
 3200KVAR 2000V 500HZ 1PH  
 254.6 UF/TAP  
 3.53 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 111 / 50 LB/KG	<b>OUTLINE</b> <b>19L0787WH4</b>	SHEET 2 CONT. 3
	DRAWN E.McGINN	DEC. 18, 1996	SCALE	DISTR TO		
ISSUED	1-8-97					