


TERM	uF	kVAR
1	73.68	333.3
2	73.68	333.3
3	73.68	333.3
4	73.68	333.3
5	73.68	333.3
6	73.68	333.3

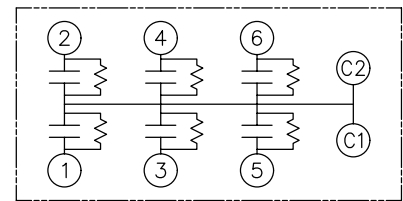

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
CAT 19L0789WH4 SN
2000KVAR 1200V 500HZ 1PH
6X73.68 UF/TAP
2.46 GAL COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

* UP TO +.50 [13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A