



TOL	+/-	BUSH. DIA. 1.75(B)
A	.06	
B	.12	
C	.18	
D	.50	
E	.04	

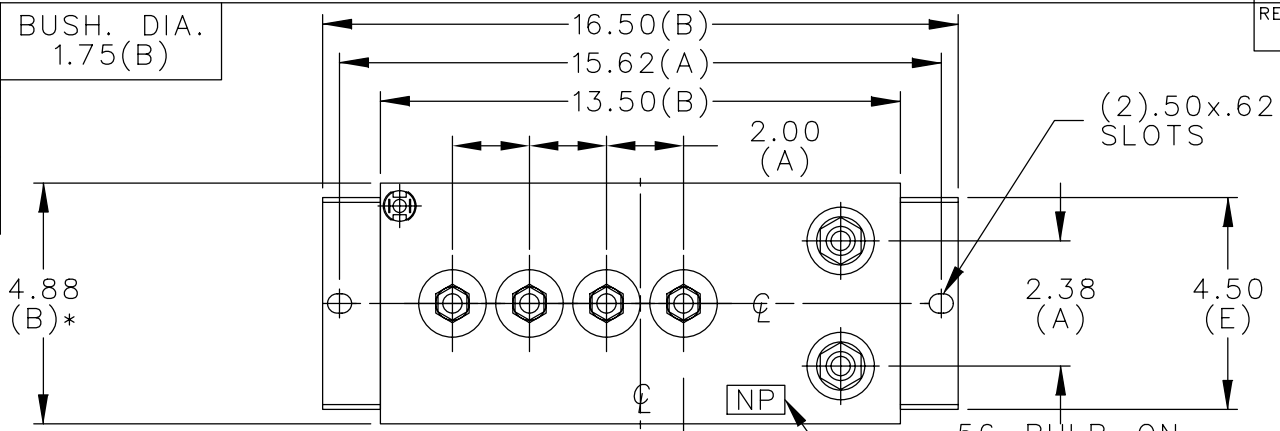


TERM	uF
1	233
2	233
3	467
4	467

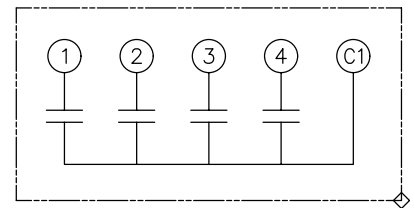

SCHEMATIC DIAGRAM - 400

NO INTERNAL DISCH RESISTORS
 CAT. 19L0837TH4 SN
 800 VDC 1400 uF 1200 AMPS
 233 - 233 - 467 - 467 uF/TAP
 1.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733 & 2739
 NP267214

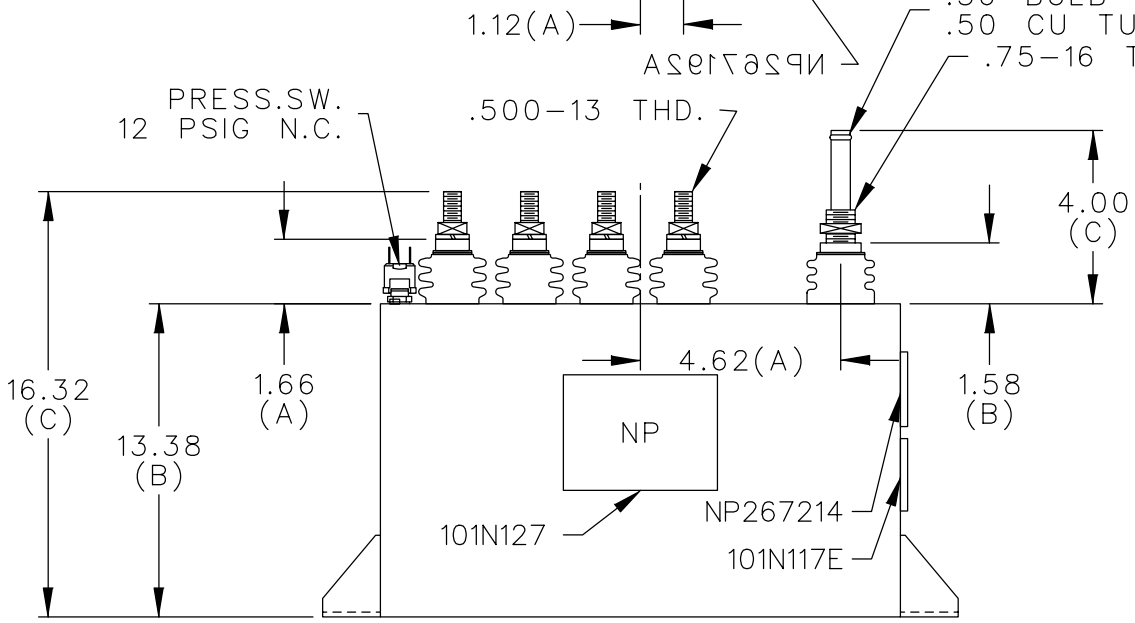

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0837TH4</h2>		DISTR TO
	DRAWN W.DeGROFF	DEC. 26, 1990	SCALE			
ISSUED	1-10-91	SHEET 2	CONT. ON	3		