



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

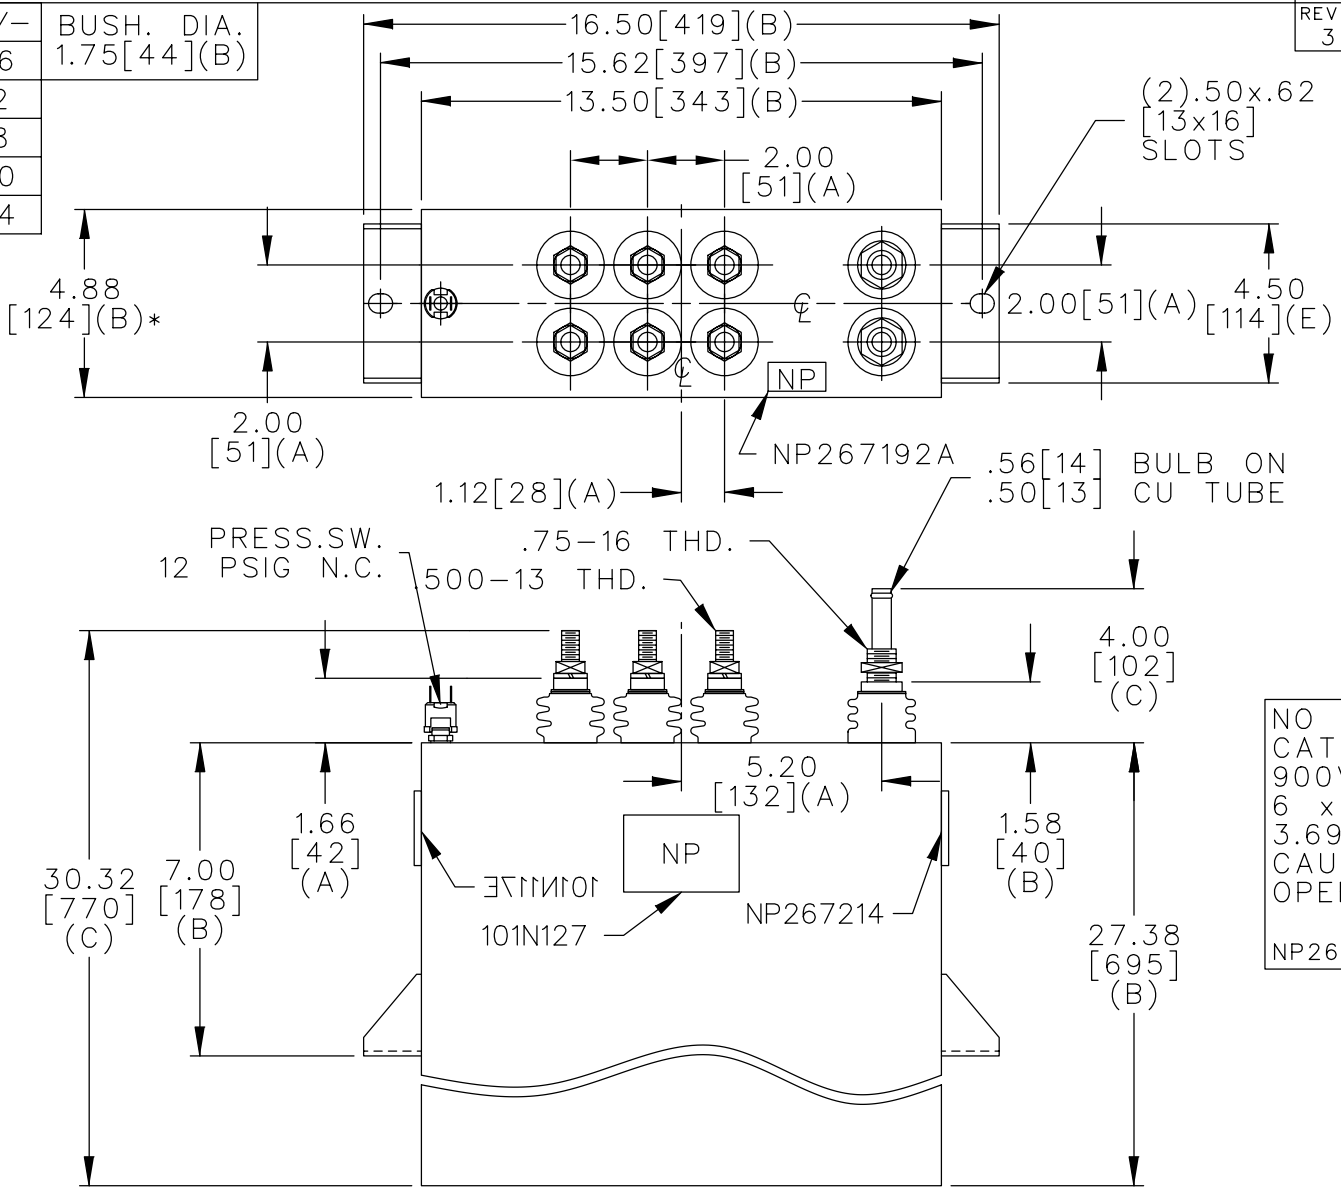

TERM	uF
1	517
2	517
3	517
4	517
5	517
6	517

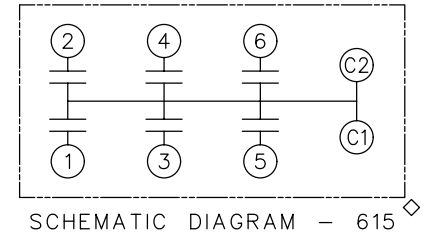

NO INTERNAL DISCH RESISTORS
 CAT. 19L844TH4 SN
 900VDC 3100UF 1800AMPS
 6 x 517 UF/TAP
 3.69 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH2733+2739
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L844TH4</h2>	
	DRAWN W.DeGROFF	JAN. 29, 1991	SCALE		
ISSUED	1-31-91	SHEET 2	CONT. ON 3	DISTR TO	