



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

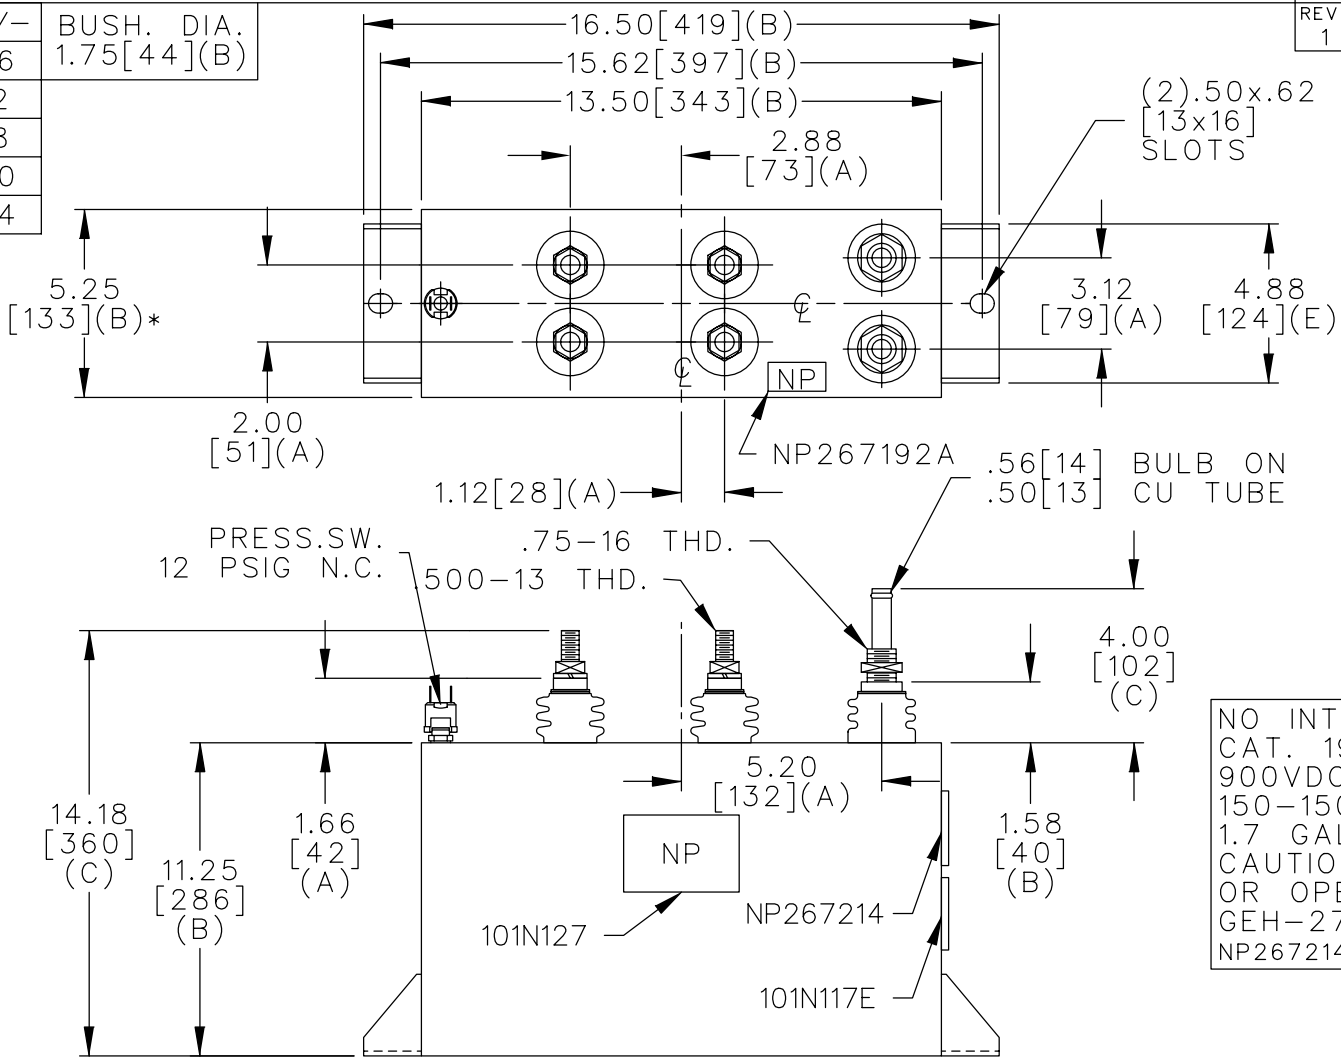

TERM	uF
1	150
2	150
3	150
4	150

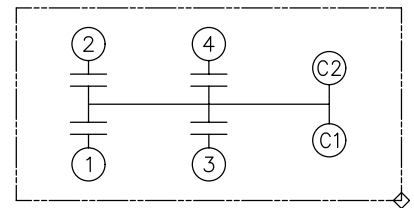

SCHEMATIC DIAGRAM - 420

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0869TH4 SN  
 900VDC 750AMPS .36-6.0 KHZ  
 150-150-150-150 UF/TAP  
 1.7 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733 &  
 GEH-2739  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L0869TH4</h2>	
	DRAWN W.DeGROFF	SEPT. 18, 1991	SCALE		
ISSUED	9-19-91	SHEET	2	CONT. ON	3

DISTR TO