
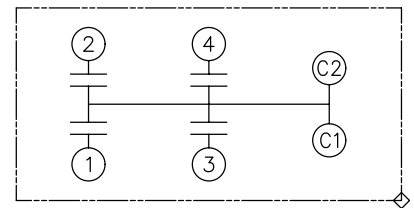


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

TERM	uF
1	424
2	424
3	386
4	386

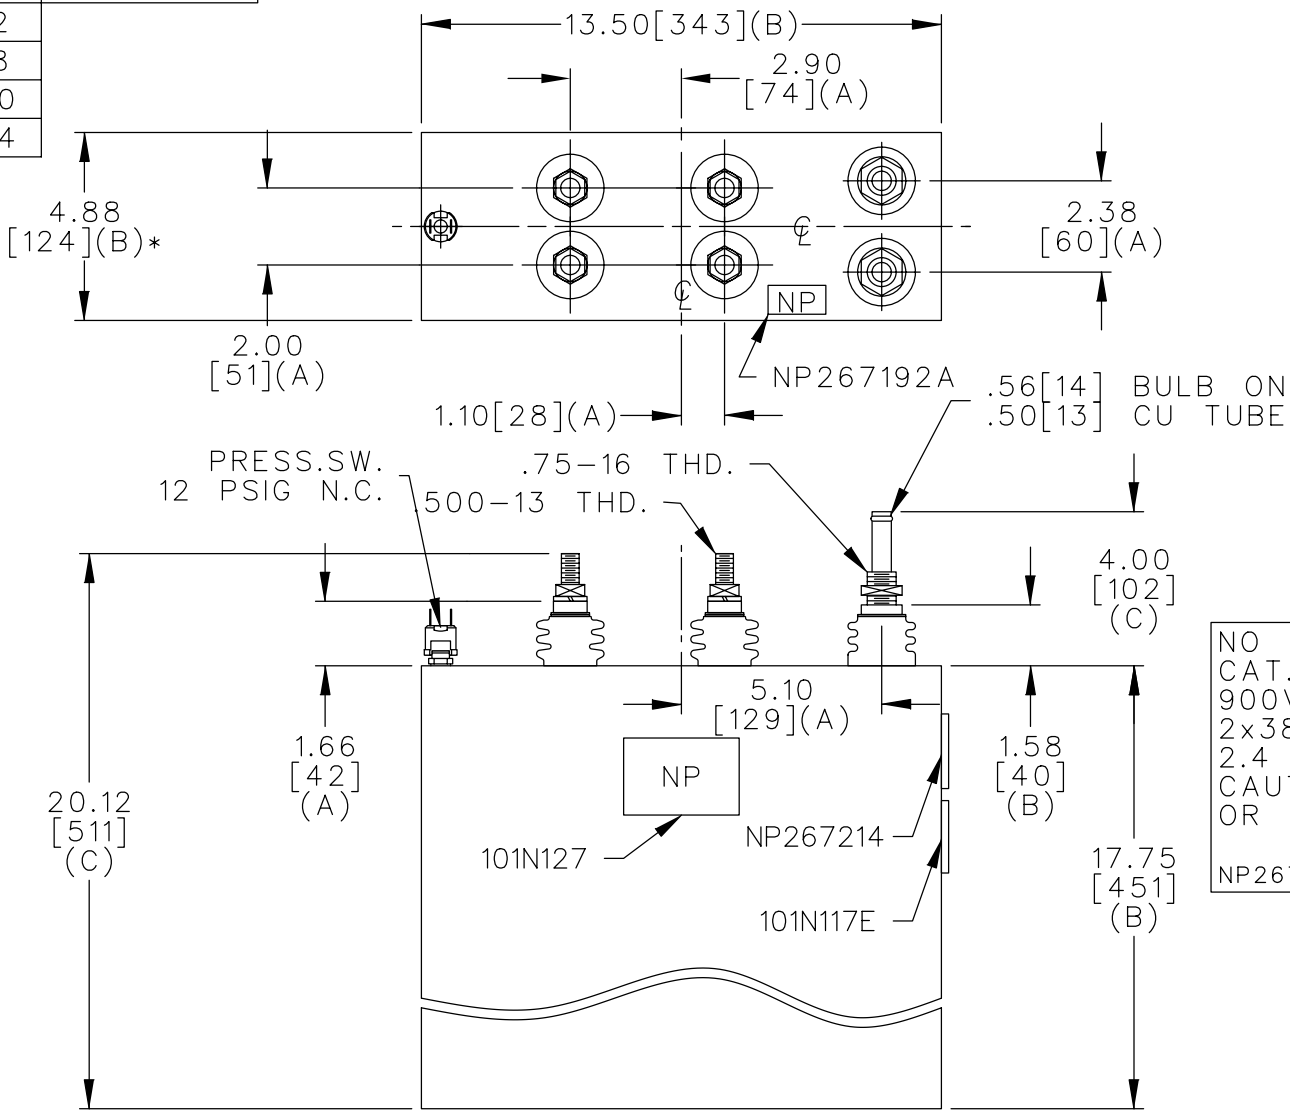

SCHEMATIC DIAGRAM - 420

NO INTERNAL DISCH RESISTORS
 CAT. 19L0875TH2 SN
 900VDC 1620UF 940AMPS
 2x386 + 2x424 UF/TAP
 2.4 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0875TH2	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	APR. 27, 1992	SCALE		
ISSUED	4-27-92	DISTR TO			