



TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.03

SIZE	DWG NO.	SH	REV
A	19L0876TH4	2	
REV			
2	McGINN	ADD PH IN NP	

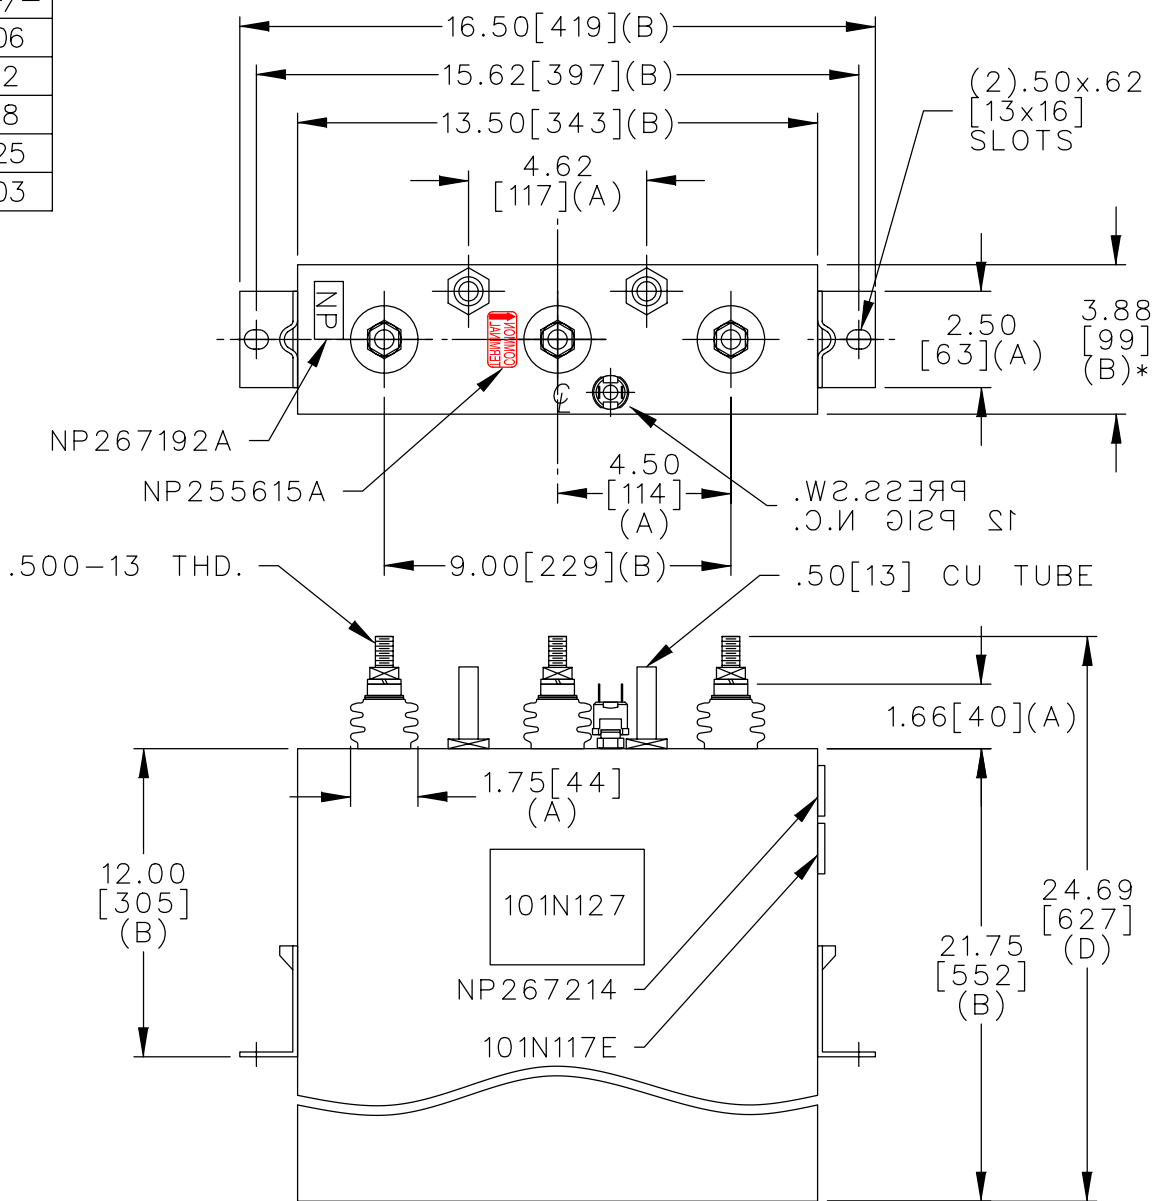

TERM	uF	kVAR
1	368.4	50
2	368.4	50

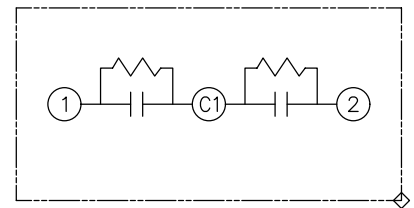

SCHEMATIC DIAGRAM - 227

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0876TH4 SN
 100KVAR 600V 60HZ 1ph
 2 x 368.4 UF/TAP
 2.33 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH2733+2739
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	FSCM NO	OUTLINE 19L0876TH4	DISTR TO
	DRAWN E.McGINN	JUNE 28, 1991	SCALE	SHEET 2 CONT 3		
ISSUED	6-12-91					