



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

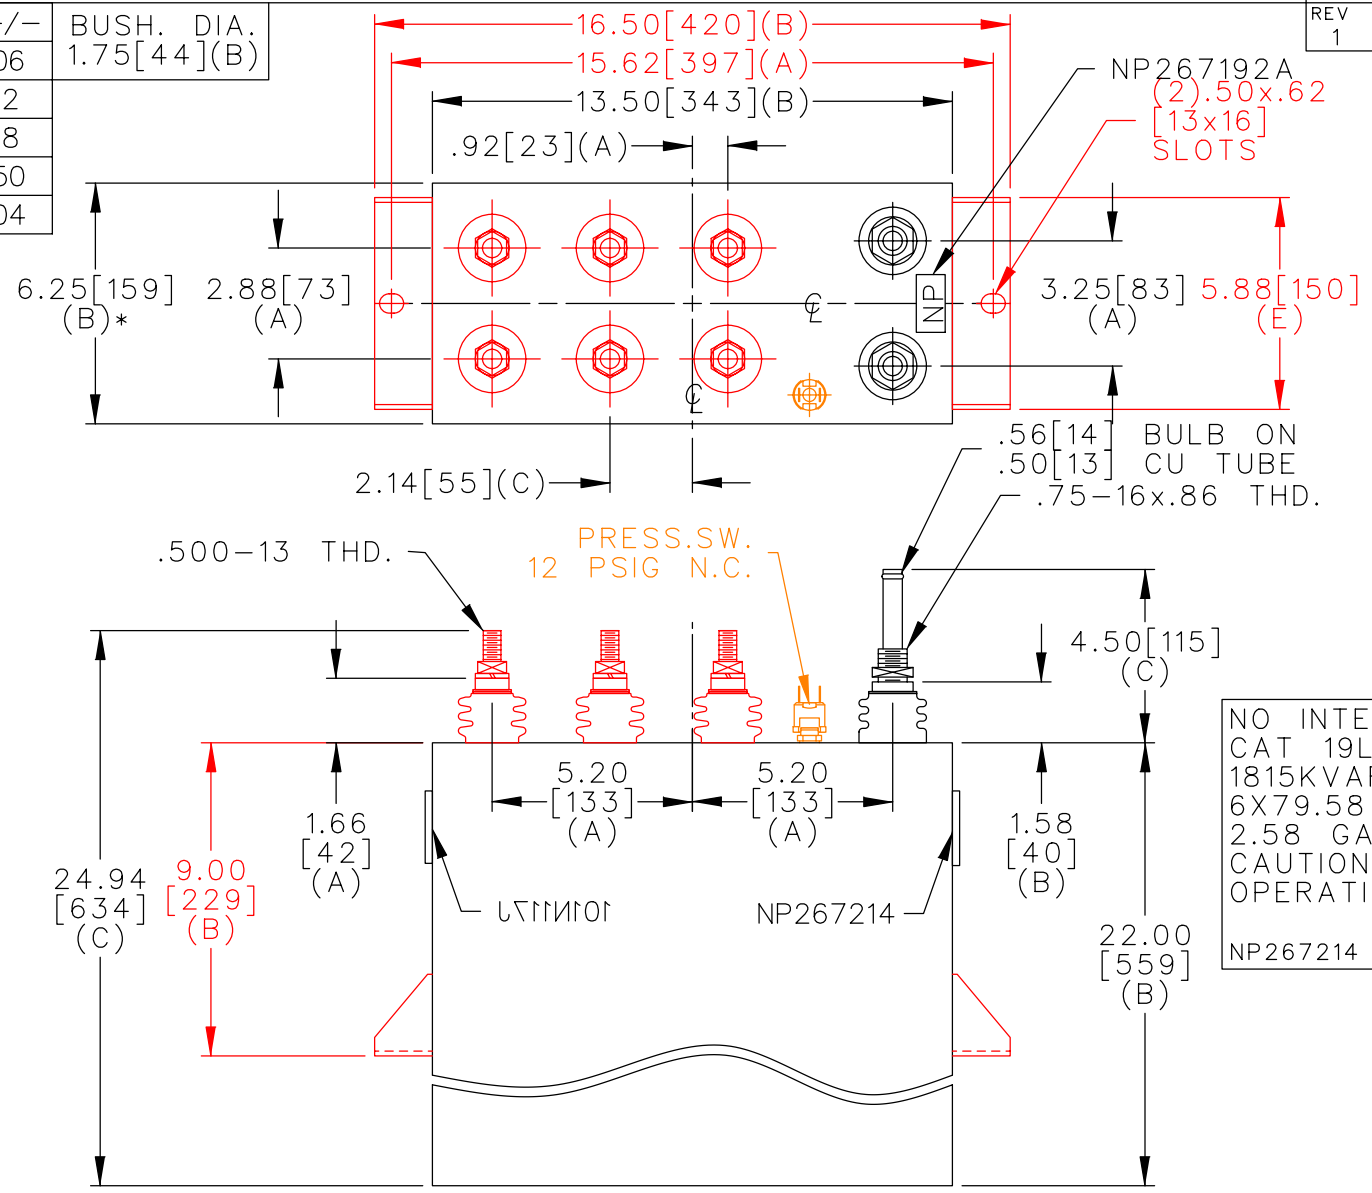

TERM	uF	kVAR
1	79.58	302.5
2	79.58	302.5
3	79.58	302.5
4	79.58	302.5
5	79.58	302.5
6	79.58	302.5

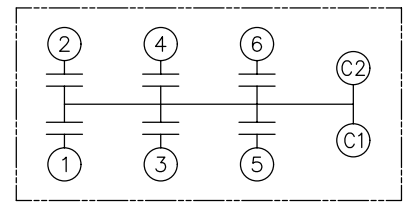

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS  
 CAT 19L0904WH4 SN  
 1815KVAR 1100V 500HZ 1PH  
 6X79.58 UF/TAP  
 2.58 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 97 / 44 LB/KG	<b>OUTLINE</b> <b>19L0904WH4</b>	SHEET 2 CONT. 3 ON ON
	DRAWN 08/28/96	LRD 08/28/96	SCALE WC6	version		
ISSUED						

DISTR TO