

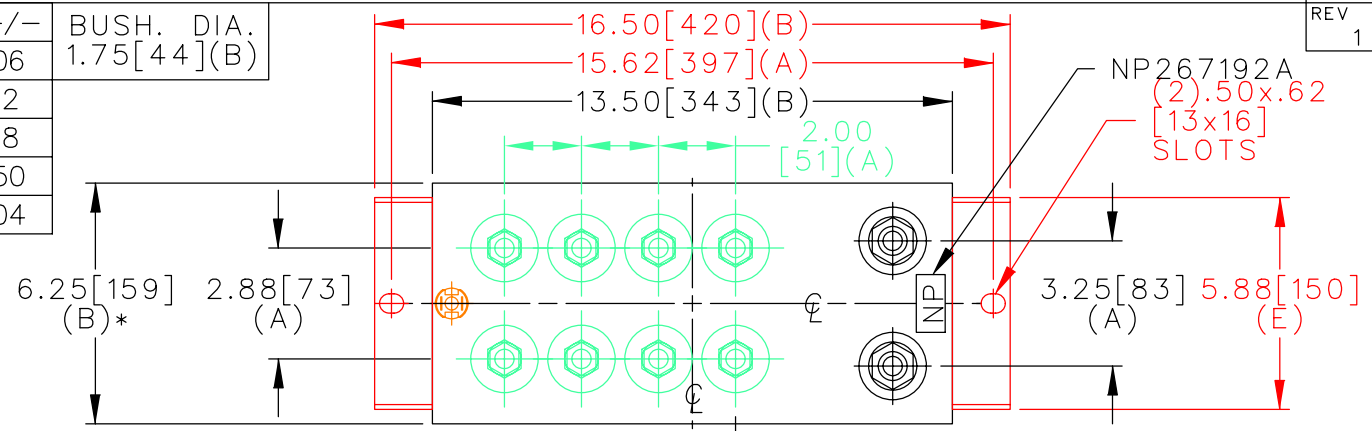


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

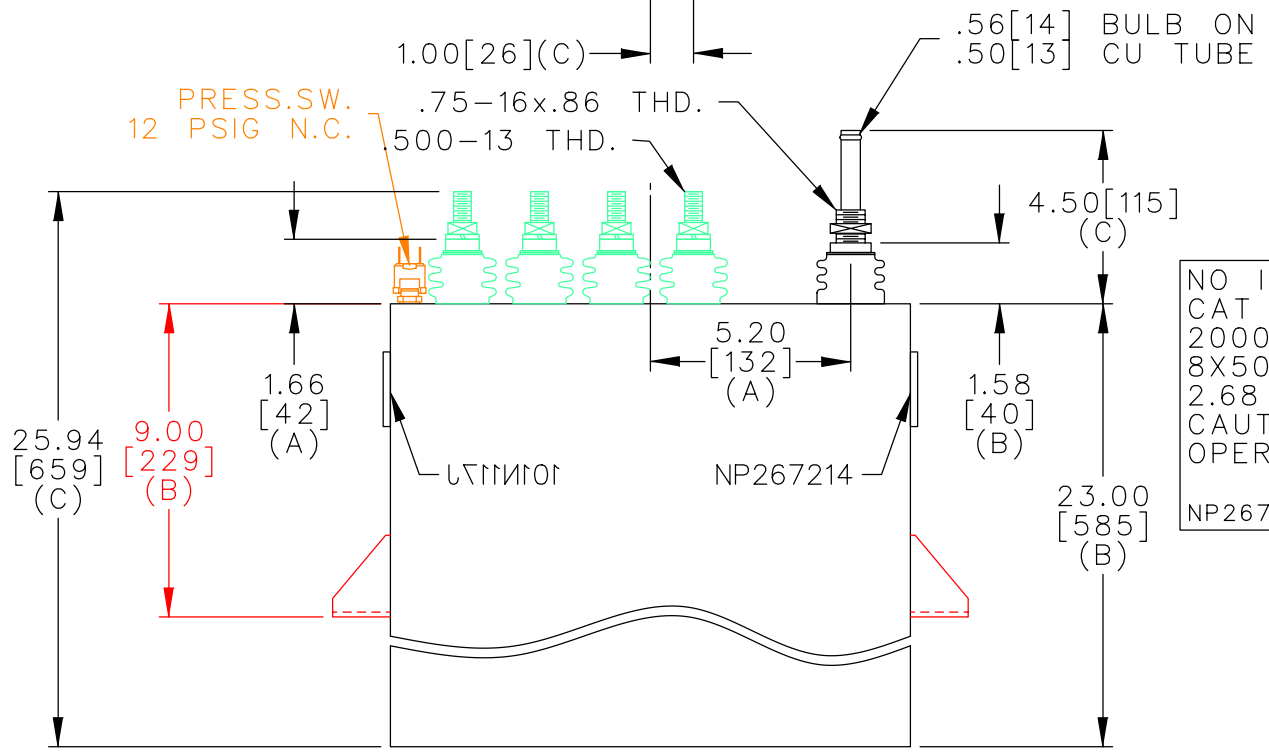

TERM	uF	kVAR
1	50.93	250
2	50.93	250
3	50.93	250
4	50.93	250
5	50.93	250
6	50.93	250
7	50.93	250
8	50.93	250

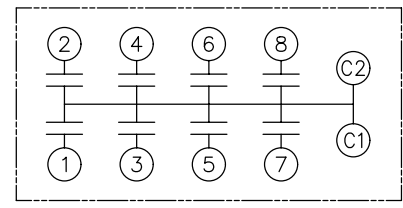

NO INTERNAL DISCH RESISTORS
 CAT 19L0905WH4 SN
 2000KVAR 1250V 500HZ 1PH
 8X50.93 UF/TAP
 2.68 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 100 / 45 LB/KG	OUTLINE 19L0905WH4	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	DEC. 19, 1996	SCALE	DISTR TO		
ISSUED	1-8-97					