



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

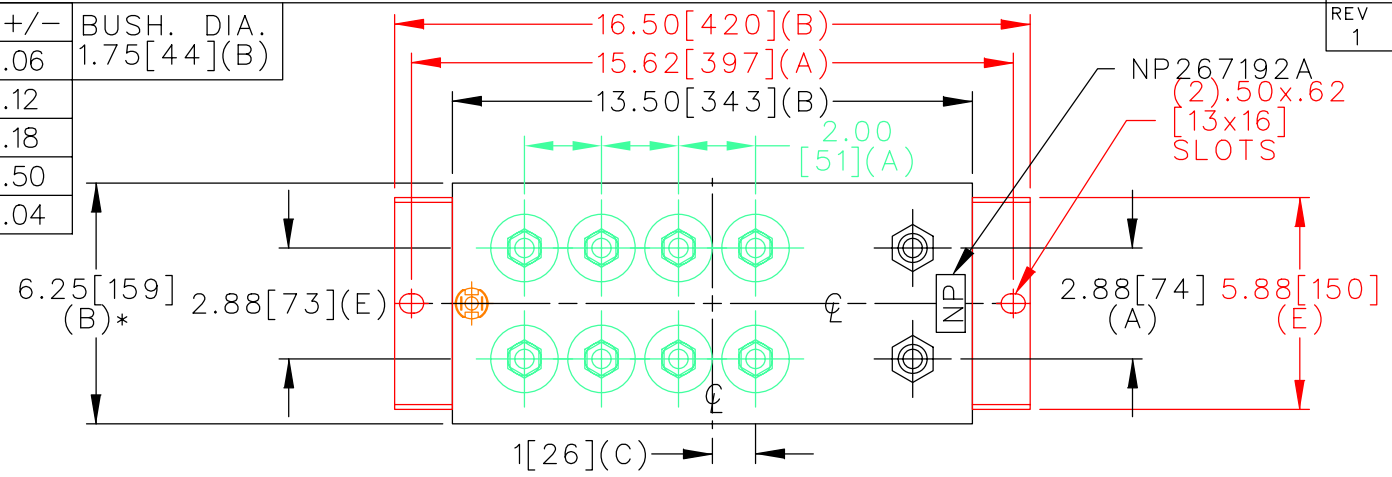


TERM	uF	kVAR
1	39.79	337.5
2	39.79	337.5
3	39.79	337.5
4	39.79	337.5
5	39.79	337.5
6	39.79	337.5
7	39.79	337.5
8	39.79	337.5

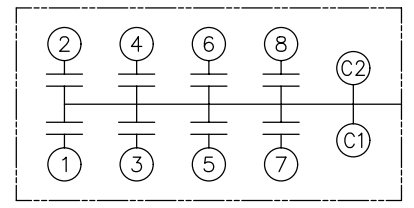

SCHEMATIC DIAGRAM - 801

PRESS.SW.
12 PSIG N.C.

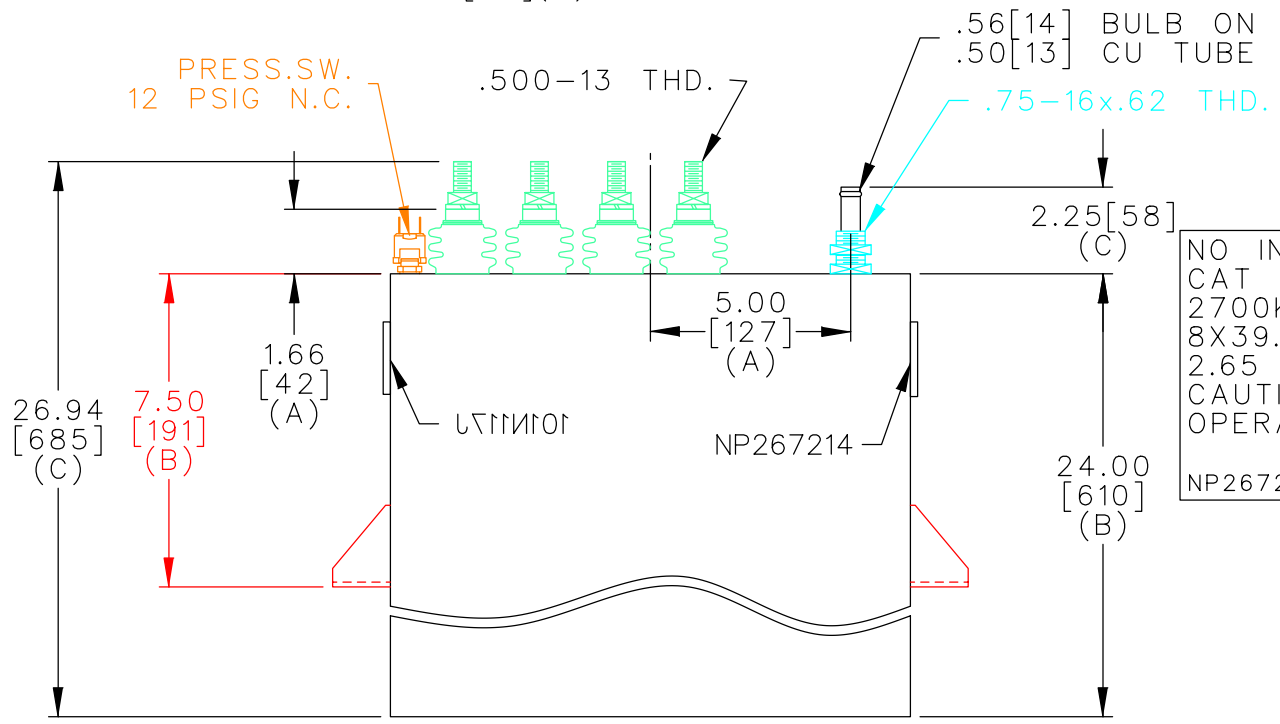

NO INTERNAL DISCH RESISTORS
 CAT 19L0914WH4 SN
 2700KVAR 1500V 600HZ 1PH
 8X39.79 UF/TAP
 2.65 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 112 / 51 LB/KG	OUTLINE 19L0914WH4	SHEET 2 CONT. 3 ON ON
	DRAWN 11/06/96	LRD 11/06/96	SCALE WC12	version		
ISSUED						

DISTR TO