





TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

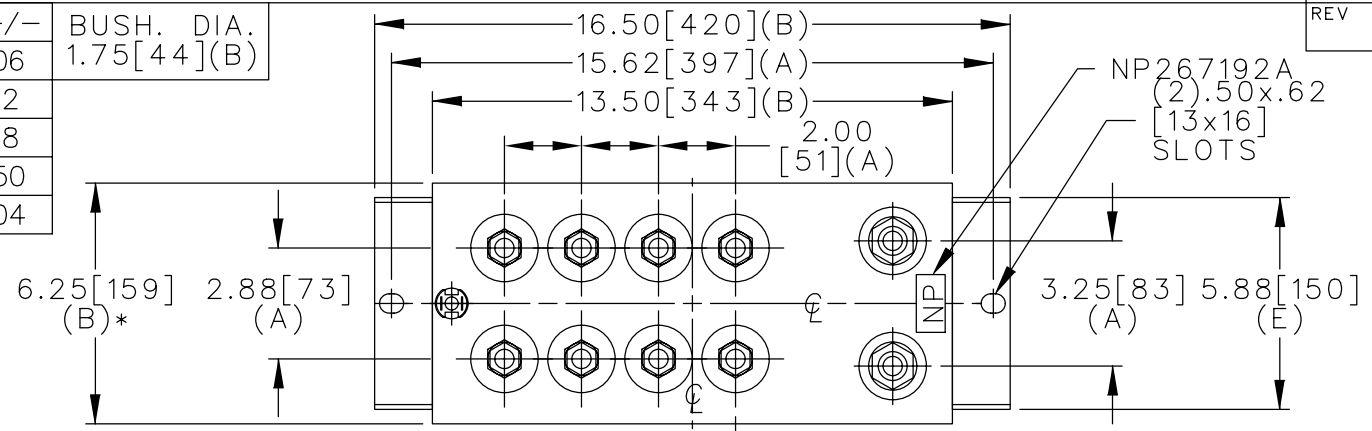

TERM	uF	kVAR
1	59.96	325.5
2	59.96	325.5
3	59.96	325.5
4	59.96	325.5
5	59.96	325.5
6	59.96	325.5
7	59.96	325.5
8	59.96	325.5

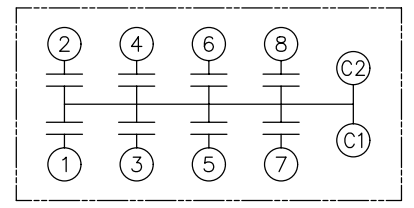

SCHEMATIC DIAGRAM - 800

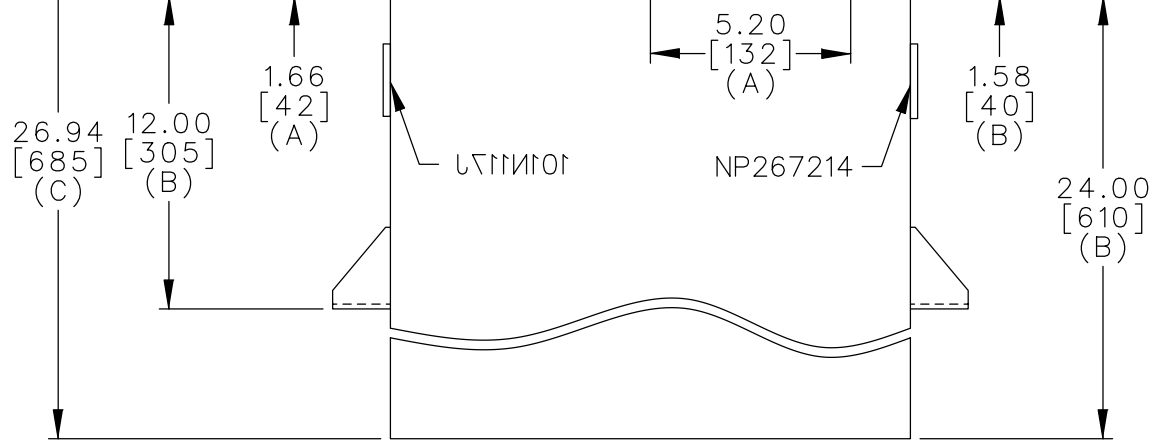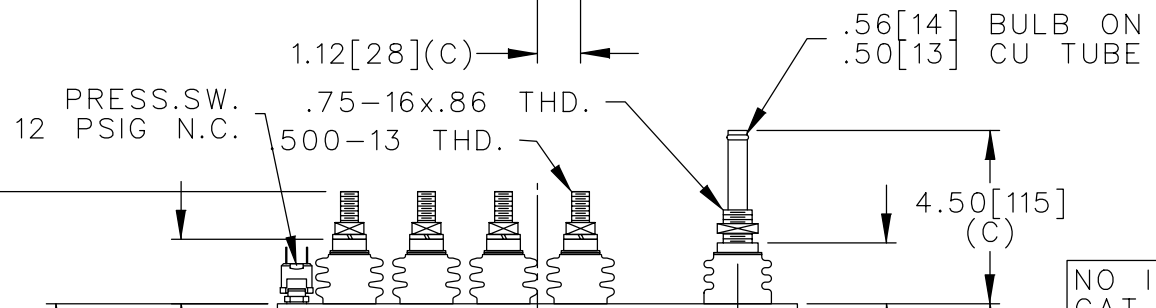

NO INTERNAL DISCH RESISTORS
 CAT 19L0921WH4 SN
 2604KVAR 1200V 600HZ 1PH
 8X59.96 UF/TAP
 2.66 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 114 / 52 LB/KG	OUTLINE 19L0921WH4	DISTR TO
	DRAWN E.McGINN	JULY 22, 1998	SCALE	SHEET 2 CONT. 3		