



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

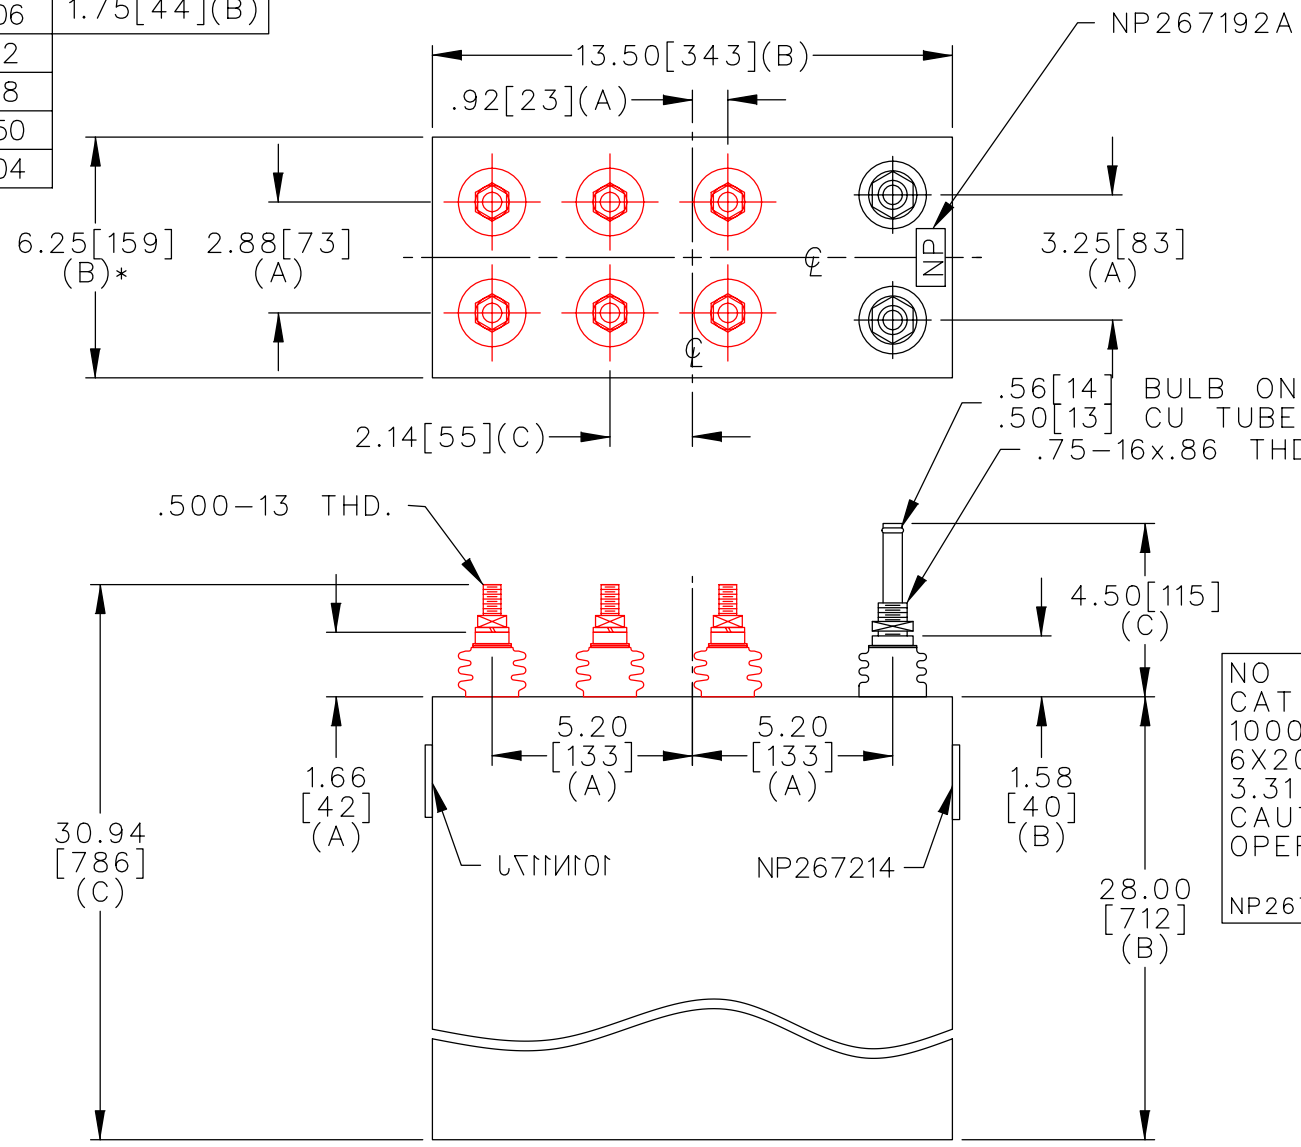

TERM	uF	kVAR
1	207.2	166.7
2	207.2	166.7
3	207.2	166.7
4	207.2	166.7
5	207.2	166.7
6	207.2	166.7

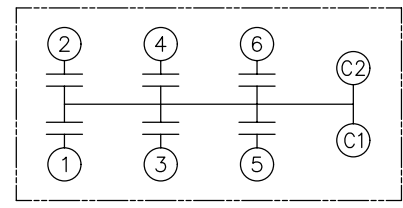

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS  
 CAT 19L0935WH1 SN  
 1000KVAR 800V 200HZ 1PH  
 6X207.2 UF/TAP  
 3.31 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 122 / 55 LB/KG	<h1>OUTLINE</h1> <h2>19L0935WH1</h2>	SHEET 2 CONT. 3 ON ON
	DRAWN 08/29/96	LRD 08/29/96	SCALE WC6	version		
ISSUED						

DISTR TO