



| TOL | +/- | BUSH. DIA. |
|-----|-----|-------------|
| A | .06 | 1.75[44](B) |
| B | .12 | |
| C | .18 | |
| D | .50 | |
| E | .04 | |

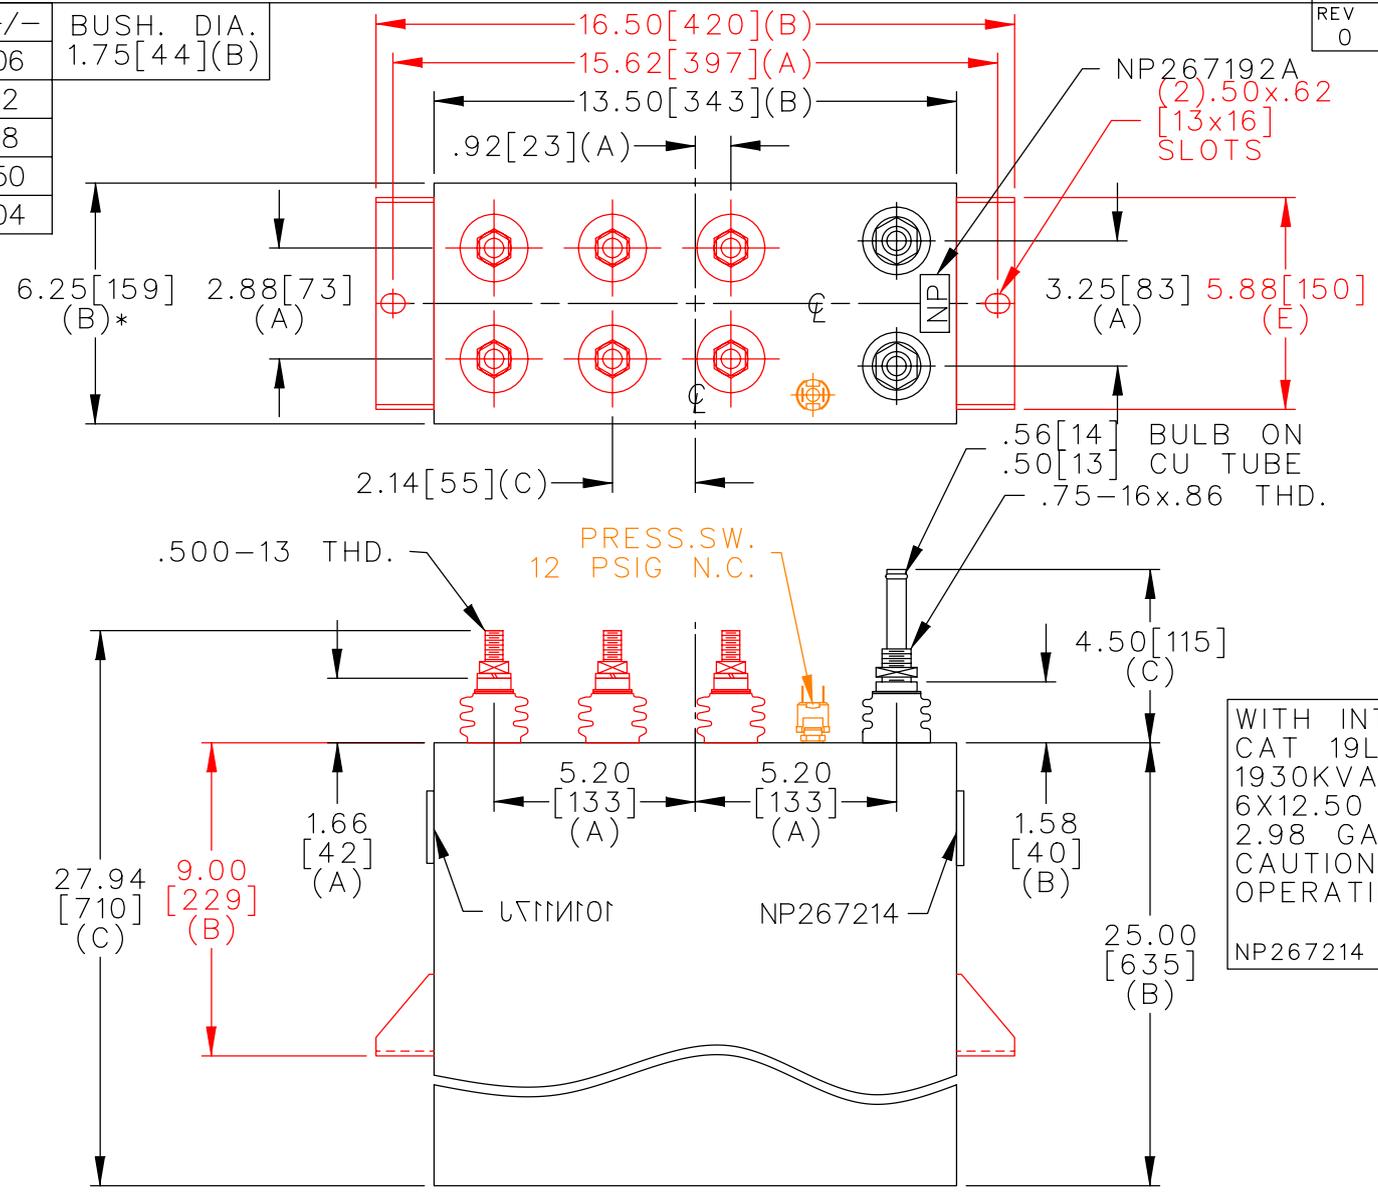

| TERM | uF | kVAR |
|------|------|-------|
| 1 | 12.5 | 321.7 |
| 2 | 12.5 | 321.7 |
| 3 | 12.5 | 321.7 |
| 4 | 12.5 | 321.7 |
| 5 | 12.5 | 321.7 |
| 6 | 12.5 | 321.7 |

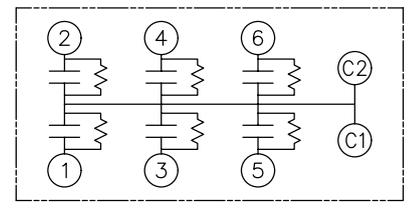

WITH INTERNAL DISCH RESISTORS
 CAT 19L0939WH4 SN
 1930KVAR 3200V 400HZ 1PH
 6X12.50 UF/TAP
 2.98 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

| | | | | | | |
|--------|---|-------|------------------|----------------------------------|--------------------------------------|----------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | | SIZE A | UNIT WEIGHT 106 / 48 LB/KG | <h1>OUTLINE</h1> <h2>19L0939WH4</h2> | DISTR TO |
| | DRAWN 03/23/01 | LRD ? | SCALE WC6 | version | | |
| ISSUED | | | | | | |