



TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.03

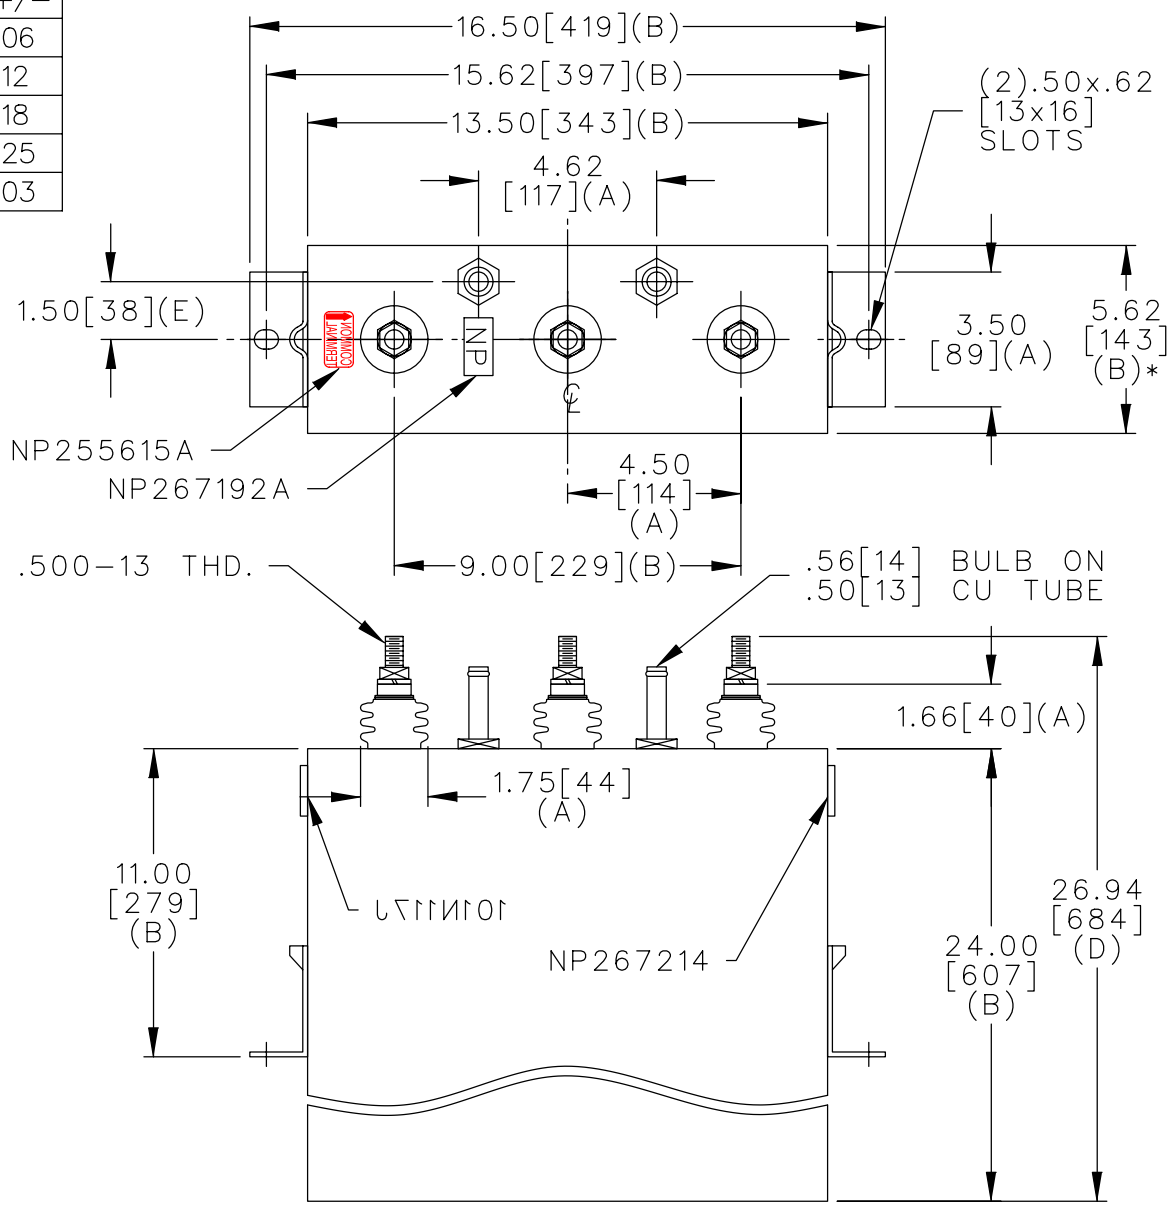

TERM	uF	kVAR
1	345	87.5
2	345	87.5

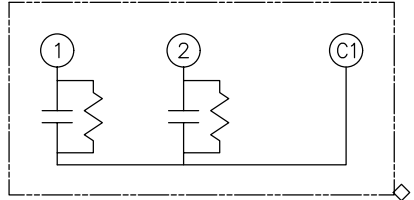

SCHMATIC DIAGRAM - 212

WITH INTERNAL DISCH RESISTORS  
 CAT. 19L0941WD3 SN  
 175KVAR 820V 60HZ  
 2 x 345 UF/TAP  
 3.1 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH2733  
 NP267214

\* UP TO +.50 [13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	FSCM NO	<b>OUTLINE</b> <b>19L0941WH3</b>	DISTR TO
	DRAWN B.ROSS	8/18/00	SCALE	SHEET 2 CONT ON 3		