



TOL	+/-	BUSH, DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

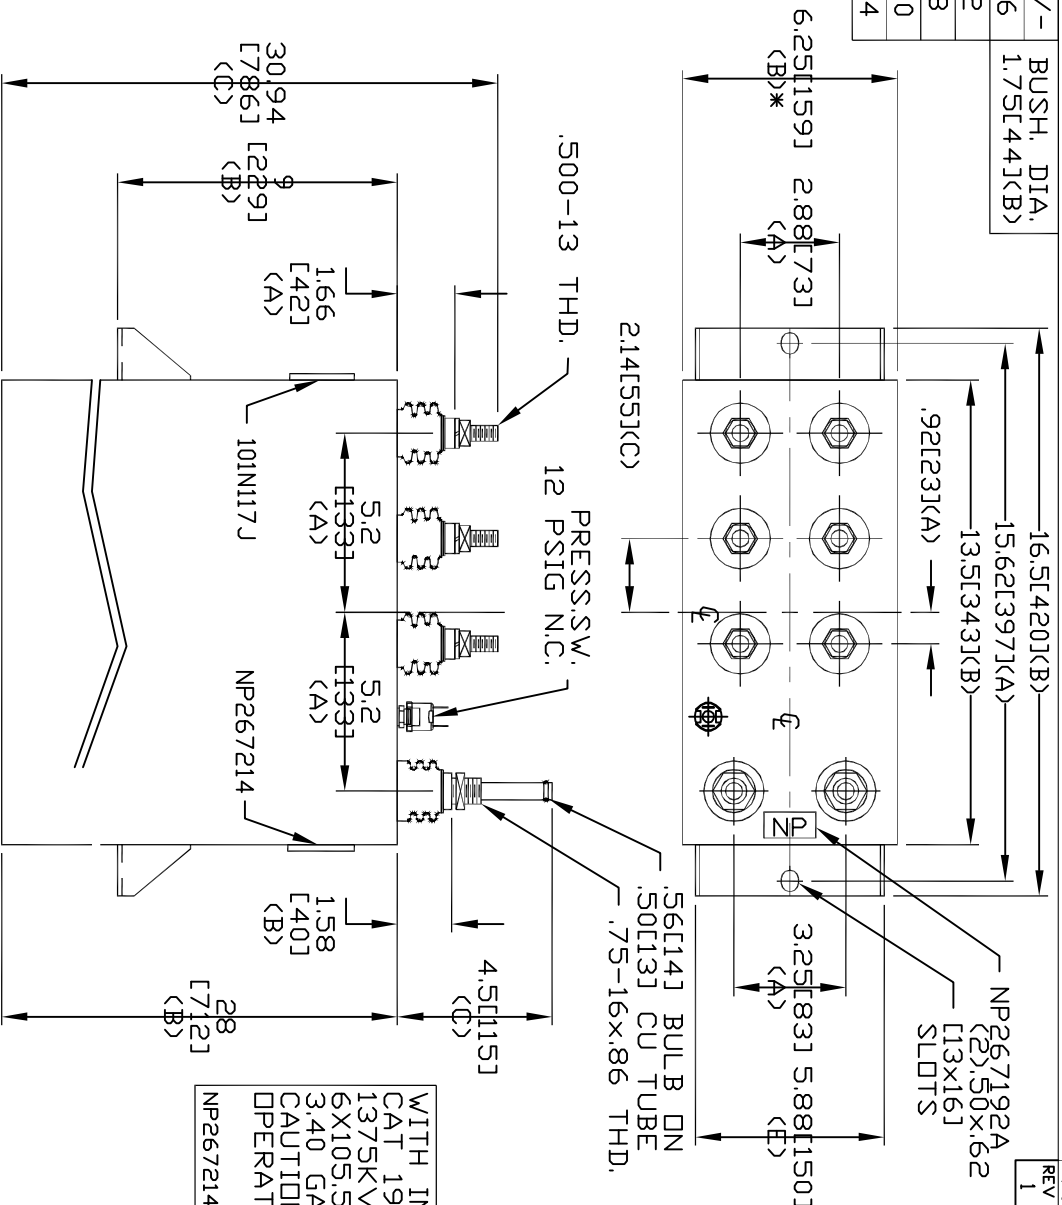

TERM	UF	KVAR
1	105.5	229.2
2	105.5	229.2
3	105.5	229.2
4	105.5	229.2
5	105.5	229.2
6	105.5	229.2

SIZE	DWG. NO.	SH	REV
A	19L0947WH4		
REV	JBC	DATE	
1		03/08/00	



SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L0947WH4 SN
 1375KVAR 1200V 240HZ 1PH
 6X105.5 UF/TAP
 3.40 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING DR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

		CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
ISSUED	DRAWN	LRD	SCALE
08/29/96	08/29/96	08/29/96	A
UNIT WEIGHT		SIZE	
117 / 53		A	
LB/KG		W/C6	
19L0947WH4		version	
DISTR TO		SHEET 2	
		CDT. 3	